



HOFMANN

FLUID POWER, INC.

www.hofmannfluidpower.com



Index

Design and General Information	1
Featured New Products	2
Series M (Minature) – 1/8" Body Size	3-4
Series A (Industrial Interchange) – 1/4" Body Size	5
Series B (Industrial Interchange) – 3/8" Body Size	6
Series C (Industrial Interchange) – 1/2" Body Size	7
Series D (Industrial Interchange) – 3/4" Body Size	8
Series 210 & 310 – 1/4" & 3/8" Body Size	9
Series L (Lincoln Interchange) – 1/4" Body Size	9
Series RL (Ring Lock Interchange) – 3/8" & 1/2" Body Size	10
Series TL (Twist Lock Schraeder Interchange) – 1/4" & 1/2" Body Size	11
Series T (Automotive Interchange) – 1/4" & 3/8" Body Size	12
Series G (ISO A Hydraulic Interchange) – 1/4" - 2" Body Size	13
Series H (ISO B Hydraulic Interchange) – 1/8" - 1 1/2" Body Size	14
Series HH & HI (Snap Tite H & IH Interchange)	15
Series FF (ISO 16028 Flush Face Interface) – 1/8" - 1 1/2" Body Size	16
Series F (ST - Straight Thru Interchange) – 1/8" - 1" Body Size	17
Series HAL & HSS (Cam Lock Interchange) – 3/4" - 3" Body Size	18
Series HJT Sockets (Mold Coolant Interchange) – 1/4", 3/8", 1/2"	19
Series HJT Plugs (Mold Coolant Interchange) – 1/4", 3/8", 1/2"	20
Series PI (Push In Fitting Interchange) – 1/4", 3/8", 1/2"	21
Barbed (Regular & Push Lok) Fittings – 1/8" - 1"	22
Reusable Fittings – 3/16" - 1/2"	23-24
Tees, Elbows & Bulkhead Fittings – 1/8" - 1/2"	25
Sleeve Valves, Lockouts, Blow Guns & Accessories	26
Hose & Tubing – 5/32" - 1/2"	27
Safety Guides	28
Full Size Plug Profiles	29-30
Fluid Compatibility	31
Alpha Numeric Product Listing	32-37
Crossover	38-49



ORDER NUMBERS:

We have eliminated the need for calling out your material requirements on a given part. Catalog order numbers are listed for each item of specific material. Most items with an assigned catalog/order number are stocked and ready for immediate shipment. If a number is missing, or if additional information is required, please contact the factory or local representative.

PLACING AN ORDER:

Use catalog/order numbers exactly as listed. Order sockets and plugs separately, designating a catalog number for each. Select your parts and the order number that correlated with your choice of material and contact the factory or your local representative.

SPECIAL ORDERS:

Contact factory for other grades of stainless steel or special designs not listed in the catalog

PRODUCT FEATURES

QUALITY:

All products included in our catalog are manufactured according to specifications with the highest regard to performance and reliability.

MATERIALS:

Hofmann offers you a wide assortment of materials including brass, steel, stainless steel and the option of chrome or nickel plating on many of our items.

FLEXIBILITY:

Though we include a wide range of sizes and materials in our catalog, we encourage you to approach us with your special requirements.

SEALS:

A variety of seal materials enables Hofmann to provide products for a wide range of media. Check the following chart for specific material and temperature range application.

SEAL MATERIAL	TEMPERATURE RANGE
Buna-N	-40°F to +250°F
Ethylene-Propylene	-65°F to +300°F
Neoprene	-65°F to +300°F
Viton	-20°F to +400°F

COUPLING DESIGN:

All quick disconnect couplings consist of a socket and a plug. The design of the coupler varies due to placement of the shut-off valve. This variation allows you a choice of three types of couplers: a one-way shut-off, a two-way shut-off and a straight-thru.

ONE WAY SHUT-OFFS:

Incorporate a valve in the socket portion which is connected to the upstream pressure side of the coupling. The plug portion has no valve. When you disconnect the coupling the valve shuts off the flow instantaneously on the pressure side.

TWO-WAY SHUT-OFFS:

Incorporate valves in both parts of the coupling, socket and plug. This design is important in hydraulic applications, and where loss of the media being transmitted could cause serious problems when couplings are disconnected.

STRAIGHT-THRU:

Do not have valves in either portion of the coupling. They provide the least resistance for maximum flow, but caution must be exercised in their use. Pressure on lines must be relieved before they are disconnected.

COUPLINGS SELECTION

QUICK DISCONNECT COUPLINGS

– Series A, B, C, D, 210, 310, L, RL, TL, T: One Way

QUICKTITE COUPLINGS – Series QA, QB, QC: One Way

MINIATURES: One Way, Two Way, Straight Thru

CAM LOCK COUPLINGS – Series HAL, HSS: Straight Thru

HYDRAULICS – Series F, FF, H, HH, HI, HJT, G: Two Way

STANDARD TERM OF SALE

All sales by Hofmann Fluid Power, Inc., are governed solely by the provisions of the Illinois Uniform Commercial Code except that (a) Hofmann Fluid Power, Inc. is not responsible for any consequential damages incurred by any customer beyond the purchase price of the goods and (b) the customer must notify Hofmann Fluid Power, Inc. of any defect within 90 days of receipt by the customer of goods sold by Hofmann Fluid Power, Inc. Hofmann Fluid Power, Inc. expressly rejects any terms or conditions contained in any confirmation that are inconsistent with the foregoing.

WARRANTY

All Hofmann products are guaranteed to be free from defects in material and workmanship for a period of 90 days from the date of shipment from the factory.


We will repair or replace any product found to be defective upon our inspection, provided the defect is not caused by misapplication or misuse, negligence or accident. Hofmann will not be responsible for repair work effected by anyone other than an authorized Hofmann representative. This warranty shall not apply to parts or products not manufactured by Hofmann, the warranty of such items being limited to the actual warranty extended to Hofmann by its supplier. We make no other warranty, express or implied.

Specifications and illustrations contained in this catalog may change without notice. Consult factory for confirmation of any order.



Featured New Products

Universal 1/4" Coupler


	Sleeve Guard	Brass	Stainless Steel
	1/4" FNPT	FA2-U	FA2-SS-U
	3/8" FNPT	FA3-U	N/A
	1/4" MNPT	MA2-U	MA2-SS-U
	3/8" MNPT	MA3-U	N/A
	1/4" Hose Barb	SA2-U	SA2-SS-U
	5/16" Hose Barb	SA25-U	N/A
	3/8" Hose Barb	SA3-U	N/A
	1/4" Push-Loc H.B.	SA2-U-PL	N/A
3/8" Push-Loc H.B.	SA3-U-PL	N/A	

Accepting ARO 210, Industrial Interchange, Truflate, Lincoln, Italian Standard, and CEJN 320

WORKING BAR/PSI	BURST Min. BAR/PSI	FLOW
17 (250)	69 (1,000)	70 CFM

Universal coupling has 6 locking balls, a sleeve guard lip to reduce accidental disconnect. Valved to ensure maximum flow and automatic connection with minimal force.

Universal 3/8" Coupler


	Sleeve Guard	Brass
	3/8" FNPT	FB3-U
	1/2" FNPT	FB4-U
	3/8" MNPT	MB3-U
	1/2" MNPT	MB4-U
	3/8" Hose Barb	SB3-U
1/2" Hose Barb	SB4-U	

Accepting ARO 310, Industrial Interchange, Truflate, CEJN 410

WORKING BAR/PSI	BURST Min. BAR/PSI	FLOW
17 (150)	69 (1,000)	136 CFM

Universal coupling has 6 locking balls, sleeve guard lip to reduce accidental disconnection. Valved to ensure maximum flow and automatic connection with minimal force.

Stainless Steel Sleeve Guard Coupler


	Body Size	Connection Type	Brass
	1/4"	1/4" FNPT	FA2-SS-SG
	3/8"	3/8" FNPT	FB3-SS-SG
	1/2"	1/2" FNPT	FC4-SS-SG
	1/4"	1/8" MNPT	MA1-SS-SG
	1/4"	1/4" MNPT	MA2-SS-SG
	3/8"	3/8" MNPT	MB3-SS-SG
	1/2"	1/2" MNPT	MC4-SS-SG
	1/4"	1/4" Hose Barb	SA2-SS-SG
	3/8"	3/8" Hose Barb	SB3-SS-SG
	1/2"	1/2" Hose Barb	SC4-SS-SG

Industrial Interchange

	WORKING BAR/PSI	BURST Min. BAR/PSI	FLOW
1/4"	69 (1,000)	310 (4,500)	37 CFM
3/8"	69 (1,000)	276 (4,000)	70 CFM
1/2"	69 (1,000)	414 (6,000)	150 CFM

All the benefits that stainless steel offers now with the added safety of a sleeve guard. Coupling has 6 locking ball construction Design to help reduce accidental disconnection.

Stainless Steel Automatic Socket


	Body Size	Connection Type	Brass
	1/4"	1/4" FNPT	FA2-SS-Q
	3/8"	3/8" FNPT	FB3-SS-Q
	1/2"	1/2" FNPT	FC4-SS-Q
	1/4"	1/4" MNPT	MA2-SS-Q
	3/8"	3/8" MNPT	MB3-SS-Q
	1/2"	1/2" MNPT	MC4-SS-Q
	1/4"	1/4" Hose Barb	SA2-SS-Q
	3/8"	3/8" Hose Barb	SB3-SS-Q
	1/2"	1/2" Hose Barb	SC4-SS-Q

Industrial Interchange

	WORKING BAR/PSI	BURST Min. BAR/PSI	FLOW
1/4"	69 (1,000)	310 (4,500)	37 CFM
3/8"	69 (1,000)	276 (4,000)	70 CFM
1/2"	69 (1,000)	414 (6,000)	150 CFM


Automatic (one-handed connection) socket in stainless steel. Disconnection only by retracting sleeve. Convenient push to connect, mates with industrial interchange plugs.

Tube Fittings 316SS

	STRAIGHT FITTINGS	MNPT Bulkhead
	90 ELBOWS	Tee Union cross
	TUBE ADAPTERS	Male Female

- Gaugeability to check gap between nut and body hex, to ensure safety and reliability. Great for easy inspection.
- Temperatures up to 380°C.
- Fittings have deep vacuum capability, quality tubing required.
- MATERIAL, 316SS, silver plated threads on nuts to reduce galling.
- Call for more information.

Nickel Plated Brass Flow Control Valves

	• Flow control valves MNPT, x push in fitting, nickel plated brass.
	• Call for available sizes.
	• Operating pressure of 217 P.S.I.
	• Thread sealant pre applied to threads.
	• Knurled knob, no need to look for screw driver to adjust.
	• Call for more information.

Series M

Miniature Couplings – One & Two Way

1/8" Body Size
Maximum 300 PSI



Sockets (Valved)

FNPT	Thread	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	F1-M	F1-M-C *	F1-M-EN	F1-M-SS
	1/4"	F2-M	F2-M-C *	F2-M-EN	N/A

MNPT	Thread	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	M1-M	M1-M-C *	M1-M-EN	M1-M-SS
	1/4"	M2-M	M2-M-C *	M2-M-EN	M2-M-SS

HOSE BARB	Hose I.D.	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	N/A	N/A	N/A	N/A
	3/16"	S1-M	S1-M-C *	S1-M-EN	S1-M-SS
	1/4"	S2-M	S2-M-C *	S2-M-EN	S2-M-SS

REUSABLE	Reusable Hose End	Brass	Chrome	Electroless Nickel	Stainless
	3/16" I.D. x 3/8" O.D.	RK1-M	RK1-M-C *	RK1-M-EN	RK1-M-SS

TUBE CONNECTION	Tube O.D.	Brass	Chrome	Electroless Nickel	Stainless
	1/4"	M1-MIT	M1-MIT-C *	M1-MIT-EN	N/A

Plugs (1-Way/Unvalved)

FNPT	Thread	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	FP1-M	FP1-M-C *	FP1-M-EN	FP1-M-SS
	1/4"	FP2-M	FP2-M-C *	FP2-M-EN	N/A

MNPT	Thread	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	MP1-M	MP1-M-C *	MP1-M-EN	MP1-M-SS
	1/4"	MP2-M	MP2-M-C *	MP2-M-EN	MP2-M-SS

HOSE BARB	Hose I.D.	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	SP0-M	SP0-M-C *	SP0-M-EN	N/A
	3/16"	SP1-M	SP1-M-C *	SP1-M-EN	N/A
	1/4"	SP2-M	SP2-M-C *	SP2-M-EN	N/A

TUBE CONNECTION	Tube O.D.	Brass	Chrome	Electroless Nickel	Stainless
	1/4"	MP1-MIT	MP1-MIT-C *	MP1-MIT-EN	N/A

Plugs (2-Way/Valved)

FNPT	Thread	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	FP1-MV	FP1-MV-C *	FP1-MV-EN	FP1-MV-SS
	1/4"	FP2-MV	FP2-MV-C *	FP2-MV-EN	N/A

MNPT	Thread	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	MP1-MV	MP1-MV-C *	MP1-MV-EN	MP1-MV-SS
	1/4"	MP2-MV	MP2-MV-C *	MP2-MV-EN	MP2-MV-SS

HOSE BARB	Hose I.D.	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	N/A	N/A	N/A	N/A
	3/16"	SP1-MV	SP1-MV-C *	SP1-MV-EN	N/A
	1/4"	SP2-MV	SP2-MV-C *	SP2-MV-EN	N/A

TUBE CONNECTION	Tube O.D.	Brass	Chrome	Electroless Nickel	Stainless
	1/4"	MP1-MIT-MV	MP1-MIT-MV-C *	MP1-MIT-MV-EN	N/A

TIP Configuration



Miniature Couplers

- One-way valved
- Two-way valved
- Straight thru

Valved Sockets

Only connect with one way or two way valved sockets.

- * Must use a straight thru socket with a straight thru plug only, will not work with one-way or two-way valve plugs.

VALVED SOCKET SPECS

Brass Sockets

Brass Body
Brass Sleeve
440 Stainless Balls
302 Stainless Springs
Nickel Plated Brass Valve
Viton Seal

Chrome Sockets

Chrome Plated
Brass Body
Chrome Plated
Brass Sleeve
440 Stainless Balls
302 Stainless Springs
Nickel Plated Brass Valve
Viton Seal

Stainless Sockets

303 Stainless Body
303 Stainless Sleeve
302 Stainless Balls
302 Stainless Springs
Nickel Plated Brass Valve
Viton Seal

Electroless Nickel Sockets

Electroless Nickel Plated
Brass Body
Electroless Nickel Plated
Brass Sleeve
440 Stainless Balls
302 Stainless Springs
Nickel Plated Brass Valve
Viton Seal

STRAIGHT THRU SOCKET SPECS

Same as valved socket specs less the nickel plated brass valve core.

Plug Construction

Plug Brass
Plug 303 Stainless Steel
Plug Chrome Plated Brass
Plug Electroless Nickel Plated Brass





Series M

Miniature Couplings – Straight Thru

1/8" Body Size
Maximum 300 PSI

Sockets (Unvalved)

FNPT	Thread	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	F1-MST	F1-MST-C *	F1-MST-EN	F1-MST-SS
	1/4"	F2-MST	F2-MST-C *	F2-MST-EN	N/A

MNPT	Thread	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	M1-MST	M1-MST-C *	M1-MST-EN	M1-MST-SS
	1/4"	M2-MST	M2-MST-C *	M2-MST-EN	M2-MST-SS

HOSE BARB	Hose I.D.	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	S0-MST	S0-MST-C *	S0-MST-EN	N/A
	3/16"	S1-MST	S1-MST-C *	S1-MST-EN	S1-MST-SS
	1/4"	S2-MST	S2-MST-C *	S2-MST-EN	S2-MST-SS

REUSABLE	Reusable Hose End I.D. x O.D.	Brass	Chrome	Electroless Nickel	Stainless
	3/16" x 3/8"	RK1-MST	RK1-MST-C *	RK1-MST-EN	RK1-MST-SS

TUBE CONNECTION	Tube O.D.	Brass	Chrome	Electroless Nickel	Stainless
	1/4"	M1-MIT-ST	M1-MIT-ST-C *	M1-MIT-ST-EN	N/A

Plugs (Unvalved)

FNPT	Thread	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	FP1-MST	FP1-MST-C *	FP1-MST-EN	FP1-MST-SS
	1/4"	FP2-MST	FP2-MST-C *	FP2-MST-EN	N/A

MNPT	Thread	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	MP1-MST	MP1-MST-C *	MP1-MST-EN	MP1-MST-SS
	1/4"	MP2-MST	MP2-MST-C *	MP2-MST-EN	MP2-MST-SS

HOSE BARB	Hose I.D.	Brass	Chrome	Electroless Nickel	Stainless
	1/8"	SP0-MST	SP0-MST-C *	SP0-MST-EN	N/A
	3/16"	SP1-MST	SP1-MST-C *	SP1-MST-EN	N/A
	1/4"	SP2-MST	SP2-MST-C *	SP2-MST-EN	N/A

TUBE CONNECTION	Tube O.D.	Brass	Chrome	Electroless Nickel	Stainless
	1/4"	MP1-MIT-ST	MP1-MIT-ST-C *	MP1-MIT-ST-EN	N/A

TIP Configuration



Miniature Couplers

- One-way valved
- Two-way valved
- Straight thru

Valved Sockets

Only connect with one way or two way valved sockets.

* Must use a straight thru socket with a straight thru plug only, will not work with one-way or two-way valve plugs.

VALVED SOCKET SPECS

Brass Sockets
Brass Body
Brass Sleeve
440 Stainless Balls
302 Stainless Springs
Nickel Plated Brass Valve
Viton Seal

Chrome Sockets

Chrome Plated
Brass Body
Chrome Plated
Brass Sleeve
440 Stainless Balls
302 Stainless Springs
Nickel Plated Brass Valve
Viton Seal

Stainless Sockets

303 Stainless Body
303 Stainless Sleeve
302 Stainless Balls
302 Stainless Springs
Nickel Plated Brass Valve
Viton Seal

Electroless Nickel Sockets

Electroless Nickel Plated
Brass Body
Electroless Nickel Plated
Brass Sleeve
440 Stainless Balls
302 Stainless Springs
Nickel Plated Brass Valve
Viton Seal

STRAIGHT THRU SOCKET SPECS

Same as valved socket specs less the nickel plated brass valve core.

Plug Construction

Plug Brass
Plug 303 Stainless Steel
Plug Chrome Plated Brass
Plug Electroless Nickel Plated Brass





Sockets (Valved)

FNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	1/8"	FA1	FA1-B	FA1-BC *	FA1-EN	FA1-SS	FA1-Q	N/A	FA1-SG
	1/4"	FA2	FA2-B	FA2-BC *	FA2-EN	FA2-SS	FA2-Q	SVFA2	FA2-SG
	3/8"	FA3	FA3-B	FA3-BC *	FA3-EN	FA3-SS	FA3-Q	SVFA3	FA3-SG

MNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	1/8"	MA1	MA1-B	MA1-BC *	MA1-EN	MA1-SS	MA1-Q	N/A	MA1-SG
	1/4"	MA2	MA2-B	MA2-BC *	MA2-EN	MA2-SS	MA2-Q	SVMA2	MA2-SG
	3/8"	MA3	MA3-B	MA3-BC *	MA3-EN	MA3-SS	MA3-Q	SVMA3	MA3-SG

HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	1/4"	SA2	SA2-B	SA2-BC *	SA2-EN	SA2-SS	SA2-Q	SVSA2	SA2-SG
	5/16"	SA25	SA25-B	SA25-BC *	SA25-EN	SA25-SS	SA25-Q	N/A	SA25-SG
	3/8"	SA3	SA3-B	SA3-BC *	SA3-EN	SA3-SS	SA3-Q	SVSA3	SA3-SG

PL HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	1/4"	SA2-PL	SA2-B-PL	N/A	SA2-EN-PL	SA2-SS-PL	SA2-Q-PL	N/A	SA2-SG-PL
	3/8"	SA3-PL	SA3-B-PL	N/A	SA3-EN-PL	SA3-SS-PL	SA3-Q-PL	N/A	SA3-SG-PL

REUSABLE	Reusable Hose End	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series
	3/16" x 3/8"	RKA1	RKA1-B	RKA1-BC *	RKA1-EN	RKA1-SS	RKA1-Q
	1/4" x 7/16"	RKA21	RKA21-B	RKA21-BC *	RKA21-EN	RKA21-SS	RKA21-Q
	1/4" x 15/32"	N/A	N/A	N/A	N/A	RKA22-SS	N/A
	1/4" x 1/2"	RKA2	RKA2-B	RKA2-BC *	RKA2-EN	RKA2-SS	RKA2-Q
	1/4" x 9/16"	RKA15	RKA15-B	RKA15-BC *	RKA15-EN	RKA15-SS	RKA15-Q
	1/4" x 5/8"	RKA27	RKA27-B	RKA27-BC *	RKA27-EN	RKA27-SS	RKA27-Q
	5/16" x 5/8"	RKA25	RKA25-B	RKA25-BC *	RKA25-EN	RKA25-SS	RKA25-Q
	3/8" x 5/8"	RKA37	RKA37-B	RKA37-BC *	RKA37-EN	RKA37-SS	RKA37-Q
	3/8" x 11/16"	RKA38	RKA38-B	RKA38-BC *	RKA38-EN	RKA38-SS	RKA38-Q
	3/8" x 3/4"	RKA3	RKA3-B	RKA3-BC *	RKA3-EN	RKA3-SS	RKA3-Q

Plugs (Unvalved)

FNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	1/8"	FPA1	FPA1-B	FPA1-BC *	FPA1-EN	FPA1-SS
	1/4"	FPA2	FPA2-B	FPA2-BC *	FPA2-EN	FPA2-SS
	3/8"	FPA3	N/A	N/A	N/A	FPA3-SS

MNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	1/8"	MPA1	MPA1-B	MPA1-BC *	MPA1-EN	MPA1-SS
	1/4"	MPA2	MPA2-B	MPA2-BC *	MPA2-EN	MPA2-SS
	3/8"	MPA3	MPA3-B	MPA3-BC *	MPA3-EN	MPA3-SS

HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	1/4"	SPA2	SPA2-B	SPA2-BC *	SPA2-EN	SPA2-SS
	5/16"	SPA25	N/A	N/A	N/A	N/A
	3/8"	SPA3	SPA3-B	SPA3-BC *	SPA3-EN	SPA3-SS

PL HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	1/4"	SPA2-PL	SPA2-B-PL	N/A	SPA2-EN-PL	SPA2-SS-PL
	5/16"	N/A	N/A	N/A	N/A	N/A
	3/8"	SPA3-PL	SPA3-B-PL	N/A	SPA3-EN-PL	SPA3-SS-PL

REUSABLE	Reusable Hose End	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	3/16" x 3/8"	PA1	PA1-B	PA1-BC *	PA1-EN	PA1-SS
	1/4" x 7/16"	PA21	PA21-B	PA21-BC *	PA21-EN	PA21-SS
	1/4" x 15/32"	N/A	N/A	N/A	N/A	PA22-SS
	1/4" x 1/2"	PA2	PA2-B	PA2-BC *	PA2-EN	PA2-SS
	1/4" x 9/16"	PA15	PA15-B	PA15-BC *	PA15-EN	PA15-SS
	1/4" x 5/8"	PA27	PA27-B	PA27-BC *	PA27-EN	PA27-SS
	5/16" x 5/8"	PA25	PA25-B	PA25-BC *	PA25-EN	PA25-SS
	3/8" x 5/8"	PA37	PA37-B	PA37-BC *	PA37-EN	PA37-SS
	3/8" x 11/16"	PA38	PA38-B	PA38-BC *	PA38-EN	PA38-SS
	3/8" x 3/4"	PA3	PA3-B	PA3-BC *	PA3-EN	PA3-SS

SOCKET CONSTRUCTION

Standard
Steel Sleeve
Brass Barrel
Brass Adapter
440 Stainless Balls
302 Stainless Springs
Steel Valve
Buna Rubber Washer

Brass
Brass Sleeve
Brass Barrel
Brass Adapter
302 Stainless Balls
302 Stainless Springs
Brass Valve
Buna Rubber Washer

Brass Chrome Plated
Brass Chrome Sleeve
Brass Chrome Barrel
Brass Chrome Adapter
302 Stainless Balls
302 Stainless Springs
Brass Valve
Buna Rubber Washer

Electroless Nickel Plated
Electroless Nickel Brass Slv
Electroless Nickel Brass Barrel
Electroless Nickel Brass Adapter
302 Stainless Balls
302 Stainless Springs
303 Stainless Valve
Buna Rubber Washer

Stainless
303 Stainless Sleeve
303 Stainless Barrel
303 Stainless Adapter
302 Stainless Balls
302 Stainless Springs
303 Stainless Valve
Buna Rubber Washer

Automatic Q Series
Brass Sleeve
Brass Barrel
Brass Adapter
416 Stainless Pins
302 Stainless Springs
Steel Valve
Buna Rubber Washer

Safety Exhaust
Steel Sleeve
Steel Barrel
Steel Adapter
Chrome Steel Balls
Steel Pins
302 Stainless Springs
Steel Valve
Buna Rubber Washer

Sleeve Guard
Brass Sleeve
Brass Barrel
Brass Adapter
Chrome Steel Balls
Steel Springs
Steel Valve
Buna Rubber Washer

Plug Construction Standard:

Heat Treated Steel
Corrosion Resistant
Plating

Brass:
All Solid Brass
Construction

Brass Chrome:
Nickel Chrome Plated
Brass

Electroless Nickel Plate:
Electroless Nickel
Plated Brass

Stainless:
Type 303 Stainless Steel





Series B

Industrial Interchange - One Way

3/8" Body Size
Maximum 300 PSI

Sockets (Valved)

FNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	1/4"	FB2	FB2-B	FB2-BC *	FB2-EN	FB2-SS	FB2-Q	N/A	N/A
	3/8"	FB3	FB3-B	FB3-BC *	FB3-EN	FB3-SS	FB3-Q	SVFB3	FB3-SG
	1/2"	FB4	FB4-B	FB4-BC *	FB4-EN	FB4-SS	FB4-Q	SVFB4	FB4-SG
MNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	1/4"	MB2	MB2-B	MB2-BC *	MB2-EN	MB2-SS	MB2-Q	N/A	N/A
	3/8"	MB3	MB3-B	MB3-BC *	MB3-EN	MB3-SS	MB3-Q	SVMB3	MB3-SG
	1/2"	MB4	MB4-B	MB4-BC *	MB4-EN	MB4-SS	MB4-Q	SVMB4	MB4-SG
HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	1/4"	SB2	SB2-B	SB2-BC *	SB2-EN	SB2-SS	SB2-Q	SVSB2	SB2-SG
	5/16"	SB25	SB25-B	SB25-BC *	SB25-EN	SB25-SS	SB25-Q	SVSB25	SB25-SG
	3/8"	SB3	SB3-B	SB3-BC *	SB3-EN	SB3-SS	SB3-Q	SVSB3	SB3-SG
	1/2"	SB4	SB4-B	SB4-BC *	SB4-EN	SB4-SS	SB4-Q	SVSB4	SB4-SG
PL HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	3/8"	SB3-PL	SB3-B-PL	N/A	N/A	N/A	SB3-Q-PL	N/A	SB3-SG-PL
	1/2"	SB4-PL	SB4-B-PL	N/A	N/A	N/A	SB4-Q-PL	N/A	SB4-SG-PL
REUSABLE	Reusable Hose End	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	3/8" x 5/8"	RKB37	RKB37-B	RKB37-BC *	RKB37-EN	RKB37-SS	RKB37-Q	N/A	N/A
	3/8" x 11/16"	RKB38	RKB38-B	RKB38-BC *	RKB38-EN	RKB38-SS	RKB38-Q	N/A	N/A
	3/8" x 3/4"	RKB3	RKB3-B	RKB3-BC *	RKB3-EN	RKB3-SS	RKB3-Q	N/A	N/A

SOCKET CONSTRUCTION

Standard
Steel Sleeve
Brass Barrel
Brass Adapter
440 Stainless Balls
302 Stainless Springs
Steel Valve
Buna Rubber Washer

Brass
Brass Sleeve
Brass Barrel
Brass Adapter
302 Stainless Balls
302 Stainless Springs
Brass Valve
Buna Rubber Washer

Brass Chrome Plated
Brass Chrome Sleeve
Brass Chrome Barrel
Brass Chrome Adapter
302 Stainless Balls
302 Stainless Springs
Brass Valve
Buna Rubber Washer

Electrls Nickel Plated
Electrls Nickel Brass Slv
Electrls Nickel Brass Barrel
Electrls Nickel Brass Adapter
302 Stainless Balls
302 Stainless Springs
303 Stainless Valve
Buna Rubber Washer

Plugs (Unvalved)

FNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	1/4"	FPB2	N/A	N/A	N/A	FPB2-SS
	3/8"	FPB3	N/A	N/A	N/A	FPB3-SS
	1/2"	FPB4	N/A	N/A	N/A	FPB4-SS
MNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	1/8"	MPB1	N/A	N/A	N/A	MPB1-SS
	1/4"	MPB2	N/A	N/A	N/A	MPB2-SS
	3/8"	MPB3	MPB3-B	MPB3-BC *	MPB3-EN	MPB3-SS
	1/2"	MPB4	N/A	N/A	N/A	MPB4-SS
HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	1/4"	SPB2	N/A	N/A	N/A	SPB2-SS
	5/16"	SPB25	N/A	N/A	N/A	N/A
	3/8"	SPB3	N/A	N/A	SPB3-EN	SPB3-SS
	1/2"	SPB4	N/A	N/A	N/A	SPB4-SS
PL HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	1/4"	SPB2-PL	N/A	N/A	N/A	N/A
	5/16"	N/A	N/A	N/A	N/A	N/A
	3/8"	SPB3-PL	N/A	N/A	N/A	N/A
REUSABLE	Reusable Hose End	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	3/8" x 5/8"	PB37	N/A	N/A	N/A	PB37-SS
	3/8" x 11/16"	PB38	N/A	N/A	N/A	PB38-SS
	3/8" x 3/4"	PB3	N/A	N/A	N/A	PB3-SS

Plug Construction

Standard:
Heat Treated Steel
Corrosion Resistant Plating

Brass:
All Solid Brass Construction

Brass Chrome:
Nickel Chrome Plated Brass

Electroless Nickel Plate:
Electroless Nickel
Plated Brass

Stainless:
Type 303 Stainless Steel

Stainless
303 Stainless Sleeve
303 Stainless Barrel
303 Stainless Adapter
302 Stainless Balls
302 Stainless Springs
303 Stainless Valve
Buna Rubber Washer

Automatic Q Series
Brass Sleeve
Brass Barrel
Brass Adapter
416 Stainless Pins
302 Stainless Springs
Steel Valve
Buna Rubber Washer

Safety Exhaust
Steel Sleeve
Steel Barrel
Steel Adapter
Chrome Steel Balls
Steel Pins
302 Stainless Springs
Steel Valve
Buna Rubber Washer

Sleeve Guard
Brass Sleeve
Brass Barrel
Brass Adapter
Chrome Steel Balls
Steel Springs
Steel Valve
Buna Rubber Washer





Sockets (Valved)

FNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	3/8"	FC3	FC3-B	FC3-BC *	FC3-EN	FC3-SS	FC3-Q	N/A	N/A
1/2"	FC4	FC4-B	FC4-BC *	FC4-EN	FC4-SS	FC4-Q	SVFC4	FC4-SG	
3/4"	FC5	FC5-B	FC5-BC *	N/A	N/A	FC5-Q	SVFC5	N/A	

MNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	3/8"	MC3	MC3-B	MC3-BC *	MC3-EN	MC3-SS	MC3-Q	N/A	N/A
1/2"	MC4	MC4-B	MC4-BC *	MC4-EN	MC4-SS	MC4-Q	SVMC4	MC4-SG	
3/4"	MC5	MC5-B	MC5-BC *	MC5-EN	MC5-SS	MC5-Q	SVMC5	N/A	

HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	3/8"	SC3	SC3-B	SC3-BC *	SC3-EN	SC3-SS	SC3-Q	SVSC3	SC3-SG
1/2"	SC4	SC4-B	SC4-BC *	SC4-EN	SC4-SS	SC4-Q	SVSC4	SC4-SG	
3/4"	SC5	SC5-B	SC5-BC *	SC5-EN	SC5-SS	SC5-Q	SVSC5	SC5-SG	

PL HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	3/8"	SC3-PL	N/A	N/A	N/A	N/A	SC3-PL-Q	N/A	N/A
1/2"	SC4-PL	N/A	N/A	N/A	N/A	SC4-PL-Q	N/A	N/A	
3/4"	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	

REUSABLE	Reusable Hose End	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel	Automatic Q Series	Safety Exhaust	Sleeve Guard
	1/2" x 13/16"	RKC43	RKC43-B	RKC43-BC *	RKC43-EN	RKC43-SS	RKC43-Q	N/A	N/A
1/2" x 7/8"	RKC45	RKC45-B	RKC45-BC *	RKC45-EN	RKC45-SS	RKC45-Q	N/A	N/A	
1/2" x 15/16"	RKC47	RKC47-B	RKC47-BC *	RKC47-EN	RKC47-SS	RKC47-Q	N/A	N/A	

SOCKET CONSTRUCTION

Standard
Steel Sleeve
Brass Barrel
Brass Adapter
440 Stainless Balls
302 Stainless Springs
Steel Valve
Buna Rubber Washer

Brass
Brass Sleeve
Brass Barrel
Brass Adapter
302 Stainless Balls
302 Stainless Springs
Brass Valve
Buna Rubber Washer

Brass Chrome Plated
Brass Chrome Sleeve
Brass Chrome Barrel
Brass Chrome Adapter
302 Stainless Balls
302 Stainless Springs
Brass Valve
Buna Rubber Washer

Electroless Nickel Plated
Electroless Nickel Brass Sleeve
Electroless Nickel Brass Barrel
Electroless Nickel Brass Adapter
302 Stainless Balls
302 Stainless Springs
303 Stainless Valve
Buna Rubber Washer

Stainless
303 Stainless Sleeve
303 Stainless Barrel
303 Stainless Adapter
302 Stainless Balls
302 Stainless Springs
303 Stainless Valve
Buna Rubber Washer

Automatic Q Series
Brass Sleeve
Brass Barrel
Brass Adapter
416 Stainless Pins
302 Stainless Springs
Steel Valve
Buna Rubber Washer

Safety Exhaust
Steel Sleeve
Steel Barrel
Steel Adapter
Chrome Steel Balls
Steel Pins
302 Stainless Springs
Steel Valve
Buna Rubber Washer

Sleeve Guard
Brass Sleeve
Brass Barrel
Brass Adapter
Chrome Steel Balls
Steel Springs
Steel Valve
Buna Rubber Washer

Plugs (Unvalved)

FNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	3/8"	FPC3	N/A	N/A	N/A	N/A
1/2"	FPC4	N/A	N/A	N/A	N/A	FPC4-SS
3/4"	FPC5	N/A	N/A	N/A	N/A	N/A

MNPT	Thread	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	1/4"	MPC2	N/A	N/A	N/A	N/A
3/8"	MPC3	N/A	N/A	N/A	N/A	MPC3-SS
1/2"	MPC4	MPC4-B	MPC4-BC *	MPC4-EN	MPC4-SS	MPC4-SS
3/4"	MPC5	N/A	N/A	N/A	N/A	MPC5-SS

HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	3/8"	SPC3	N/A	N/A	N/A	N/A
1/2"	SPC4	N/A	N/A	N/A	N/A	SPC4-SS
3/4"	SPC5	N/A	N/A	N/A	N/A	SPC5-SS

PL HOSE BARB	Hose I.D.	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	3/8"	SPC3-PL	N/A	N/A	N/A	N/A
1/2"	SPC4-PL	N/A	N/A	N/A	N/A	N/A
3/4"	N/A	N/A	N/A	N/A	N/A	N/A

REUSABLE	Reusable Hose End	Standard	Brass	Brass Chrome	Electroless Nickel	Stainless Steel
	1/2" x 13/16"	PC43	N/A	N/A	N/A	N/A
1/2" x 7/8"	PC45	N/A	N/A	N/A	N/A	PC45-SS
1/2" x 15/16"	PC47	N/A	N/A	N/A	N/A	PC47-SS

Plug Construction Standard:

Heat Treated Steel
Corrosion Resistant
Plating

Brass:
All Solid Brass
Construction

Brass Chrome:
Nickel Chrome Plated
Brass

Electroless Nickel Plate:
Electroless Nickel
Plated Brass

Stainless:
Type 303 Stainless Steel





Series D

Industrial Interchange - One Way

3/4" Body Size
Maximum 300 PSI

Sockets (Valved)

FPT	Thread	Automatic Q Series	Safety Exhaust
	1/2"	FD4-Q	N/A
	3/4"	FD5-Q	SVFD5
	1"	FD6-Q	SVFD6

MPT	Thread	Automatic Q Series	Safety Exhaust
	1/2"	MD4-Q	N/A
	3/4"	MD5-Q	SVMD5
	1"	MD6-Q	SVMD6

HOSE BARB	Hose I.D.	Automatic Q Series	Safety Exhaust
	1/2"	SD4-Q	N/A
	3/4"	SD5-Q	SVSD5
	1"	SD6-Q	N/A

Plugs (Unvalved)

FPT	Thread	Standard
	1/2"	FPD4
	3/4"	FPD5
	1"	FPD6

MPT	Thread	Standard
	1/2"	MPD4
	3/4"	MPD5
	1"	MPD6

HOSE BARB	Hose I.D.	Standard
	1/2"	SPD4
	3/4"	SPD5
	1"	SPD6

SOCKET CONSTRUCTION

Automatic Q Series
Brass Sleeve
Brass Barrel
Brass Adapter
416 Stainless Pins
302 Stainless Springs
Steel Valve
Buna Rubber Washer

Safety Exhaust

Steel Sleeve
Steel Barrel
Steel Adapter
Chrome Steel Balls
Steel Pins
302 Stainless Springs
Steel Valve
Buna Rubber Washer

PLUG CONSTRUCTION

Standard

Steel
Zinc Plated

Performance Flow Data

	AIR FLOW - CFM				WATER FLOW	
	100 PSIG		80 PSIG		GPM - 60 PSIG	
	Pressure Drop					
	10 PSIG	5 PSIG	10 PSIG	5 PSIG	10 PSIG	5 PSIG
Series A	36	26	33	24	3.7	2.5
Series B	68	50	62	45	6.8	5
Series C	118	90	107	82	11	8
Series D	190	135	172	122	22	16

Series A B C D, Repair Parts and Options

Socket Option Suffixes:

- V (Viton)
- EP (Ethylene Propylene)
- ST (Straight Thru)
- SL (Sleeve Lock)

Repair Parts:

	SERIES A	SERIES B	SERIES C	SERIES D
	WA-BN WA-V WA-EP	WB-BN WB-V WB-EP	WC-BN WC-V WC-EP	WD-BN WD-V WD-EP
	A Valve Spring	B Valve Spring	C Valve Spring	D Valve Spring
	VA-S VA-BR VA-SS	VB-S VB-SS	VC-S VC-SS	VD-S VD-SS

Series 210/310

1/4" Body Size
3/8" Body Size



210 Sockets (Valved)

FNPT	Thread	Standard	Stainless Steel
	1/8"	210-FA1	210-FA1-SS
	1/4"	210-FA2	210-FA2-SS
	3/8"	210-FA3	210-FA3-SS

MNPT	Thread	Standard	Stainless Steel
	1/8"	210-MA1	210-MA1-SS
	1/4"	210-MA2	210-MA2-SS
	3/8"	210-MA3	210-MA3-SS

HOSE BARB	Hose I.D.	Standard	Stainless Steel
	1/4"	210-SA2	210-SA2-SS
	5/16"	210-SA25	N/A
	3/8"	210-SA3	210-SA3-SS

PL HOSE BARB	Hose I.D.	Standard	Stainless Steel
	1/4"	210-SA2-PL	210-SA2-PL-SS
	5/16"	N/A	N/A
	3/8"	210-SA3-PL	210-SA3-PL-SS

REUSABLE	I.D. x O.D.	Standard	Stainless Steel
	3/16" x 3/8"	210-RKA1	N/A
	1/4" x 1/2"	210-RKA2	N/A
	1/4" x 9/16"	210-RKA15	N/A
	1/4" x 5/8"	210-RKA27	N/A
	5/16" x 5/8"	210-RKA25	N/A
	3/8" x 5/8"	210-RKA37	N/A
	3/8" x 11/16"	210-RKA38	N/A
	3/8" x 3/4"	210-RKA3	N/A

310 Sockets (Valved)

FNPT	Thread	Standard
	1/4"	310-FB2
	3/8"	310-FB3
	1/2"	310-FB4

MNPT	Thread	Standard
	1/4"	310-MB2
	3/8"	310-MB3
	1/2"	310-MB4

HOSE BARB	Hose I.D.	Standard
	1/4"	310-SB2
	5/16"	310-SB25
	3/8"	310-SB3
	1/2"	310-SB4

PL HOSE BARB	Hose I.D.	Standard
	1/4"	N/A
	3/8"	310-SB3-PL
	1/2"	310-SB4-PL

REUSABLE	I.D. x O.D.	Standard
	1/4" x 1/2"	310-RKB2
	1/4" x 9/16"	310-RKB15
	1/4" x 5/8"	310-RKB27
	3/8" x 5/8"	310-RKB37
	3/8" x 11/16"	310-RKB38
	3/8" x 3/4"	310-RKB3

210 Plugs (Unvalved)

FNPT	Thread	Standard	Stainless Steel
	1/8"	210-FPA1	N/A
	1/4"	210-FPA2	210-FPA2-SS
	3/8"	210-FPA3	N/A

MNPT	Thread	Standard	Stainless Steel
	1/8"	210-MPA1	N/A
	1/4"	210-MPA2	210-MPA2-SS
	3/8"	210-MPA3	N/A

HOSE BARB	Hose I.D.	Standard	Stainless Steel
	1/4"	210-SPA2	N/A
	5/16"	210-SPA25	N/A
	3/8"	210-SPA3	N/A

PL HOSE BARB	Hose I.D.	Standard	Stainless Steel
	1/4"	210-SPA2-PL	N/A

310 Plugs (Unvalved)

FNPT	Thread	Standard
	1/4"	N/A
	3/8"	310-FPB3
	1/2"	N/A

MNPT	Thread	Standard
	1/4"	N/A
	3/8"	310-MPB3
	1/2"	N/A

HOSE BARB	Hose I.D.	Standard
	1/4"	N/A
	3/8"	310-SPB3
	1/2"	310-SPB4

*Interchanges With
ARO 210 & 310*

Socket:
Automatic
One Hand Connect

Seal Material:
Steel: Buna
Stainless: Buna

Valve Material:
Standard: Plated Steel
Stainless: 303SS

Socket Material:
Brass & Plated Steel
303SS On Stainless
Version

Plug Material:
Standard: Plated Steel
Stainless: 303SS

Series L (Lincoln)

1/4" Body Size



Lincoln Sockets (Valved)

FNPT	Thread	Standard	Stainless Steel
	1/4"	LFA2	N/A

MNPT	Thread	Standard	Stainless Steel
	1/4"	LMA2	N/A

Lincoln Plugs (Unvalved)

FNPT	Thread	Standard	Stainless Steel
	1/4"	LFPA2	LFPA2-SS

MNPT	Thread	Standard	Stainless Steel
	1/8"	LMPA1	N/A
	1/4"	LMPA2	LMPA2-SS

Manual Style Socket

Socket:
Seal Material: Buna
Body Material: Brass

Plug:
Standard: Plated Steel
Stainless: 303SS





Series RL (Ring Lock)


3/8" & 1/2" Body Size
Maximum 300 PSI


Interchanges with Hansen 2RL & 3RL

3/8" Body Size Sockets (Valved)


FNPT	Thread	Standard
	1/4"	RLFB2
	3/8"	RLFB3
	1/2"	RLFB4


MNPT	Thread	Standard
	1/4"	RLMB2
	3/8"	RLMB3
	1/2"	RLMB4


HOSE BARB	Hose I.D.	Standard
	1/4"	RLSB2
	5/16"	RLSB25
	3/8"	RLSB3
	1/2"	RLSB4

PL HOSE BARB	Hose I.D.	Standard
	3/8"	RLSB3-PL
	1/2"	RLSB4-PL

1/2" Body Size Sockets (Valved)


FNPT	Thread	Standard
	1/4"	RLFC2
	3/8"	RLFC3
	1/2"	RLFC4
	3/4"	RLFC5


MNPT	Thread	Standard
	1/4"	RLMC2
	3/8"	RLMC3
	1/2"	RLMC4
	3/4"	RLMC5


HOSE BARB	Hose I.D.	Standard
	1/4"	RLSC2
	3/8"	RLSC25
	1/2"	RLSC3
	3/4"	RLSC4

PL HOSE BARB	Hose I.D.	Standard
	1/2"	RLSC4-PL

Plugs (Unvalved)


FNPT	Thread	Standard
	1/4"	RLFPB2
	3/8"	RLFPB3
	1/2"	RLFPB4


MNPT	Thread	Standard
	1/8"	RLMPB1
	1/4"	RLMPB2
	3/8"	RLMPB3
	1/2"	RLMPB4

HOSE BARB	Hose I.D.	Standard
	1/4"	RLSPB2
	3/8"	RLSPB3
	1/2"	RLSPB4

Plugs (Unvalved)

FNPT	Thread	Standard
	1/4"	RLFPC2
	1/2"	RLFPC4

MNPT	Thread	Standard
	1/4"	RLMPC2
	3/8"	RLMPC3
	1/2"	RLMPC4
	3/4"	RLMPC5

HOSE BARB	Hose I.D.	Standard
	1/4"	RLSPC2
	3/8"	RLSPC3
	1/2"	RLSPC4
	3/4"	RLSPC5

SOCKET CONSTRUCTION

Brass
Steel Zinc Plated

Pressure: 300 PSI
Seals: Buna

PLUG CONSTRUCTION

Steel
Zinc Plated

Pressure: 300 PSI
Seals: Buna

Series TL (Twist Lock)

1/4" & 1/2" Body Size
Maximum 300 PSI



Interchanges with Schraeder
Standard & Heavy Duty

1/4" Body Size Sockets (Valved)

FNPT	Thread	Standard	Stainless
	1/8"	TLFA1	TLFA1-SS
	1/4"	TLFA2	TLFA2-SS
	3/8"	TLFA3	TLFA3-SS

MNPT	Thread	Standard	Stainless
	1/8"	TLMA1	TLMA1-SS
	1/4"	TLMA2	TLMA2-SS
	3/8"	TLMA3	TLMA3-SS

HOSE BARB	Hose I.D.	Standard	Stainless
	1/4"	TLSA2	TLSA2-SS
	5/16"	TLSA25	N/A
	3/8"	TLSA3	TLSA3-SS

PL HOSE BARB	Hose I.D.	Standard	Stainless
	1/4"	TLSA2-PL	N/A
	3/8"	TLSA3-PL	N/A

Plugs (Unvalved)

FNPT	Thread	Standard	Stainless
	1/8"	TLFPA1	N/A
	1/4"	TLFPA2	TLFPA2-SS

MNPT	Thread	Standard	Stainless
	1/8"	TLMPA1	N/A
	1/4"	TLMPA2	TLMPA2-SS

HOSE BARB	Hose I.D.	Standard	Stainless
	1/4"	TLSPA2	N/A
	3/8"	TLSPA3	N/A

PL HOSE BARB	Hose I.D.	Standard	Stainless
	1/4"	TLSPA2-PL	N/A

1/2" Body Size Sockets (Valved)

FNPT	Thread	Standard
	1/4"	TLFC2
	3/8"	TLFC3
	1/2"	TLFC4
	3/4"	TLFC5

MNPT	Thread	Standard
	1/4"	TLMC2
	3/8"	TLMC3
	1/2"	TLMC4
	3/4"	TLMC5

HOSE BARB	Hose I.D.	Standard
	1/4"	TLSC2
	3/8"	TLSC3
	1/2"	TLSC4
	3/4"	TLSC5

PL HOSE BARB	Hose I.D.	Standard
	1/2"	TLSC4-PL

Plugs (Unvalved)

FNPT	Thread	Standard
	3/8"	TLFPC3

MNPT	Thread	Standard
	1/4"	TLMPC2
	3/8"	TLMPC3
	1/2"	TLMPC4

HOSE BARB	Hose I.D.	Standard
	3/8"	TLSPC3
	1/2"	TLSPC4

SOCKET CONSTRUCTION

Standard
Steel
Zinc Plated

Stainless
303 Stainless Steel

PLUG CONSTRUCTION

Standard
Steel
Zinc Plated

Stainless
303 Stainless Steel



Series T (Truflate)

1/4" & 3/8" Body Size
Maximum 300 PSI

Automotive Interchange 1/4" Body Size Sockets (Valved)

FNPT	Thread	Standard	Brass
	1/8"	TFA1	TFA1-B
	1/4"	TFA2	TFA2-B
	3/8"	TFA3	TFA3-B

MNPT	Thread	Standard	Brass
	1/8"	TMA1	TMA1-B
	1/4"	TMA2	TMA2-B
	3/8"	TMA3	TMA3-B

STANDARD HOSE BARB	Hose I.D.	Standard	Brass
	1/4"	TSA2	TSA2-B
	5/16"	TSA25	TSA25-B
	3/8"	TSA3	TSA3-B

PL HOSE BARB	Hose I.D.	Standard	Brass
	1/4"	TSA2-PL	TSA2-B-PL
	3/8"	TSA3-PL	TSA3-B-PL

Automotive Interchange 3/8" Body Size Sockets (Valved)

FNPT	Thread	Standard
	3/8"	TFB3

MNPT	Thread	Standard
	3/8"	TMB3

STANDARD HOSE BARB	Hose I.D.	Standard
	3/8"	TSB3
	1/2"	TSB4

PL HOSE BARB	Hose I.D.	Standard
	3/8"	TSB3-PL

SOCKET CONSTRUCTION

Standard 1/4" Sockets
Brass Body
Steel Balls
Steel Springs
Steel Valve
Buna Seals

Brass 1/4" Sockets
Brass Body
302SS Balls
302SS Springs
Brass Valve
Buna Seals

Steel Zinc Plated 3/8" Sockets
Steel Body
Steel Balls
Steel Springs
Steel Valve
Buna Seals

Plugs (Unvalved)

FNPT	Thread	Standard
	1/8"	TFPA1
	1/4"	TFPA2
	3/8"	TFPA3

MNPT	Thread	Standard	Brass	Stainless
	1/8"	TMPA1	N/A	N/A
	1/4"	TMPA2	TMPA2-B	TMPA2-SS
	3/8"	TMPA3	N/A	N/A

HOSE BARB	Hose I.D.	Standard
	1/4"	TSPA2
	3/8"	TSPA3

PL HOSE BARB	Hose I.D.	Standard
	1/4"	TSPA2-PL
	3/8"	TSPA3-PL

Plugs (Unvalved)

FNPT	Thread	Standard
	1/4"	TFPB2
	3/8"	TFPB3

MNPT	Thread	Standard
	1/4"	TMPB2
	3/8"	TMPB3

HOSE BARB	Thread	Standard
	3/8"	TSPB3

PUSH LOCK	Thread	Standard
	3/8"	TSPB3-PL

PLUG CONSTRUCTION


Steel
Zinc Plated

Seal Suffix Adders
-VT (Viton)
-EP (Ethylene Propylene)



Double Shutoff ISO "A" 7241/01 Series "A" - Full Interchange

Sockets



Part #	Body Size	FNPT Thread Size	Connected Max. Operating Pressure		Pressure Drop at Rated Flow		Rated Flow Max.		Dust Plugs
			PSI	Bar	PSI	Bar	Gal./Min.	L/Min.	
2GS	1/4"	1/4"	5075	350	79.75	5.5	3.17	12	G2DPM
3GS	3/8"	3/8"	4350	300	14.5	1	6.07	23	G3DPM
4GS	1/2"	1/2"	3625	250	17.4	1.2	11.89	45	G4DPM
6GS	3/4"	3/4"	3625	250	13.05	0.9	19.55	74	G6DPM
8GS	1"	1"	3335	230	10.88	0.75	26.42	100	G8DPM
10GS	1 1/4"	1 1/4"	3335	230	9.425	0.65	48.93	189	N/A
12GS	1 1/2"	1 1/2"	2610	180	10.15	0.7	76.08	288	N/A
20GS	2"	2"	1885	130	7.25	0.5	100.13	379	N/A

Specs

Socket Body: Steel
 Socket Sleeve: Steel
 Plug Body: Induction Hardened Steel
 Valves: Hardened Steel
 Back Up Ring: Teflon
 Seals: Buna-N

Socket & Plug Option Suffix Adders


-VT (Viton)
 -EP (Ethylene Propylene)

Dust Plugs and Dust Caps Specs

Red in color, made of PVC rubber blend.

These prevent dust, water and mud from entering the coupler or plug and preventing clogging and corrosion. Essentially extending the life of the quick disconnect coupling.

Plugs



Part #	Body Size	FNPT Thread Size	Connected Max. Operating Pressure		Pressure Drop at Rated Flow		Rated Flow Max.		Dust Caps
			PSI	Bar	PSI	Bar	Gal./Min.	L/Min.	
2GP	1/4"	1/4"	5075	350	79.75	5.5	3.17	12	G2DCM
3GP	3/8"	3/8"	4350	300	14.5	1	6.07	23	G3DCM
4GP	1/2"	1/2"	3625	250	17.4	1.2	11.89	45	G4DCM
6GP	3/4"	3/4"	3625	250	13.05	0.9	19.55	74	G6DCM
8GP	1"	1"	3335	230	10.88	0.75	26.42	100	G8DCM
10GP	1 1/4"	1 1/4"	3335	230	9.425	0.65	48.93	189	N/A
12GP	1 1/2"	1 1/2"	2610	180	10.15	0.7	76.08	288	N/A
20GP	2"	2"	1885	130	7.25	0.5	100.13	379	N/A




Series H

1/8" - 1 1/2" Body Size


Double Shutoff ISO "B" 7241/01 Series "B" - Full Interchange

Sockets



Part #	Material	Body Size	FNPT Thread Size	Connected Max. Operating Pressure		Air Flow @ 100 PSI 10 PSI Pressure Drop		Rated Flow Max.		Dust Plugs
				PSI	Bar	CFM	CMM	Gal./Min.	L/Min.	
1HS	Steel	1/8"	1/8"	4000	275	22	0.622	1.8	6.8	1DPM
1HSB	Brass	1/8"	1/8"	3000	206	22	0.622	1.8	6.8	1DPM
1HS-SS	303SS	1/8"	1/8"	3500	241	22	0.622	1.8	6.8	1DPM
2HS	Steel	1/4"	1/4"	4000	350	32	0.906	3.6	13.6	2DPM
2HSB	Brass	1/4"	1/4"	2700	186	32	0.906	3.6	13.6	2DPM
2HS-SS	303SS	1/4"	1/4"	3700	255	32	0.906	3.6	13.6	2DPM
3HS	Steel	3/8"	3/8"	3500	300	58	1.64	6.7	25.3	3DPM
3HSB	Brass	3/8"	3/8"	2200	151	58	1.64	6.7	25.3	3DPM
3HS-SS	303SS	3/8"	3/8"	3700	255	58	1.64	6.7	25.3	3DPM
4HS	Steel	1/2"	1/2"	2500	250	130	3.68	11	41.6	4DPM
4HSB	Brass	1/2"	1/2"	2200	151	130	3.68	11	41.6	4DPM
4HS-SS	303SS	1/2"	1/2"	4200	290	130	3.68	11	41.6	4DPM
6HS	Steel	3/4"	3/4"	1600	250	305	8.63	26.3	99.55	6DPM
6HSB	Brass	3/4"	3/4"	1500	103	305	8.63	26.3	99.55	6DPM
6HS-SS	303SS	3/4"	3/4"	1600	110	305	8.63	26.3	99.55	6DPM
8HS	Steel	1"	1"	2000	230	372	10.53	31.8	120.37	8DPM
8HSB	Brass	1"	1"	1500	103	372	10.53	31.8	120.37	8DPM
8HS-SS	303SS	1"	1"	2000	230	372	10.53	31.8	120.37	8DPM
10HS	Steel	1 1/4"	1 1/4"	1500	103	N/A	N/A	107	404	N/A
10HSB	Brass	1 1/4"	1 1/4"	1000	69	N/A	N/A	107	404	N/A
10HS-SS	303SS	1 1/4"	1 1/4"	1000	69	N/A	N/A	107	404	N/A
12HS	Steel	1 1/2"	1 1/2"	1800	124	N/A	N/A	125	473	N/A
12HSB	Brass	1 1/2"	1 1/2"	1000	69	N/A	N/A	125	473	N/A
12HS-SS	303SS	1 1/2"	1 1/2"	1000	69	N/A	N/A	125	473	N/A

Plugs



Part #	Material	Body Size	FNPT Thread Size	Connected Max. Operating Pressure		Air Flow @ 100 PSI 10 PSI Pressure Drop		Rated Flow Max.		Dust Caps
				PSI	Bar	CFM	CMM	Gal./Min.	L/Min.	
1HP	Steel	1/8"	1/8"	4000	275	22	0.622	1.8	6.8	1DCM
1HPB	Brass	1/8"	1/8"	3000	206	22	0.622	1.8	6.8	1DCM
1HP-SS	303SS	1/8"	1/8"	3500	241	22	0.622	1.8	6.8	1DCM
2HP	Steel	1/4"	1/4"	4000	350	32	0.906	3.6	13.6	2DCM
2HPB	Brass	1/4"	1/4"	2700	186	32	0.906	3.6	13.6	2DCM
2HP-SS	303SS	1/4"	1/4"	3700	255	32	0.906	3.6	13.6	2DCM
3HP	Steel	3/8"	3/8"	3500	300	58	1.64	6.7	25.3	3DCM
3HPB	Brass	3/8"	3/8"	2200	151	58	1.64	6.7	25.3	3DCM
3HP-SS	303SS	3/8"	3/8"	3700	255	58	1.64	6.7	25.3	3DCM
4HP	Steel	1/2"	1/2"	2500	250	130	3.68	11	41.6	4DCM
4HPB	Brass	1/2"	1/2"	2200	151	130	3.68	11	41.6	4DCM
4HP-SS	303SS	1/2"	1/2"	4200	290	130	3.68	11	41.6	4DCM
6HP	Steel	3/4"	3/4"	1600	250	305	8.63	26.3	99.55	6DCM
6HPB	Brass	3/4"	3/4"	1500	103	305	8.63	26.3	99.55	6DCM
6HP-SS	303SS	3/4"	3/4"	1600	110	305	8.63	26.3	99.55	6DCM
8HP	Steel	1"	1"	2000	230	372	10.53	31.8	120.37	8DCM
8HPB	Brass	1"	1"	1500	103	372	10.53	31.8	120.37	8DCM
8HP-SS	303SS	1"	1"	2000	230	372	10.53	31.8	120.37	8DCM
10HP	Steel	1 1/4"	1 1/4"	1500	103	N/A	N/A	107	404	N/A
10HPB	Brass	1 1/4"	1 1/4"	1000	69	N/A	N/A	107	404	N/A
10HP-SS	303SS	1 1/4"	1 1/4"	1000	69	N/A	N/A	107	404	N/A
12HP	Steel	1 1/2"	1 1/2"	1800	124	N/A	N/A	125	473	N/A
12HPB	Brass	1 1/2"	1 1/2"	1000	69	N/A	N/A	125	473	N/A
12HP-SS	303SS	1 1/2"	1 1/2"	1000	69	N/A	N/A	125	473	N/A

Specs Steel

Socket Body: Steel
Socket Sleeve: Steel
Plug Body: Hardened Steel
Valves: Hardened Steel
Back Up Ring: Teflon
Seals: Buna-N

Specs Brass

Socket Body: Brass
Socket Sleeve: Brass
Plug Body: Brass
Valves: Brass
Seals: Buna-N

Specs Stainless

Socket Body: 303SS
Socket Sleeve: 303SS
Plug Body: 303SS
Valves: 303SS
Seals: Buna-N

Use Suffixes Below For Other Seals

- VT (Viton)
- EP (Ethylene Propylene)
- NE (Neoprene)
- SI (Silicone)

Material Types

- Steel
- B (Brass)
- SS (303 Stainless Steel)

Options

One Way Shut-off Use
Suffix - **VA** After Part#
Straight Thru Use
Suffix - **ST** After Part#
Sleeve Lock Use
Suffix - **SL** After Part#

Dust Plugs and Dust Caps Specs

Red in color, made of PVC rubber blend.
These prevent dust, water and mud from entering the coupler or plug and preventing clogging and corrosion. Essentially extending the life of the quick disconnect coupling.

Series HH & HI



SnapTite H & IH Interchange

Two Way Valved Sockets

FNPT	Thread	Steel	Brass
	1/4"	HHS2F2	HHS2F2B
	3/8"	HHS3F3	HHS3F3B
	1/2"	HHS4F4	HHS4F4B

MNPT	Thread	Steel	Brass
	1/4"	HHS2M2	HHS2M2B
	3/8"	HHS3M3	HHS3M3B
	1/2"	HHS4M4	HHS4M4B

Two Way Valved Plugs

FNPT	Thread	Steel	Brass
	1/4"	HHP2F2	HHP2F2B
	3/8"	HHP3F3	HHP3F3B
	1/2"	HHP4F4	HHP4F4B

MNPT	Thread	Steel	Brass
	1/4"	HHP2M2	HHP2M2B
	3/8"	HHP3M3	HHP3M3B
	1/2"	HHP4M4	HHP4M4B

One Way Sockets

FNPT	Thread	Socket Steel
	1/8"	N/A
	1/4"	HIS2F2
	3/8"	HIS3F3
	1/2"	HIS4F4

MNPT	Thread	Socket Steel
	1/4"	HIS2M2
	3/8"	HIS3M3
	1/2"	HIS4M4

Straight Thru Plugs

Unvalved Plug Steel	Brass
HH21F	N/A
HH22F	HH22FB
HH33F	HH33FB
HH44F	HH44FB

Unvalved Plug Steel	Brass
HH22M	HH22MB
HH33M	HH33MB
HH44M	HH44MB

Straight Thru Sockets

Unvalved Socket Steel	Brass
N/A	N/A
HHS2	HHS2B
HHS3	HHS3B
HHS4	HHS4B

Unvalved Socket Steel	Brass
N/A	N/A
N/A	N/A
N/A	N/A

Working Pressure

HH Two Way

Body Size	Steel PSIG	Brass PSIG
1/4"	3250	2000
3/8"	2250	1200
1/2"	1800	1200

HH Straight Thru

Body Size	Steel PSIG	Brass PSIG
1/4"	3000	3000
3/8"	4000	3500
1/2"	4000	2500

HI One Way

Body Size	Steel PSIG
1/4"	3000
3/8"	2250
1/2"	2000

HH and HH Coupler Info Specs

Standard Seals: Buna-N

Type:

HH - Two way shut-off and straight-thru

HI - One way shut-off

Suffix Adders

- VT (Viton)
- EP (Ethylene Propylene)
- SI (Silicone)
- NE (Neoprene)

Options

SL – Locks against accidental disconnect. To connect again align ball with slot. After disconnection, rotate sleeve to lock. To disconnect, realign ball with slot and retract seeve.

To order add suffix -SL to socket catalog numbers.

Operation

Manual - socket sleeve must be manually retracted to connect and disconnect.

Interchangeability:

HH Series interchanges with Snap-Tite "H" Series.

HI Series interchanges with Snap-Tite "IH" Series.



Series FF

1/8" - 1 1/2" Body Size

Flush Face Hydraulic Couplings Interchange ISO 16028

SOCKETS



Part #	Material	Seal Type	Body Size	FNPT Thread Size	Working		Drop At Rated Flow		Rated Flow Max		Dust Cap & Dust Plug
					PSI	Bar	PSI	Bar	Gal/min	L/min.	
FF1HS	Steel	BUNA	1/8"	1/8"	6090	420	9.42	0.65	0.79	3	N/A
FF1HS-SS	316SS	VITON	1/8"	1/8"	6090	420	9.42	0.65	0.79	3	N/A
FF2HS	Steel	BUNA	1/4"	1/4"	6090	420	13.48	0.93	3.17	12	FF2DPM
FF2HS-SS	316SS	VITON	1/4"	1/4"	6090	420	13.48	0.93	3.17	12	FF2DPM
FF3HS	Steel	BUNA	3/8"	3/8"	5075	350	10.45	0.7	6.07	23	FF3DPM
FF3HS-SS	316SS	VITON	3/8"	3/8"	5075	350	10.45	0.7	6.07	23	FF3DPM
FF34HS	Steel	BUNA	3/8"	1/2"	5075	350	10.45	0.7	6.07	23	FF3DPM
FF34HS-SS	316SS	VITON	3/8"	1/2"	5075	350	10.45	0.7	6.07	23	FF3DPM
FF4HS	Steel	BUNA	1/2"	1/2"	4785	330	10.45	0.7	11.89	45	FF4DPM
FF4HS-SS	316SS	VITON	1/2"	1/2"	4785	330	10.45	0.7	11.89	45	FF4DPM
FF46HS	Steel	BUNA	1/2"	3/4"	4785	330	10.45	0.7	11.89	45	FF4DPM
FF46HS-SS	316SS	VITON	1/2"	3/4"	4785	330	10.45	0.7	11.89	45	FF4DPM
FF6HS	Steel	BUNA	3/4"	3/4"	4785	330	11.6	0.8	19.55	74	FF6DPM
FF6HS-SS	316SS	VITON	3/4"	3/4"	4785	330	11.6	0.8	19.55	74	FF6DPM
FF8HS	Steel	BUNA	1"	1"	4785	330	10.45	0.7	26.42	100	FF8DPM
FF8HS-SS	316SS	VITON	1"	1"	4785	330	10.45	0.7	26.42	100	FF8DPM
FF10HS	Steel	BUNA	1 1/4"	1 1/4"	4350	300	11.6	0.8	48.93	189	N/A
FF10HS-SS	316SS	VITON	1 1/4"	1 1/4"	4350	300	11.6	0.8	48.93	189	N/A
FF12HS	Steel	BUNA	1 1/2"	1 1/2"	3915	270	6.52	0.45	76.08	288	N/A
FF12HS-SS	316SS	VITON	1 1/2"	1 1/2"	3915	270	6.52	0.45	76.08	288	N/A

PLUGS




Part #	Material	Seal Type	Body Size	FNPT Thread Size	Working		Drop At Rated Flow		Rated Flow Max		Dust Cap & Dust Plug
					PSI	Bar	PSI	Bar	Gal/min	L/min.	
FF1HP	Steel	BUNA	1/8"	1/8"	6090	420	9.42	0.65	0.79	3	N/A
FF1HP-SS	316SS	VITON	1/8"	1/8"	6090	420	9.42	0.65	0.79	3	N/A
FF2HP	Steel	BUNA	1/4"	1/4"	6090	420	13.48	0.93	3.17	12	FF2DCM
FF2HP-SS	316SS	VITON	1/4"	1/4"	6090	420	13.48	0.93	3.17	12	FF2DCM
FF3HP	Steel	BUNA	3/8"	3/8"	5075	350	10.45	0.7	6.07	23	FF3DCM
FF3HP-SS	316SS	VITON	3/8"	3/8"	5075	350	10.45	0.7	6.07	23	FF3DCM
FF34HP	Steel	BUNA	3/8"	1/2"	5075	350	10.45	0.7	6.07	23	FF3DCM
FF34HP-SS	316SS	VITON	3/8"	1/2"	5075	350	10.45	0.7	6.07	23	FF3DCM
FF4HP	Steel	BUNA	1/2"	1/2"	4785	330	10.45	0.7	11.89	45	FF4DCM
FF4HP-SS	316SS	VITON	1/2"	1/2"	4785	330	10.45	0.7	11.89	45	FF4DCM
FF46HP	Steel	BUNA	1/2"	3/4"	4785	330	10.45	0.7	11.89	45	FF4DCM
FF46HP-SS	316SS	VITON	1/2"	3/4"	4785	330	10.45	0.7	11.89	45	FF4DCM
FF6HP	Steel	BUNA	3/4"	3/4"	4785	330	11.6	0.8	19.55	74	FF6DCM
FF6HP-SS	316SS	VITON	3/4"	3/4"	4785	330	11.6	0.8	19.55	74	FF6DCM
FF8HP	Steel	BUNA	1"	1"	4785	330	10.45	0.7	26.42	100	FF8DCM
FF8HP-SS	316SS	VITON	1"	1"	4785	330	10.45	0.7	26.42	100	FF8DCM
FF10HP	Steel	BUNA	1 1/4"	1 1/4"	4350	300	11.6	0.8	48.93	189	N/A
FF10HP-SS	316SS	VITON	1 1/4"	1 1/4"	4350	300	11.6	0.8	48.93	189	N/A
FF12HP	Steel	BUNA	1 1/2"	1 1/2"	3915	270	6.52	0.45	76.08	288	N/A
FF12HP-SS	316SS	VITON	1 1/2"	1 1/2"	3915	270	6.52	0.45	76.08	288	N/A


Series F


1/8" - 1" Body Size



Straight Thru

SOCKETS	Part #	Material	Body Size	Thread FNPT Size	Connected Max Operating Pressure		Rated Flow Max	
					PSI	Bar	Gal./min.	L/min.
						1FB	Brass	1/8"
	1F-SS	303SS	1/8"	1/8"	4200	290	3	11.35
	2FB	Brass	1/4"	1/4"	5200	358	6	22.71
	2F-SS	303SS	1/4"	1/4"	5000	344	6	22.71
	3FB	Brass	3/8"	3/8"	2700	186	12	45.42
	3F-SS	303SS	3/8"	3/8"	5500	379	12	45.42
	4FB	Brass	1/2"	1/2"	2200	151	12	45.42
	4F-SS	303SS	1/2"	1/2"	3000	206	12	45.42
	6FB	Brass	3/4"	3/4"	1700	117	28	106
	6F-SS	303SS	3/4"	3/4"	3000	206	28	106
	8FB	Brass	1"	1"	1200	82	50	190
	8F-SS	303SS	1"	1"	1700	117	50	190

SOCKETS	Part #	Material	Body Size	Thread MNPT Size	Connected Max Operating Pressure		Rated Flow Max	
					PSI	Bar	Gal./min.	L/min.
						1FMB	Brass	1/8"
	1FM-SS	303SS	1/8"	1/8"	4200	290	3	11.35
	2FMB	Brass	1/4"	1/4"	5200	358	6	22.71
	2FM-SS	303SS	1/4"	1/4"	5000	344	6	22.71
	3FMB	Brass	3/8"	3/8"	2700	186	12	45.42
	3FM-SS	303SS	3/8"	3/8"	5500	379	12	45.42
	4FMB	Brass	1/2"	1/2"	2200	151	12	45.42
	4FM-SS	303SS	1/2"	1/2"	3000	206	12	45.42
	6FMB	Brass	3/4"	3/4"	1700	117	28	106
	6FM-SS	303SS	3/4"	3/4"	3000	206	28	106
	8FMB	Brass	1"	1"	1200	82	50	190
	8FM-SS	303SS	1"	1"	1700	117	50	190

SOCKETS	Part #	Material	Body Size	Hose Barb Size	Connected Max Operating Pressure		Rated Flow Max	
					PSI	Bar	Gal./min.	L/min.
						1BS	Brass	1/8"
	1BS-SS	303SS	1/8"	1/4" I.D.	300	21	3	11.35
	2BS	Brass	1/4"	1/4" I.D.	300	21	6	22.71
	3BS	Brass	3/8"	3/8" I.D.	300	21	12	45.42
	4BS	Brass	1/2"	1/2" I.D.	300	21	12	45.42
	6BS	Brass	3/4"	3/4" I.D.	300	21	28	106
	8BS	Brass	1"	1" I.D.	300	21	50	190

Standard Seals Are BUNA
Use Suffixes Below For
Other Seals:


- VT (Viton)
- EP (Ethylene Propylene)
- NE (Neoprene)
- SI (Silicone)


Options:
Sleeve Lock
Use Suffix:
-SL (Sleeve Lock)


*Couplers have same
inside diameter
as nominal pipe.*

Socket Construction
• B (Brass)
• SS (303 Stainless Steel)

Plug Construction
Steel, Zinc Plated
Brass
303SS

PLUGS	Part #	Material	Body Size	Thread FNPT Size	Connected Max Operating Pressure		Rated Flow Max	
					PSI	Bar	Gal./min.	L/min.
						1FPS	Steel	1/8"
	1FPB	Brass	1/8"	1/8"	2500	172	3	11.35
	1FP-SS	303SS	1/8"	1/8"	4200	290	3	11.35
	2FPS	Steel	1/4"	1/4"	5200	358	6	22.71
	2FPB	Brass	1/4"	1/4"	5500	379	6	22.71
	2FP-SS	303SS	1/4"	1/4"	5000	344	6	22.71
	3FPS	Steel	3/8"	3/8"	2700	186	12	45.42
	3FPB	Brass	3/8"	3/8"	3500	241	12	45.42
	3FP-SS	303SS	3/8"	3/8"	5500	379	12	45.42
	4FPS	Steel	1/2"	1/2"	2200	151	12	45.42
	4FPB	Brass	1/2"	1/2"	2700	186	12	45.42
	4FP-SS	303SS	1/2"	1/2"	3000	206	12	45.42
	6FPS	Steel	3/4"	3/4"	1700	117	28	106
	6FPB	Brass	3/4"	3/4"	2700	186	28	106
	6FP-SS	303SS	3/4"	3/4"	3000	206	28	106
	8FPS	Steel	1"	1"	1200	82	50	190
	8FPB	Brass	1"	1"	2000	138	50	190
	8FP-SS	303SS	1"	1"	1700	117	50	190

PLUGS	Part #	Material	Body Size	Thread MNPT Size	Connected Max Operating Pressure		Rated Flow Max	
					PSI	Bar	Gal./min.	L/min.
						1FPMS	Steel	1/8"
	1FPMB	Brass	1/8"	1/8"	2500	172	3	11.35
	1FPM-SS	303SS	1/8"	1/8"	4200	290	3	11.35
	2FPMS	Steel	1/4"	1/4"	5200	358	6	22.71
	2FPMB	Brass	1/4"	1/4"	5500	379	6	22.71
	2FPM-SS	303SS	1/4"	1/4"	5000	344	6	22.71
	3FPMS	Steel	3/8"	3/8"	2700	186	12	45.42
	3FPMB	Brass	3/8"	3/8"	3500	241	12	45.42
	3FPM-SS	303SS	3/8"	3/8"	5500	379	12	45.42
	4FPMS	Steel	1/2"	1/2"	2200	151	12	45.42
	4FPMB	Brass	1/2"	1/2"	2700	186	12	45.42
	4FPM-SS	303SS	1/2"	1/2"	3000	206	12	45.42
	6FPMS	Steel	3/4"	3/4"	1700	117	28	106
	6FPMB	Brass	3/4"	3/4"	2700	186	28	106
	6FPM-SS	303SS	3/4"	3/4"	3000	206	28	106
	8FPMS	Steel	1"	1"	1200	82	50	190
	8FPMB	Brass	1"	1"	2000	138	50	190
	8FPM-SS	303SS	1"	1"	1700	117	50	190

PLUGS	Part #	Material	Body Size	Hose Barb Size	Connected Max Operating Pressure		Rated Flow Max	
					PSI	Bar	Gal./min.	L/min.
						1BPB	Brass	1/8"
	1BP-SS	303SS	1/8"	1/4" I.D.	300	21	3	11.35
	2BPS	Steel	1/4"	1/4" I.D.	300	21	6	22.71
	2BPB	Brass	1/4"	1/4" I.D.	300	21	6	22.71
	3BPS	Steel	3/8"	3/8" I.D.	300	21	12	45.42
	3BPB	Brass	3/8"	3/8" I.D.	300	21	12	45.42
	4BPS	Steel	1/2"	1/2" I.D.	300	21	12	45.42
	4BPB	Brass	1/2"	1/2" I.D.	300	21	12	45.42
	6BPS	Steel	3/4"	3/4" I.D.	300	21	28	106
	6BPB	Brass	3/4"	3/4" I.D.	300	21	28	106
	8BPS	Steel	1"	1" I.D.	300	21	50	190
	8BPB	Brass	1"	1" I.D.	300	21	50	190



Series HAL & HSS

3/4" - 3" Body Size
Maximum 150 PSI

Cam Lock Couplings

Aluminum	316SS	Size	
HAL-A050	HSS-A050	1/2"	
HAL-A075	HSS-A075	3/4"	
HAL-A100	HSS-A100	1"	
HAL-A125	HSS-A125	1 1/4"	
HAL-A150	HSS-A150	1 1/2"	
HAL-A200	HSS-A200	2"	
HAL-A250	HSS-A250	2 1/2"	
HAL-A300	HSS-A300	3"	
HAL-B050	HSS-B050	1/2"	
HAL-B075	HSS-B075	3/4"	
HAL-B100	HSS-B100	1"	
HAL-B125	HSS-B125	1 1/4"	
HAL-B150	HSS-B150	1 1/2"	
HAL-B200	HSS-B200	2"	
HAL-B250	HSS-B250	2 1/2"	
HAL-B300	HSS-B300	3"	
HAL-C050	HSS-C050	1/2"	
HAL-C075	HSS-C075	3/4"	
HAL-C100	HSS-C100	1"	
HAL-C125	HSS-C125	1 1/4"	
HAL-C150	HSS-C150	1 1/2"	
HAL-C200	HSS-C200	2"	
HAL-C250	HSS-C250	2 1/2"	
HAL-C300	HSS-C300	3"	
HAL-D050	HSS-D050	1/2"	
HAL-D075	HSS-D075	3/4"	
HAL-D100	HSS-D100	1"	
HAL-D125	HSS-D125	1 1/4"	
HAL-D150	HSS-D150	1 1/2"	
HAL-D200	HSS-D200	2"	
HAL-D250	HSS-D250	2 1/2"	
HAL-D300	HSS-D300	3"	
HAL-E050	HSS-E050	1/2"	
HAL-E075	HSS-E075	3/4"	
HAL-E100	HSS-E100	1"	
HAL-E125	HSS-E125	1 1/4"	
HAL-E150	HSS-E150	1 1/2"	
HAL-E200	HSS-E200	2"	
HAL-E250	HSS-E250	2 1/2"	
HAL-E300	HSS-E300	3"	

Aluminum	316SS	Size	
HAL-F050	HSS-F050	1/2"	
HAL-F075	HSS-F075	3/4"	
HAL-F100	HSS-F100	1"	
HAL-F125	HSS-F125	1 1/4"	
HAL-F150	HSS-F150	1 1/2"	
HAL-F200	HSS-F200	2"	
HAL-F250	HSS-F250	2 1/2"	
HAL-F300	HSS-F300	3"	
HAL-DC050	HSS-DC050	1/2"	
HAL-DC075	HSS-DC075	3/4"	
HAL-DC100	HSS-DC100	1"	
HAL-DC125	HSS-DC125	1 1/4"	
HAL-DC150	HSS-DC150	1 1/2"	
HAL-DC200	HSS-DC200	2"	
HAL-DC250	HSS-DC250	2 1/2"	
HAL-DC300	HSS-DC300	3"	
HAL-DP050	HSS-DP050	1/2"	
HAL-DP075	HSS-DP075	3/4"	
HAL-DP100	HSS-DP100	1"	
HAL-DP125	HSS-DP125	1 1/4"	
HAL-DP150	HSS-DP150	1 1/2"	
HAL-DP200	HSS-DP200	2"	
HAL-DP250	HSS-DP250	2 1/2"	
HAL-DP300	HSS-DP300	3"	

ALUMINUM SPECS

HAL - Handles
Forged Brass

HAL - Pull Rings
Zinc-Plated Carbon Steel

HAL - Gaskets
Buna-N

Operating Temperature
1/2" - 3": 150 PSI

HAL - Slot Pins
Zinc-Plated Carbon Steel

HAL - Safety Clips
Carbon Steel

HAL - Body

Aluminum alloy, specifically designed for high tensile strength, lightness and rigidity.

STAINLESS SPECS

HSS - Handles
Type 316SS

HSS - Pull Rings
Stainless

HSS - Gaskets
Buna-N

Operating Temperature
1/2" - 3": 150 PSI

HSS - Slot Pins
Type 304SS

HAL - Safety Clips
Stainless

Mil Spec 27487 Except Sizes 5" & 8" ASTM Specs

HSS - Body

Stainless Steel Type 316SS (ASTM A351 Grade CF8M).

Every melt is analyzed for chemical composition.




A chemical test certification showing the general composition is available upon request.




Series HJT Sockets




1/4", 3/8", 1/2"
Maximum 200 PSI



DME Jiffy-Tite and Jiffy-Matic and Parker Moldmate Interchange.

1/4" Socket	Hose I.D.	Straight-Thru		One-Way (Valved)		Two-Way (Valved)	
		Reg. Barb	Push-On	Reg. Barb	Push-On	Reg. Barb	Push-On
 STRAIGHT HOSE STEM	1/4"	HS204	HS204PL	HS204V	HS204VPL	N/A	N/A
	5/16"	HS205	N/A	HS205V		N/A	N/A
	3/8"	HS206	HS206PL	HS206V	HS206VPL	N/A	N/A
 45 DEGREE HOSE STEM	1/4"	HS224	HS224PL	HS224V	HS224VPL	N/A	N/A
	5/16"	HS225	N/A	HS225V	N/A	N/A	N/A
	3/8"	HS226	HS226PL	HS226V	HS226VPL	N/A	N/A
 90 DEGREE HOSE STEM	1/4"	HS214	HS214PL	HS214V	HS214VPL	N/A	N/A
	5/16"	HS215	N/A	HS215V	N/A	N/A	N/A
	3/18"	HS216	HS216PL	HS216V	HS216VPL	N/A	N/A

3/8" Socket	Hose I.D.	Straight-Thru		One-Way (Valved)		Two-Way (Valved)	
		Reg. Barb	Push-On	Reg. Barb	Push-On	Reg. Barb	Push-On
 STRAIGHT HOSE STEM	3/8"	HS306	HS306PL	HS306V	HS306VPL	HS306V2	HS306VPL2
	1/2"	HS308	HS308PL	HS308V	HS308VPL	HS308V2	HS308VPL2
 45 DEGREE HOSE STEM	3/8"	HS326	HS326PL	HS326V	HS326VPL	HS326V2	HS326VPL2
	1/2"	HS328	HS328PL	HS328V	HS328VPL	HS328V2	HS328VPL2
 90 DEGREE HOSE STEM	3/8"	HS316	HS316PL	HS316V	HS316VPL	HS316V2	HS316VPL2
	1/2"	HS318	HS318PL	HS318V	HS318VPL	HS318V2	HS318VPL2

1/2" Socket	Hose I.D.	Straight-Thru	
		Reg. Barb	Push-On
 STRAIGHT HOSE STEM	1/2"	HS504	HS504PL
	3/4"	HS506	N/A
 45 DEGREE HOSE STEM	1/2"	HS524	HS524PL
	3/4"	HS526	N/A
 90 DEGREE HOSE STEM	1/2"	HS514	HS514PL
	3/4"	HS516	N/A

High Flow	Straight Hose Stem	Push-Lock
High Flow Version 13.8 GPM	HS308HF	HS308HFPL
	HS318HF	HS318HFPL

Just the sockets are available.

Part #	Flow Water-GPM 10 PSIG Pressure Drop
HS200	4.5
HS200V	2.3
HS300	10
HS300HF	13.8
HS300V	5.9
HS500	28.2

Socket sleeve must be manually retracted to connect and disconnect.

Precision leakproof seal, lathe cut from silicone tubing. Two piece construction on straight stem sockets. Double knurl on socket sleeve for easier grip.


Sockets have six balls, 200 PSIG, -65 to 425°F

Two-way sockets and plugs eliminate coolant loss through automatic shut off at disconnect.

Two-way plugs can only be used with two-way sockets.

Regular plugs may be used with either straight-thru or one-way sockets.

Socket Only

	Size	Unvalved	Valved
	1/8" FPT	HS200	HS200V
	1/4" FPT	HS300	HS300V
	3/8" FPT	HS300HF	N/A
	1/2" FPT	HS500	N/A




Series HJT Plugs

1/4", 3/8", 1/2"
Maximum 200 PSI

DME Jiffy-Tite and Jiffy-Matic and Parker Moldmate Interchange.

Valved Plugs

	MNPT	Steel 1/4" Plug	Brass 1/4" Plug	Valved
	1/8"	N/A	HP251	N/A
	1/4"	HP252S	HP252	N/A
	3/8"	N/A	HP253	N/A
	MNPT	Steel 3/8" Plug	Brass 3/8" Plug	Valved
	1/8"	N/A	HP351	N/A
	1/4"	HP352S	HP352	N/A
	3/8"	N/A	HP353	HP353V
	1/2"	N/A	HP354	N/A
	MNPT	Steel 1/2" Plug	Brass 1/2" Plug	Valved
	1/2"	N/A	HP554B	N/A
	3/4"	N/A	HP556B	N/A

Socket sleeve must be manually retracted to connect and disconnect.

Precision leakproof seal, lathe cut from silicone tubing. Two piece construction on straight stem sockets. Double knurl on socket sleeve for easier grip.


Sockets have six balls, 200 PSIG, -65 to 425°F

Two-way sockets and plugs eliminate coolant loss through automatic shut off at disconnect.


Two-way plugs can only be used with two-way sockets.

Regular plugs may be used with either straight-thru or one-way sockets.

Unvalved Plugs

	FNPT	Steel 1/4" Plug	Brass 1/4" Plug
	1/8"	HP251F	HP251FB
	1/4"	HP252F	HP252FB
	3/8"	HP253F	N/A
	FNPT	Steel 3/8" Plug	Brass 3/8" Plug
	1/4"	HP352F	HP352FB
	3/8"	HP353F	HP353FB
	FNPT	Steel 1/2" Plug	Brass 1/2" Plug
	1/2"	HP554F	N/A
	3/4"	HP556F	N/A

Extension Plugs

	HP251X__	1/4" Plug	X 1/8" MPT
	HP252X__	1/4" Plug	X 1/4" MPT
	HP253X__	1/4" Plug	X 3/8" MPT
	HP352X__	3/8" Plug	X 1/4" MPT
	HP353X__	3/8" Plug	X 3/8" MPT
	HP354X__	3/8" Plug	X 1/2" MPT
	HP554X__	1/2" Plug	X 1/2" MPT

Lengths Available: 2.5", 4", 5.5", 7", 8.5"

One piece construction for fast assembly, positive removal.

Installation problems associated with pipe nipple extensions on standard plugs are eliminated.

One-piece brass construction eliminates a potential leak.


Point and ensures removability.





Stainless Steel Push In Fittings


Specifications


Max Rating: 290 PSI Tightness Ring: 316SS
 Temperature: -4 to 302°F Gripping Collet: 301SS
 Body: 316SS Protection Ring: 301SS
 Release Ring: 316SS Sealing Oring: Viton


	Male Straight Part #	Tube O.D.	Male NPT
	H1168X4-SS	1/4"	1/8"
	H1168X4X4-SS	1/4"	1/4"
	H1168X6-SS	3/8"	1/4"
	H1168X6X6-SS	3/8"	3/8"
	H1168X8X4-SS	1/2"	1/4"
	H1168X8-SS	1/2"	3/8"
	H1168X8X8-SS	1/2"	1/2"


	Male Swivel Tee Part #	Tube O.D.	Male NPT
	H1172X4S-SS	1/4"	1/8"
	H1172X4X4S-SS	1/4"	1/4"
	H1172X6S-SS	3/8"	1/4"
	H1172X6X6S-SS	3/8"	3/8"
	H1172X8S-SS	1/2"	3/8"
	H1172X8X8S-SS	1/2"	1/2"


	Male Swivel Elbow Part #	Tube O.D.	Male NPT
	H1169X4S-SS	1/4"	1/8"
	H1169X4X4S-SS	1/4"	1/4"
	H1169X6S-SS	3/8"	1/4"
	H1169X6X6S-SS	3/8"	3/8"
	H1169X8X4S-SS	1/2"	1/4"
	H1169X8S-SS	1/2"	3/8"
	H1169X8X8S-SS	1/2"	1/2"

	Union Part #	Tube O.D.
	H1162X4-SS	1/4"
	H1162X6-SS	3/8"
	H1162X8-SS	1/2"

	Union Tee Part #	Tube O.D.
	H1164X4-SS	1/4"
	H1164X6-SS	3/8"
	H1164X8-SS	1/2"

	Union Elbow Part #	Tube O.D.
	H1165X4-SS	1/4"
	H1165X6-SS	3/8"
	H1165X8-SS	1/2"


	Female Straight Part #	Tube O.D.	Female NPT
	H1166X4-SS	1/4"	1/8"
	H1166X4X4-SS	1/4"	1/4"
	H1166X6-SS	3/8"	1/4"
	H1166X6X6-SS	3/8"	3/8"
	H1166X8-SS	1/2"	3/8"
	H1166X8X8-SS	1/2"	1/2"


	Bulkhead Union Part #	Tube O.D.
	H1174X4-SS	1/4"
	H1174X6-SS	3/8"
	H1174X8-SS	1/2"


Nickel Plated Brass Push In Fittings


Specifications


Max Rating: 217 PSI Tightness Ring: Acetal
 Temperature: -4 to 160°F Gripping Collet: 301SS
 Body: Brass Nickel Plated Protection Ring: Acetal
 Release Ring: Brass Nickel Plated Sealing Oring: Buna


	Male Straight Part #	Tube O.D.	Male NPT
	H1168X4	1/4"	1/8"
	H1168X4X4	1/4"	1/4"
	H1168X6	3/8"	1/4"
	H1168X6X6	3/8"	3/8"
	H1168X8X4	1/2"	1/4"
	H1168X8	1/2"	3/8"
	H1168X8X8	1/2"	1/2"


	Male Swivel Tee Part #	Tube O.D.	Male NPT
	H1172X4S	1/4"	1/8"
	H1172X4X4S	1/4"	1/4"
	H1172X6S	3/8"	1/4"
	H1172X6X6S	3/8"	3/8"
	H1172X8S	1/2"	3/8"
	H1172X8X8S	1/2"	1/2"


	Male Swivel Elbow Part #	Tube O.D.	Male NPT
	H1169X4S	1/4"	1/8"
	H1169X4X4S	1/4"	1/4"
	H1169X6S	3/8"	1/4"
	H1169X6X6S	3/8"	3/8"
	H1169X8X4S	1/2"	1/4"
	H1169X8S	1/2"	3/8"
	H1169X8X8S	1/2"	1/2"

	Union Part #	Tube O.D.
	H1162X4	1/4"
	H1162X6	3/8"
	H1162X8	1/2"

	Union Tee Part #	Tube O.D.
	H1164X4	1/4"
	H1164X6	3/8"
	H1164X8	1/2"

	Union Elbow Part #	Tube O.D.
	H1165X4	1/4"
	H1165X6	3/8"
	H1165X8	1/2"

	Female Straight Part #	Tube O.D.	Female NPT
	H1166X4	1/4"	1/8"
	H1166X4X4	1/4"	1/4"
	H1166X6	3/8"	1/4"
	H1166X6X6	3/8"	3/8"

	Bulkhead Union Part #	Tube O.D.
	H1174X4	1/4"
	H1174X6	3/8"
	H1174X8	1/2"



Barbed Fittings

1/8" - 1"

Brass, Brass Electroless Nickel Plated, 303SS, 316SS

Standard Hose Barbs

Hose I.D.	NPT	Male NPT Rigid Brass Straight	Male NPT Rigid Electroless Nickel Plated	Male NPT Rigid 303SS Straight	Male NPT Rigid 316SS Straight	Male NPT Swivel Brass Straight	Male NPT Swivel Electroless Nickel Plated	Male NPT Rigid Brass 45 Deg.	Male NPT Rigid Electroless Nickel Plated	Male NPT Rigid Brass 90 Deg.	Male NPT Rigid Electroless Nickel Plated
1/8"	1/8"	B001	B001-EN	B001-SS	B001-S6	N/A	N/A	N/A	N/A	N/A	N/A
1/8"	1/4"	B002	B002-EN	B002-SS	N/A	N/A	N/A	N/A	N/A	N/A	N/A
3/16"	1/8"	B101	B101-EN	B101-SS	B101-S6	N/A	N/A	N/A	N/A	B101-90	B101-90-EN
3/16"	1/4"	B102	B102-EN	B102-SS	B102-S6	N/A	N/A	N/A	N/A	N/A	N/A
1/4"	1/8"	B201	B201-EN	B201-SS	B201-S6	N/A	N/A	B201-45	B201-45-EN	B201-90	B201-90-EN
1/4"	1/4"	B202	B202-EN	B202-SS	B202-S6	B202-SW	B202-SW-EN	B202-45	B202-45-EN	B202-90	B202-90-EN
1/4"	3/8"	B203	B203-EN	B203-SS	B203-S6	N/A	N/A	N/A	N/A	B203-90	B203-90-EN
5/16"	1/8"	B501	B501-EN	N/A	B501-S6	N/A	N/A	N/A	N/A	B501-90	B501-90-EN
5/16"	1/4"	B502	B502-EN	B502-SS	B502-S6	N/A	N/A	N/A	N/A	B502-90	B502-90-EN
5/16"	3/8"	B503	B503-EN	B503-SS	B503-S6	N/A	N/A	N/A	N/A	B503-90	B503-90-EN
3/8"	1/8"	B301	B301-EN	B301-SS	B301-S6	N/A	N/A	B301-45	B301-45-EN	B301-90	B301-90-EN
3/8"	1/4"	B302	B302-EN	B302-SS	B302-S6	B302-SW	B302-SW-EN	B302-45	B302-45-EN	B302-90	B302-90-EN
3/8"	3/8"	B303	B303-EN	B303-SS	B303-S6	B303-SW	B303-SW-EN	B303-45	B303-45-EN	B303-90	B303-90-EN
3/8"	1/2"	B304	B304-EN	B304-SS	B304-S6	N/A	N/A	N/A	N/A	N/A	N/A
1/2"	1/4"	B402	B402-EN	B402-SS	B402-S6	N/A	N/A	B402-45	B402-45-EN	B402-90	B402-90-EN
1/2"	3/8"	B403	B403-EN	B403-SS	B403-S6	B403-SW	B403-SW-EN	B403-45	B403-45-EN	B403-90	B403-90-EN
1/2"	1/2"	B404	B404-EN	B404-SS	B404-S6	B404-SW	B404-SW-EN	B404-45	B404-45-EN	B404-90	B404-90-EN
1/2"	3/4"	B406	B406-EN	N/A	B406-S6	N/A	N/A	N/A	N/A	N/A	N/A
3/4"	1/2"	B604	B604-EN	B604-SS	B604-S6	N/A	N/A	N/A	N/A	B604-90	B604-90-EN
3/4"	3/4"	B606	B606-EN	B606-SS	B606-S6	B606-SW	B606-SW-EN	N/A	N/A	B606-90	B606-90-EN
1"	1"	B808	B808-EN	N/A	N/A	N/A	N/A	N/A	N/A	B808-90	B808-90-EN

Hose Splicers

Hose I.D.		Standard Hose Barb Brass	Standard Hose Barb Electroless Nickel	Standard Hose Barb 303SS	90 Degree Standard Hose Barb Brass	90 Degree Standard Hose Barb Electroless Nickel	Tee Standard Hose Barb Brass	Tee Standard Hose Barb Electroless Nickel
1/8"		HS001	HS001-EN	HS001-SS	N/A	N/A	N/A	N/A
3/16"		HS101	HS101-EN	N/A	N/A	N/A	HS101-T	HS101-T-EN
1/4"		HS202	HS202-EN	HS202-SS	HS202-90	HS202-90-EN	HS202-T	HS202-T-EN
5/16"		HS505	HS505-EN	N/A	HS505-90	HS505-90-EN	HS505-T	HS505-T-EN
3/8"		HS303	HS303-EN	HS303-SS	HS303-90	HS303-90-EN	HS303-T	HS303-T-EN
1/2"		HS404	HS404-EN	HS404-SS	HS404-90	HS404-90-EN	HS404-T	HS404-T-EN
3/4"		HS606	HS606-EN	HS606-SS	HS606-90	HS606-90-EN	HS606-T	HS606-T-EN

Push Lok Barbs

Hose I.D.	NPT	Brass Straight	Male NPT Electroless Nickel Plated Straight	Male NPT 303SS Straight	Swivel Brass Straight	Swivel Electroless Nickel Plated Straight	Female Rigid Brass Straight	Female NPT Electroless Nickel Plated Straight	Brass 90 Degree	Brass 90 Degree Electroless Nickel	Push Lock Hose Barb Brass	Push Lock Hose Barb Electroless Nickel
1/4"	1/8"	B201-PL	B201-PL-EN	B201-PL-SS	N/A	N/A	F201-PL	F201-PL-EN	B201-PL-90	B201-PL-90-EN	N/A	N/A
1/4"	1/4"	B202-PL	B202-PL-EN	B202-PL-SS	B202-PL-SW	B202-PL-SW-EN	F202-PL	F202-PL-EN	B202-PL-90	B202-PL-90-EN	HS202-PL	HS202-PL-EN
3/8"	1/4"	B302-PL	B302-PL-EN	B302-PL-SS	B302-PL-SW	B302-PL-SW-EN	F302-PL	F302-PL-EN	B302-PL-90	B302-PL-90-EN	N/A	N/A
3/8"	3/8"	B303-PL	B303-PL-EN	B303-PL-SS	B303-PL-SW	B303-PL-SW-EN	F303-PL	F303-PL-EN	B303-PL-90	B303-PL-90-EN	HS303-PL	HS303-PL-EN
1/2"	3/8"	B403-PL	B403-PL-EN	B403-PL-SS	B403-PL-SW	B403-PL-SW-EN	F403-PL	F403-PL-EN	B403-PL-90	B403-PL-90-EN	N/A	N/A
1/2"	1/2"	B404-PL	B404-PL-EN	B404-PL-SS	B404-PL-SW	B404-PL-SW-EN	F404-PL	F404-PL-EN	B404-PL-90	B404-PL-90-EN	HS404-PL	HS404-PL-EN

Reusable Fittings

3/16" - 1/2"
Maximum 250 PSI



Male Thread

BRASS	Reusable X Male NPT I.D. x O.D.				
	1/8" MNPT	1/4" MNPT	3/8" MNPT	1/2" MNPT	
	3/16" x 3/8"	H1-AA	H2-AA	N/A	N/A
	1/4" x 7/16"	H1-H1	H2-H1	H4-H1	N/A
	1/4" x 15/32"	H1-H2	H2-H2	H4-H2	N/A
	1/4" x 1/2"	H1-H3	H2-H3	H4-H3	N/A
	1/4" x 9/16"	H1-H5	H2-H5	H4-H5	N/A
	1/4" x 5/8"	H1-H7	H2-H7	H4-H7	N/A
	5/16" x 9/16"	N/A	H2-E5	H4-E5	N/A
	5/16" x 5/8"	N/A	H2-E7	H4-E7	N/A
	3/8" x 5/8"	N/A	H2-J7	H4-J7	H6-J7
	3/8" x 11/16"	N/A	H2-J9	H4-J9	H6-J9
	3/8" x 3/4"	N/A	H2-J11	H4-J11	H6-J11
	1/2" x 13/16"	N/A	H2-K13	H4-K13	H6-K13
	1/2" x 7/8"	N/A	H2-K15	H4-K15	H6-K15
	1/2" x 15/16"	N/A	H2-K17	H4-K17	H6-K17

CHROME PLATED	Reusable X Male NPT I.D. x O.D.				
	1/8" MNPT	1/4" MNPT	3/8" MNPT	1/2" MNPT	
	3/16" x 3/8"	H1-AA-C*	H2-AA-C*	N/A	N/A
	1/4" x 7/16"	H1-H1-C*	H2-H1-C*	H4-H1-C*	N/A
	1/4" x 15/32"	H1-H2-C*	H2-H2-C*	H4-H2-C*	N/A
	1/4" x 1/2"	H1-H3-C*	H2-H3-C*	H4-H3-C*	N/A
	1/4" x 9/16"	H1-H5-C*	H2-H5-C*	H4-H5-C*	N/A
	1/4" x 5/8"	H1-H7-C*	H2-H7-C*	H4-H7-C*	N/A
	5/16" x 9/16"	N/A	H2-E5-C*	H4-E5-C*	N/A
	5/16" x 5/8"	N/A	H2-E7-C*	H4-E7-C*	N/A
	3/8" x 5/8"	N/A	H2-J7-C*	H4-J7-C*	H6-J7-C*
	3/8" x 11/16"	N/A	H2-J9-C*	H4-J9-C*	H6-J9-C*
	3/8" x 3/4"	N/A	H2-J11-C*	H4-J11-C*	H6-J11-C*
	1/2" x 13/16"	N/A	H2-K13-C*	H4-K13-C*	H6-K13-C*
	1/2" x 7/8"	N/A	H2-K15-C*	H4-K15-C*	H6-K15-C*
	1/2" x 15/16"	N/A	H2-K17-C*	H4-K17-C*	H6-K17-C*

ELECTROLESS NICKEL PLATED	Reusable X Male NPT I.D. x O.D.				
	1/8" MNPT	1/4" MNPT	3/8" MNPT	1/2" MNPT	
	3/16" x 3/8"	H1-AA-EN	H2-AA-EN	N/A	N/A
	1/4" x 7/16"	H1-H1-EN	H2-H1-EN	H4-H1-EN	N/A
	1/4" x 15/32"	H1-H2-EN	H2-H2-EN	H4-H2-EN	N/A
	1/4" x 1/2"	H1-H3-EN	H2-H3-EN	H4-H3-EN	N/A
	1/4" x 9/16"	H1-H5-EN	H2-H5-EN	H4-H5-EN	N/A
	1/4" x 5/8"	H1-H7-EN	H2-H7-EN	H4-H7-EN	N/A
	5/16" x 9/16"	N/A	H2-E5-EN	H4-E5-EN	N/A
	5/16" x 5/8"	N/A	H2-E7-EN	H4-E7-EN	N/A
	3/8" x 5/8"	N/A	H2-J7-EN	H4-J7-EN	H6-J7-EN
	3/8" x 11/16"	N/A	H2-J9-EN	H4-J9-EN	H6-J9-EN
	3/8" x 3/4"	N/A	H2-J11-EN	H4-J11-EN	H6-J11-EN
	1/2" x 13/16"	N/A	H2-K13-EN	H4-K13-EN	H6-K13-EN
	1/2" x 7/8"	N/A	H2-K15-EN	H4-K15-EN	H6-K15-EN
	1/2" x 15/16"	N/A	H2-K17-EN	H4-K17-EN	H6-K17-EN

STAINLESS STEEL	Reusable X Male NPT I.D. x O.D.				
	1/8" MNPT	1/4" MNPT	3/8" MNPT	1/2" MNPT	
	3/16" x 3/8"	H1-AA-SS	H2-AA-SS	N/A	N/A
	1/4" x 7/16"	H1-H1-SS	H2-H1-SS	N/A	N/A
	1/4" x 15/32"	H1-H2-SS	H2-H2-SS	N/A	N/A
	1/4" x 1/2"	H1-H3-SS	H2-H3-SS	N/A	N/A
	1/4" x 9/16"	H1-H5-SS	H2-H5-SS	N/A	N/A
	1/4" x 5/8"	H1-H7-SS	H2-H7-SS	N/A	N/A
	5/16" x 9/16"	N/A	H2-E5-SS	N/A	N/A
	5/16" x 5/8"	N/A	H2-E7-SS	N/A	N/A
	3/8" x 5/8"	N/A	H2-J7-SS	H4-J7-SS	N/A
	3/8" x 11/16"	N/A	H2-J9-SS	H4-J9-SS	N/A
	3/8" x 3/4"	N/A	H2-J11-SS	H4-J11-SS	N/A
	1/2" x 13/16"	N/A	H2-K13-SS	H4-K13-SS	H6-K13-SS
	1/2" x 7/8"	N/A	H2-K15-SS	H4-K15-SS	H6-K15-SS
	1/2" x 15/16"	N/A	H2-K17-SS	H4-K17-SS	H6-K17-SS

Reusable Hose Fittings

Hofmann reusable hose fittings are strong, efficient, and easy to use. They come in two parts and are sold as assemblies. The stem has either a male or female pipe thread on one end. The other end has a tapered stem to fit inside the hose. The ferrule acts as a collar against which the hose is compressed when assembly is made. This connection fits firmly to the end of the hose, yet is removable and reusable on new hose when the old hose is discarded. Component parts are machined from solid brass rod and stainless steel.








Reusable Fittings

3/16" - 1/2"
Maximum 250 PSI


Female Thread


BRASS	Reusable X Female NPT Straight I.D. x O.D.			
	1/4" - 18 FNPS	3/8" - 18 FNPS	1/2" - 14 FNPS	
	3/16" x 3/8"	N/A	N/A	N/A
	1/4" x 7/16"	H5-H1S	N/A	N/A
	1/4" x 15/32"	H5-H2S	N/A	N/A
	1/4" x 1/2"	H5-H3S	N/A	N/A
	1/4" x 9/16"	H5-H5S	N/A	N/A
	1/4" x 5/8"	H5-H7S	N/A	N/A
	5/16" x 9/16"	H5-E5S	N/A	N/A
	5/16" x 5/8"	H5-E7S	N/A	N/A
	3/8" x 5/8"	H5-J7S	H8-J7S	N/A
	3/8" x 11/16"	H5-J9S	H8-J9S	N/A
	3/8" x 3/4"	H5-J11	H8-J11S	N/A
	1/2" x 13/16"	N/A	N/A	H10-K13S
	1/2" x 7/8"	N/A	N/A	H10-K15S
	1/2" x 15/16"	N/A	N/A	H10-K17S


CHROME PLATED	Reusable X Female NPT Straight I.D. x O.D.			
	1/4" - 18 FNPS	3/8" - 18 FNPS	1/2" - 14 FNPS	
	3/16" x 3/8"	H5-AAS-SS	N/A	N/A
	1/4" x 7/16"	H5-H1S-C*	N/A	N/A
	1/4" x 15/32"	H5-H2S-C*	N/A	N/A
	1/4" x 1/2"	H5-H3S-C*	N/A	N/A
	1/4" x 9/16"	H5-H5S-C*	N/A	N/A
	1/4" x 5/8"	H5-H7S-C*	N/A	N/A
	5/16" x 9/16"	H5-E5S-C*	N/A	N/A
	5/16" x 5/8"	H5-E7S-C*	N/A	N/A
	3/8" x 5/8"	H5-J7S-C*	H8-J7S-C*	N/A
	3/8" x 11/16"	H5-J9S-C*	H8-J9S-C*	N/A
	3/8" x 3/4"	H5-J11-C*	H8-J11S-C*	N/A
	1/2" x 13/16"	N/A	N/A	H10-K13S-C*
	1/2" x 7/8"	N/A	N/A	H10-K15S-C*
	1/2" x 15/16"	N/A	N/A	H10-K17S-C*

ELECTROLESS NICKEL PLATED	Reusable X Female NPT Straight I.D. x O.D.			
	1/4" - 18 FNPS	3/8" - 18 FNPS	1/2" - 14 FNPS	
	3/16" x 3/8"	N/A	N/A	N/A
	1/4" x 7/16"	H5-H1S-EN	N/A	N/A
	1/4" x 15/32"	H5-H2S-EN	N/A	N/A
	1/4" x 1/2"	H5-H3S-EN	N/A	N/A
	1/4" x 9/16"	H5-H5S-EN	N/A	N/A
	1/4" x 5/8"	H5-H7S-EN	N/A	N/A
	5/16" x 9/16"	H5-E5S-EN	N/A	N/A
	5/16" x 5/8"	H5-E7S-EN	N/A	N/A
	3/8" x 5/8"	H5-J7S-EN	H8-J7S-EN	N/A
	3/8" x 11/16"	H5-J9S-EN	H8-J9S-EN	N/A
	3/8" x 3/4"	H5-J11-EN	H8-J11S-EN	N/A
	1/2" x 13/16"	N/A	N/A	H10-K13S-EN
	1/2" x 7/8"	N/A	N/A	H10-K15S-EN
	1/2" x 15/16"	N/A	N/A	H10-K17S-EN

Hose Splicers

BRASS	Reusable Hose Splicers I.D. x O.D.		
	Catalog	Numbers	
	1/4" x 7/16"	HS-H1	N/A
	1/4" x 15/32"	HS-H2	N/A
	1/4" x 1/2"	HS-H3	N/A
	1/4" x 9/16"	HS-H5	N/A
	1/4" x 5/8"	HS-H7	N/A
	3/8" x 5/8"	N/A	HS-J7
	3/8" x 11/16"	N/A	HS-J9
	3/8" x 3/4"	N/A	HS-J11

BRASS CHROME PLATED	Reusable Hose Splicers I.D. x O.D.		
	Catalog	Numbers	
	1/4" x 7/16"	HS-H1-C*	N/A
	1/4" x 15/32"	HS-H2-C*	N/A
	1/4" x 1/2"	HS-H3-C*	N/A
	1/4" x 9/16"	HS-H5-C*	N/A
	1/4" x 5/8"	HS-H7-C*	N/A
	3/8" x 5/8"	N/A	HS-J7-C*
	3/8" x 11/16"	N/A	HS-J9-C*
	3/8" x 3/4"	N/A	HS-J11-C*

ELECTRO-LESS NICKEL PLATED	Reusable Hose Splicers I.D. x O.D.		
	Catalog	Numbers	
	1/4" x 7/16"	HS-H1-EN	N/A
	1/4" x 15/32"	HS-H2-EN	N/A
	1/4" x 1/2"	HS-H3-EN	N/A
	1/4" x 9/16"	HS-H5-EN	N/A
	1/4" x 5/8"	HS-H7-EN	N/A
	3/8" x 5/8"	N/A	HS-J7-EN
	3/8" x 11/16"	N/A	HS-J9-EN
	3/8" x 3/4"	N/A	HS-J11-EN


Reusable Hose Fittings
Hofmann reusable hose fittings are strong, efficient, and easy to use. They come in two parts and are sold as assemblies. The stem has either a male or female pipe thread on one end. The other end has a tapered stem to fit inside the hose. The ferrule acts as a collar against which the hose is compressed when assembly is made. This connection fits firmly to the end of the hose, yet is removable and reusable on new hose when the old hose is discarded. Component parts are machined from solid brass rod.




Tees, Elbows & Bulkhead Fittings 1/8" - 1/2"




Male Adapters


	Male Thread MNPSM X MNPT	Brass	Electroless Nickel	Chrome Plated
	1/4"-18 X 1/8" MNPT	H5-1M	H5-1M-EN	H5-1M-C*
	1/4"-18 X 1/4" MNPT	H5-2M	H5-2M-EN	H5-2M-C*
	1/4"-18 X 3/8" MNPT	H5-3M	H5-3M-EN	H5-3M-C*
	3/8"-18 X 1/4" MNPT	H8-2M	H8-2M-EN	H8-2M-C*
	3/8"-18 X 3/8" MNPT	H8-3M	H8-3M-EN	H8-3M-C*
	3/8"-18 X 1/2" MNPT	H8-4M	H8-4M-EN	H8-4M-C*
	1/2"-14 X 3/8" MNPT	H10-3M	H10-3M-EN	H10-3M-C*
1/2"-14 X 1/2" MNPT	H10-4M	H10-4M-EN	H10-4M-C*	


Pipe to Pipe

	Male Thread MNPT	Brass	Electroless Nickel	Chrome Plated	Stainless Steel
	1/8" x 1/8"	HT2E1	HT2E1-EN	HT2E1-C*	HT2E1-SS
	1/8" x 1/4"	HT2E2	HT2E2-EN	HT2E2-C*	HT2E2-SS
	1/4" x 1/4"	HT2E3	HT2E3-EN	HT2E3-C*	HT2E3-SS
	1/4" x 3/8"	HT2E4	HT2E4-EN	HT2E4-C*	HT2E4-SS
	3/8" x 3/8"	HT2E5	HT2E5-EN	HT2E5-C*	HT2E5-SS
	3/8" x 1/2"	HT2E6	HT2E6-EN	HT2E6-C*	HT2E6-SS
1/2" x 1/2"	HT2E7	HT2E7-EN	HT2E7-C*	HT2E7-SS	


Angles & Tees


	Street Elbows Thread X Elbow	Brass	Electroless Nickel	Chrome Plated	Stainless Steel
	1/8" FNPT X 1/8" MNPT X 90 DEGREE	H16	H16-EN	H16-C*	H16-SS
	1/4" FNPT X 1/4" MNPT X 90 DEGREE	H17	H17-EN	H17-C*	H17-SS
3/8" FNPT X 3/8" MNPT X 90 DEGREE	H20	H20-EN	H20-C*	H20-SS	

	Street Elbows Thread X Elbow	Brass	Electroless Nickel	Chrome Plated
	1/8" FNPT X 1/8" MNPT X 45 DEGREE	H18	H18-EN	H18-C*
1/4" FNPT X 1/4" MNPT X 45 DEGREE	H19	H19-EN	H19-C*	

	Thread	Brass	Electroless Nickel Plated	Chrome Plated	Stainless Steel
	1/8" FNPT X 1/8" FNPT X 1/8" MNPT	T19	T19-EN	T19-C*	N/A
	1/8" FNPT X 1/8" FNPT X 1/8" FNPT	T1	T1-EN	T1-C*	T1-SS
1/4" FNPT X 1/4" FNPT X 1/4" FNPT	T2	T2-EN	T2-C*	T2-SS	

Reusable Bulkhead

	Hose I.D. x O.D.	Tube O.D.	Brass	Electroless Nickel Plated	Chrome Plated	Stainless Steel
	3/16" x 3/8"	1/4"	H1-AT	H1-AT-EN	H1-AT-C	H1-AT-SS
	1/4" x 7/16"	1/4"	N/A	N/A	N/A	H2-AT-SS
	1/4" x .470"	1/4"	N/A	N/A	N/A	H22-AT-SS
3/16" x 3/8"	3/8"	N/A	N/A	N/A	H3-AT-SS	





Sleeve Valves, Lockouts, Blow Guns & Accessories

	Valve Part #	MPNT X FNPT Thread	Lockout Part #
	3W1	1/8"	LO1
	3W2	1/4"	LO2
	3W3	3/8"	LO3
	3W4	1/2"	LO4

Performance Data		
NPT	100 PSIG	80 PSIG
1/8"	16	14.5
1/4"	40	36
3/8"	65	59
1/2"	140	127

Provides low cost ON-OFF Exhaust operation.
 Slide the sleeve to ON position. Exhaust ports are closed, valve is open.
 Reversing the sleeve opens the exhaust ports and shuts off flow.
 Valve with lockout complies with OSHA Standard 29 CFR, PART 1910


Working Pressure: to 200 PSIG
Temperature: -25 to +200°F

Blow Guns

	Lever	Button	Nickel Plated-Lever
	BGL-30	BG-30	BGL-30-N
	BGL-30TP	BG-30TP	BGL-30TP-N

Blow guns are available with our standard safety tip or threaded safety tip.
 Each gun can be ordered with a pressed tip which is not removable, or the threaded tip that is 1/8" MNPT.

Inlet Pressure: 150 PSIG Max
Temperature: 32-180°F
Body: Diecast Zinc
Seal: Buna-N
Inlet: 1/4" FPT
Flow: Safety Tip: 19.8 CFM @ 100 PSIG
 Standard Tip: 9.3 CFM @ 100 PSIG

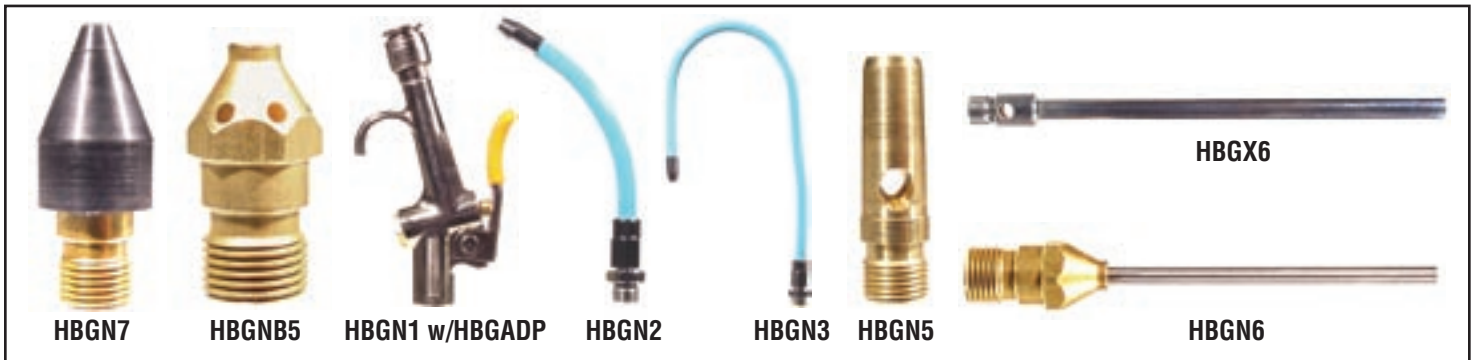

Complete Gun	Nozzle Only	Description	Performance		
			Flow CFM	Outlet Blocked	Noise Level dbA
HBGL21	HBGN1	Standard nozzle, general blowing and drying applications	17.5	20.0	89.5
HBGL2B5	HBGNB5	Air screen nozzle reduces chip flyback	5.0	18.0	85.0
HBGL25	HBGN5	High flow safety nozzle for general dusting and chip removal	20.0	20.0	89.0
HBGL26**	HBGN6	Needle tip nozzle for fine flow and small holes	(**)		
HBGL27**	HBGN7	Rubber tipped nozzle for delicate surfaces and for blowing out fluid lines	(**)		
HBGL2X3	HBGX3	3" Extension nozzle for extending reach	15.0	21.0	85.5
HBGL2X6	HBGX6	6" Extension nozzle for extending reach	14.1	22.0	84.0
HBGL2X12	HBGX12	12" Extension nozzle for extending reach	13.3	24.0	85.5
	HBGN2	Flexible extension nozzle (4 inch)			
	HBGN3	Flexible extension nozzle (12 inch)			
	HBGADP	Quick disconnect adapter allows users to switch nozzles easily			
HBGLKT-30		Quick disconnect blow gun with tips, plastic case includes, HBGNB5, HBGN6, HBGX6, HBGN5, HBGN7, HBGN1, HBGADP			



Flex Braid and Synflex Hose

	Part #	I.D. x O.D.	Please add suffix to end of part # for color desired -RD (Red) -BK (Black) -GN (Green) -BL (Blue) -YW (Yellow) -GR (Grey) -CL (Clear)
	3/16" ID-()FBH	3/16" x 3/8"	
	3630-04-()	1/4" x .470"	
	3630-06-()	3/8" x 5/8"	
	3630-08-()	1/2" x 13/16"	

Features

Compounds used made from materials on the FDA approved list. PVC tube, polyester reinforced braid, vinyl cover. Light weight, non marking and flexible. Tight tolerances.

Applications

Air, water and food transfer. Light vacuum lines.

Polyethylene Tubing

	Part #	I.D. x O.D.	Wall Thickness	Working temperature: 230 PSI at 70 degrees 60 PSI at 180 degrees	Please add suffix to end of part # for color desired -N (Natural) -RD (Red) -BK (Black) -GN (Green) -BL (Blue) -YW (Yellow)
	1/4 PE-()	1/4" x .170"	0.04"		
	3/8 PE-()	3/8" x .275"	0.05"		
	1/2 PE-()	1/2" x .375"	.0625"		

Features

Polyethylene tubing is produced in a linear low density polyethylene. It provides the benefit of wide temperatures and pressures. Broad chemical compatibility and made from a non-contaminating material.

Applications

Water purification, water conditioners, ice makers, and misting systems. Can use with chemicals or potentially aggressive fluids.

Nylon Tubing

	Part #	I.D. x O.D.	Wall Thickness	Temperature range: -40 degrees to 225 degrees	Please add suffix to end of part # for color desired -N (Natural) -BK (Black)
	1/4 NY-()	1/4" x .180"	0.04"		
	3/8 NY-()	3/8" x .275"	0.05"		
	1/2 NY-()	1/2" x .375"	.0625"		

Features

Excellent resistance to a wide range of chemicals including oils, gasoline, hydraulic fluids, salt solutions, and bases.

Nylon tubing also provides very low moisture absorption, good mechanical properties.

Applications

Flexible nylon tubing is used for air and lubrication lines, low pressure hydraulic lines, instrumentation, and process lines for chemicals and solvents.

Polyurethane Tubing

	Part #	I.D. x O.D.	Wall Thickness	Please add suffix to end of part # for color desired -RD (Red) -BK (Black) -GN (Green) -BL (Blue) -YW (Yellow) -CL (Clear)
	1/4 PU-()	1/4" x .180"	0.045"	
	3/8 PU-()	3/8" x .275"	0.057"	
	1/2 PU-()	1/2" x .375"	0.062"	

Features

Polyurethane tubing is made at 85 durometer for use in push in fittings. The polyurethane is very abrasion and kink resistant and yet is lightweight and extremely durable and keeps its flexibility even in cold weather.

Applications

Polyurethane tubing can be used in a number of different applications including medical, industrial, robotics, food processing and water washdown systems.



Safety Guides

SAFETY GUIDE FOR SELECTING AND USING QUICK ACTION COUPLINGS AND RELATED ACCESSORIES

DANGER: Failure of improper selection or improper use of quick action couplings or related accessories can cause death, personal injury and property damage. Possible consequences of failure or improper selection or improper use of quick action couplings or related accessories include but are not limited to:

- Couplings or parts thrown off at high speed.
- High velocity fluid discharge.
- Explosion or burning of the conveyed fluid.
- Contact with suddenly moving or falling objects that are to be held in position or moved by the conveyed fluid.
- Dangerously whipping hose.
- Contact with conveyed fluids that may be hot, cold, toxic, or otherwise injurious.
- Sparking or explosion while paint or flammable liquid spraying.

BEFORE SELECTING OR USING ANY HOFMANN QUICK ACTION COUPLINGS OR RELATED ACCESSORIES, IT IS IMPORTANT THAT YOU READ AND FOLLOW THE FOLLOWING INSTRUCTIONS:

A. GENERAL INSTRUCTIONS

A.1 SCOPE: This safety guide provides instructions for selecting and using (including installing connection, disconnecting, and maintaining) quick action couplings and related accessories (including caps, plugs, blow guns, and two way valves). This safety guide is a supplement to and is to be used with the specific Hofmann Publications for the specific quick action couplings and related accessories that are being considered for use.

A.2 FAIL SAFE: Quick action couplings or the hose they are attached to can fail without warning for many reasons. Design all systems and equipment in a fail-safe mode so that failure of the quick action coupling or hose will not endanger persons or property.

A.3 DISTRIBUTION: Provide a copy of the safety guide to each person that is responsible for selection or using quick action coupling products. Do not select or use quick action couplings without thoroughly reading and understanding this safety guide as well as the specific Hofmann Publications for the products considered or selected.

A.4 USER RESPONSIBILITY: Due to the wide variety of operating conditions and uses for quick action couplings, Hofmann and its distributors do not represent or warrant that any particular quick action environment (that is, surrounding conditions) to which they are coupled is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:

- Making the final selection of the quick action couplings.
- Assuring that the user's requirements are met and that the use presents no health or safety hazards.
- Providing all appropriate health and safety warnings on the equipment on which the quick action couplings are used.

A.5 ADDITIONAL QUESTIONS: Call Hofmann if you have any questions or require any additional information.

B. QUICK ACTION COUPLING SELECTION INSTRUCTIONS:

B.1 PRESSURE: Quick action couplings selection must be made so that the published rated pressure of the coupling is equal to or greater than the maximum system pressure. Surge pressures in the system higher than the rated pressure of the coupling will shorten the quick action coupling's life. Do not confuse burst pressure or other pressure valves for this purpose.

B.2 FLUID COMPATABILITY: Quick action couplings selection must assure compatibility of the body and seal materials with the fluid media used. See the fluid compatibility chart in the Hofmann Publication for the product being considered or used.

B.3 TEMPERATURE: Be certain that fluid and ambient temperatures, both steady and transient, do not exceed the limitations of the quick action couplings. Use caution and hand protection when connecting or disconnecting quick action couplings that are heated or cooled by the media they are conducting or by their environment.

B.4 SIZE: Transmission or power by means of pressurized liquid carries with pressure and rate of flow. The size of the quick action couplings and other components of the system must be adequate to keep pressure losses to a minimum and avoids damage due to heat generation or excessive fluid velocity.

B.5 PRESSURIZED CONNECT OR DISCONNECT: If connection or disconnection under pressure is a requirement, use only quick action couplings designed for that purpose. The rated operating pressure of a quick action coupling may not be the pressure at which it may be safely connected or disconnected.

B.6 ENVIRONMENT: Care must be taken to ensure that quick couplings are either compatible with or protected from the environment to which they are exposed. Environmental conditions including but not limited to ultraviolet radiation, ozone, moisture, water, salt water, chemicals, and air pollutants can cause degradation and premature failure.

B.7 LOCKING MEANS: Ball locking quick action couplings can unintentionally disconnect if they are dragged over obstructions on the end of a hose or if the sleeve is bumped or moved enough to cause disconnect. Sleeves designed with flanges to provide better gripping for oily or gloved hands are especially susceptible to accidental disconnect and should not be used where these conditions exist. Sleeve lock or union (threaded) sleeve designs should be considered where there is a potential for accidental uncoupling.

B.8 MECHANICAL LOADS: External forces can significantly reduce quick action couplings' life of cause failure. Mechanical loads which must be considered include excessive tensile or side loads, and vibration. Unusual applications may require special testing prior to quick action couplings selection.


B.9 SPECIFICATIONS AND STANDARDS: When selecting quick action couplings government, industry, and Hofmann specifications must be reviewed and followed as applicable.

B.10 VACUUM: Not all quick action couplings are suitable or recommended for vacuum service. Quick action couplings used for vacuum applications must be selected to ensure that the quick action couplings will withstand the vacuum and pressure of the system.


Full Size Plug Profiles




A, B, C, D Series (pages 5-8)

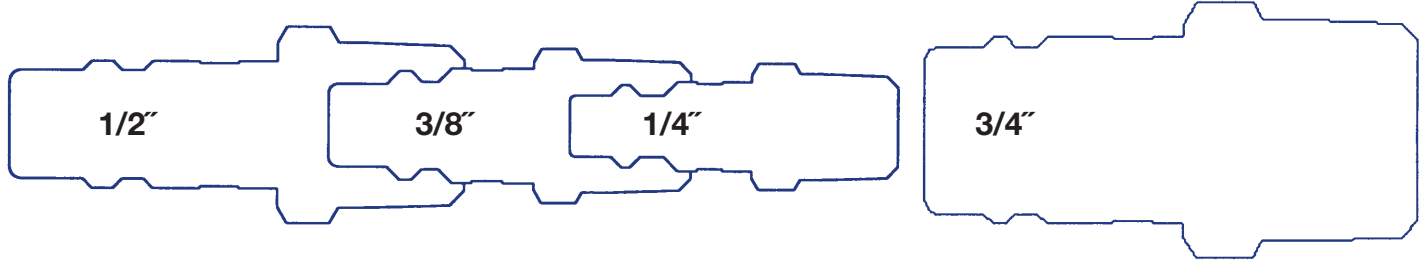


L Series (page 9)

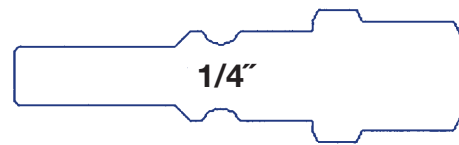

T Series (page 12)

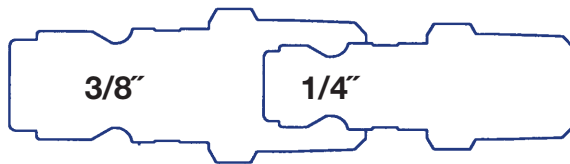


210 and 310 Series (page 9)

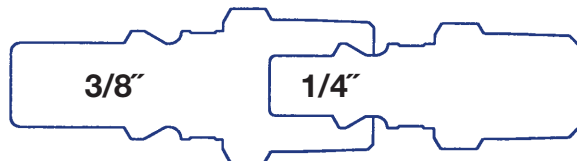




Full Size Plug Profiles


H Series (page 14)

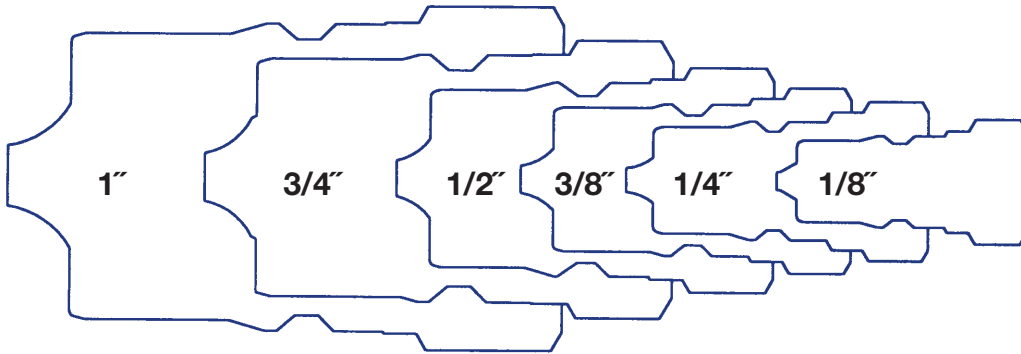


G Series (page 13)

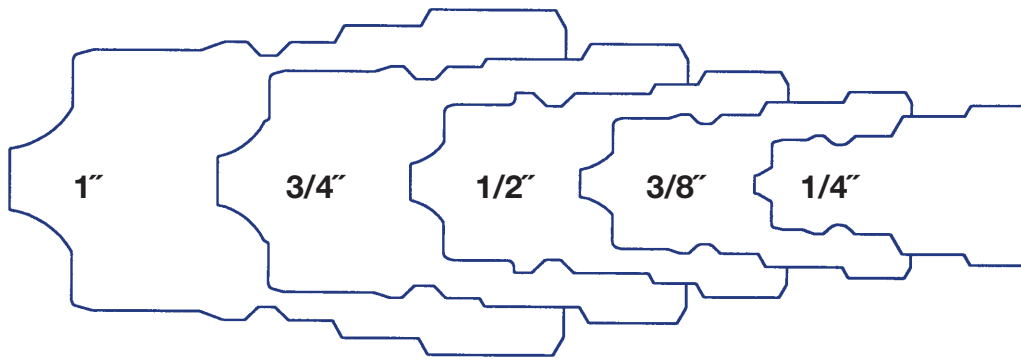

FF Series (page 16)

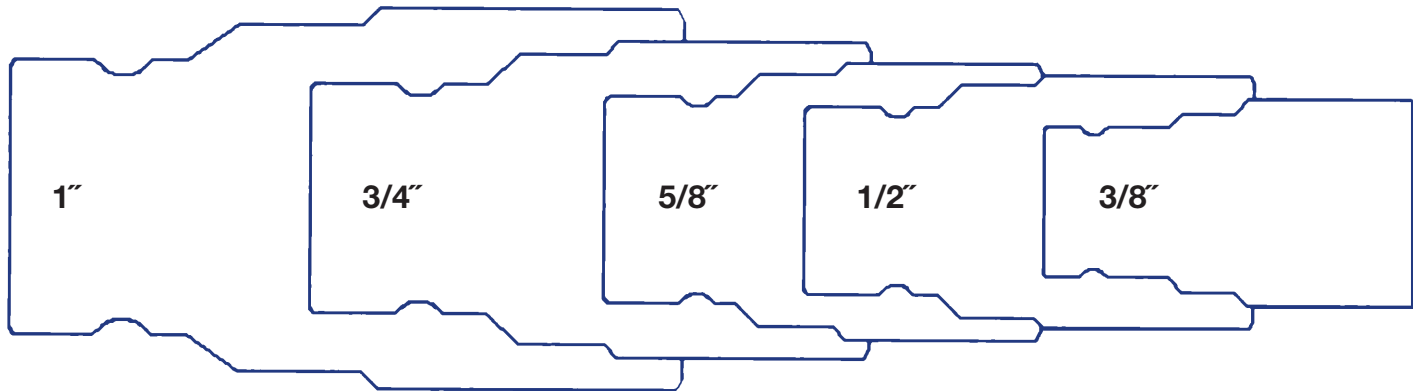

F Series (page 17)

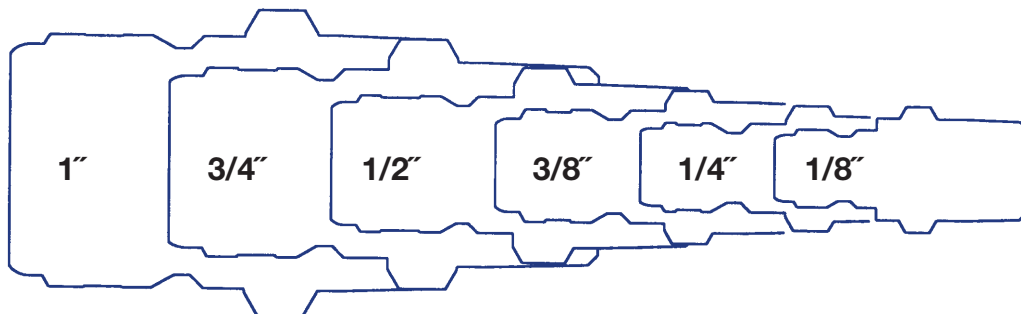

Fluid Compatibility



Media	Body	Seal
Acetic Acid (5%)	SS	VT
Acetone	B, SS	EP
Acetophenone	SS	EP
Acetylene	SS	Std
Air (up to 200°F)	B, SS	Std
Air (up to 400°F)	B, SS	VT,SI
Ammonia (Anhydrous)	SS	NE
Ammonia (Cold, Gas)	SS	EP
Ammonium Nitrite	SS	Std
Amyl Chloride	SS	VT
Arsenic Acid	SS	Std
Asphalt	SS	VT
Brine (Sodium Chloride)	SS	Std
Butane	SS	Std
Butanol (Butyl Alcohol)	SS	Std
Calcium Acetate	B, STD	EP
Carbon Dioxide	B, SS	Std
Carbon Tetrachloride	B	VT
Castor Oil	B, STD, SS	Std
China Wood Oil (Tung Oil)	SS	Std
Chloroform	SS	VT
Corn Oil	B, STD, SS	Std
Creosote	SS	Std
Crude Oil	SS	VT
Cutting Oil	STD, SS	Std
Detergent, Water Solution	SS	Std
Diesel Fuel	B,SS	Std
Diethylene Glycol	STD, SS	Std
Dimethyl Formamide	SS	EP
Ethanol	B	EP
Freon 11	B	VT
Freon 12	B, STD, SS	NE
Freon 22	B,SS	NE
Freon R134a	B, STD, SS	NE
Fuel Oil	SS	Std
Gas, Liquid Propane (LPG)	B, SS	Std
Gas, Natural	B, SS	Std
Gasoline (unleaded)	B, SS	VT
Glucose	B, STD, SS	Std
Glycerine (Glycercol)	STD, SS	Std
Glycols	STD, SS	Std
Helium	B, STD, SS	Std
Heptane	B, STD, SS	Std
Hydraulic Oil (Petroleum Base)	B, STD, SS	Std
Hydraulic Oil (Water Base)	STD, SS	EP
Hydrazine	SS	EP
Hydrogen Gas	B, STD, SS	Std
Isobutyl Alcohol	SS	VT
Isopropyl Alcohol	B, STD, SS	VT
Isopropyl Ether	B, STD, SS	Std
Isocyanate	STD	VT
Kerosene	B, SS	Std
Linseed Oil	STD, SS	Std
Lubricating Oil (SAE 10, 20, 30, 40, 50)	B, STD, SS	Std
Mercury	SS	Std
Methane	B, SS	Std
Methanol	B, SS	Std
Methyl Bromide	STD, SS	VT
Methyl Chloride (wet)	B	VT
Methyl Ethyl Ketone (MEK)	B, STD, SS	EP
Mineral Oils	B, STD, SS	Std

Media	Body	Seal
Potassium Acetate	STD	EP
Potassium Dichromate	STD	Std
Potassium Nitrate	STD, SS	Std
Potassium Sulfate	SS	Std
Propane	B, SS	Std
Propyl Alcohol	B, STD, SS	Std
Propylene	B, STD, SS	VT
Pydraul 10E	STD, SS	EP
Pydraul A-200, C-Series	STD, SS	VT
Pydraul, 3 Series	STD, SS	VT
Sea Water (salt water)	SS	Std
Silicone Greases	B, STD, SS	Std
Skydrol 500, Type 2	STD, SS	EP
Skydrol 7000, type 2	STD, SS	EP
Soap Solutions	SS	Std
Sodium Acetate	B, STD, SS	EP
Sodium Carbonate (Soda Ash)	STD, SS	Std
Sodium Cyanide	STD, SS	Std
Sodium Metaphosphate	STD	Std
Sodium Nitrate	SS	EP
Sodium Perborate	SS	VT
Sodium Peroxide	STD	VT
Sodium Phosphates	B, SS	Std
Sodium Sulfate	SS	Std
Soybean Oil	STD, SS	Std
Steam (below 400°F)	B, SS	EP
Sucrose Solutions	B, STD, SS	Std
Tannic Acid (10%)	B	Std
Tertiary Butyl Alcohol	B, STD, SS	VT
Tetraethyl Lead	B, STD, SS	VT
Tetraethyl Lead (blend)	B, STD, SS	VT
Titanium Tetrachloride	STD	VT
Toluene	B, STD, SS	VT
Transmission Fluid (Type A)	B, STD, SS	Std
Turbine Oil #15	SS	VT
Turpetine	SS	Std
Varnish	B, STD, SS	VT
Water (below 100°F)	B, SS	Std
Water (above 100°F)	B, SS	EP
Xylene	B, SS	VT
Naphtha	STD	VT
Napthalene	STD	VT
Napthenic Acid	STD	VT
Nickel, Acetate	SS	EP
Nickel Sulfate	SS	Std
Nitrogen	B, STD, SS	Std
Nitrous Oxide	SS	Std
Octyl Alcohol	B, STD, SS	VT
Oxalic Acid	SS	VT
Oxygen (200-400°F)	B, SS	VT
Oxygen (below 200°F)	B, SS	Std
Ozone	SS	VT
Palmitic Acid	B, SS	Std
Para-Dichlorobenzene	STD	VT
Peanut Oil	STD, SS	Std
Petrolatum	B, STD, SS	Std
Petroleum Oil (below 200°F)	B, STD, SS	Std
Phenol	B, STD, SS	VT
Phosphorous Trichloride	SS	VT
Plating Solutions (Chrome)	B, SS	VT
Plating Solutions (other)	SS	VT

Glossary

SS = 303SS
 B = Brass
 STD = Brass & Steel
 VT = Viton
 EP = Ethylene Propylene
 STD = Buna Seal
 SI = Silicone

Disclaimer: This data is only to be used as a guideline, please test individual parts thoroughly for each application.



Alpha Numeric Product Listing

Product Number	Page
1/2 NY-BK	27
1/2 NY-N	27
1/2 PE-BK	27
1/2 PE-BL	27
1/2 PE-N	27
1/2 PE-RD	27
1/2 PE-YW	27
1/2 PE-GN	27
1/2 PU-BK	27
1/2 PU-BL	27
1/2 PU-CL	27
1/2 PU-GN	27
1/2 PU-RD	27
1/2 PU-YW	27
1/4 NY-BK	27
1/4 NY-N	27
1/4 PE-BK	27
1/4 PE-BL	27
1/4 PE-N	27
1/4 PE-RD	27
1/4 PE-YW	27
1/4 PE-GN	27
1/4 PU-BK	27
1/4 PU-BL	27
1/4 PU-CL	27
1/4 PU-GN	27
1/4 PU-RD	27
1/4 PU-YW	27
10GP	13
10GS	13
10HP	14
10HPB	14
10HP-SS	14
10HS	14
10HSB	14
10HS-SS	14
12GP	13
12GS	13
12HP	14
12HPB	14
12HP-SS	14
12HS	14
12HSB	14
12HS-SS	14
1BPB	17
1BP-SS	17
1BS	17
1BS-SS	17
1DCM	14
1DPM	14
1FB	17
1FMB	17
1FM-SS	17
1FPB	17
1FPMB	17
1FPMS	17
1FPM-SS	17
1FPS	17
1FP-SS	17
1F-SS	17
1HP	14
1HPB	14
1HP-SS	14
1HS	14
1HSB	14
1HS-SS	14
20GP	13

Product Number	Page
20GS	13
210-FA1	9
210-FA1-SS	9
210-FA2	9
210-FA2-SS	9
210-FA3	9
210-FA3-SS	9
210-FPA2	9
210-FPA2-SS	9
210-FPA3	9
210-MA1	9
210-MA1-SS	9
210-MA2	9
210-MA2-SS	9
210-MA3	9
210-MA3-SS	9
210-MPA1	9
210-MPA2	9
210-MPA2-SS	9
210-MPA3	9
210-RKA1	9
210-RKA15	9
210-RKA2	9
210-RKA25	9
210-RKA27	9
210-RKA3	9
210-RKA37	9
210-RKA38	9
210-SA2	9
210-SA25	9
210-SA2-PL	9
210-SA3	9
210-SA3-PL	9
210-SA3-SS	9
210-SPA2	9
210-SPA25	9
210-SPA2-PL	9
210-SPA3	9
2BPB	17
2BPB-SS	17
2BS	17
2DCM	14
2DPM	14
2FB	17
2FMB	17
2FM-SS	17
2FPB	17
2FPMB	17
2FPMS	17
2FPM-SS	17
2FPS	17
2FP-SS	17
2F-SS	17
2GP	13
2GS	13
2HP	14
2HPB	14
2HP-SS	14
2HS	14
2HSB	14
2HS-SS	14
3/16 FBH BK 500	27
3/16 FBH BL 500	27
3/16 FBH GN 500	27
3/16 FBH GR 500	27
3/16 FBH RD 500	27

Product Number	Page
3/16 FBH YW 500	27
3/16 ID-BK CL 500	27
3/16 ID-BK-FBH	27
3/16 ID-BL-FBH	27
3/16 ID-CL-FBH	27
3/16 ID-GN-FBH	27
3/16 ID-GR-FBH	27
3/16 ID-RD-FBH	27
3/16 ID-YW-FBH	27
3/8 NY-BK	27
3/8 NY-N	27
3/8 PE BK	27
3/8 PE-BL	27
3/8 PE-N	27
3/8 PE-RD	27
3/8 PE-YW	27
3/8 PU-BK	27
3/8 PU-BL	27
3/8 PU-CL	27
3/8 PU-GN	27
3/8 PU-RD	27
3/8 PU-YW	27
310-FB2	9
310-FB3	9
310-FB4	9
310-FPB3	9
310-MB2	9
310-MB3	9
310-MB4	9
310-MPB3	9
310-RKB15	9
310-RKB2	9
310-RKB3	9
310-RKB37	9
310-RKB38	9
310-SB2	9
310-SB25	9
310-SB3	9
310-SB3-PL	9
310-SB4	9
310-SB4-PL	9
310-SPB3	9
310-SPB4	9
3630-04 BK	27
3630-04 GN	27
3630-04 CL	27
3630-04 BL	27
3630-04 GR	27
3630-04 RD	27
3630-04 YW	27
3630-06 BL	27
3630-06 GR	27
3630-06 BK	27
3630-06 GN	27
3630-06 YW	27
3630-06 CL	27
3630-06 RD	27
3630-08 RD	27
3630-08 BK	27
3630-08 GN	27
3630-08 BL	27
3630-08 YW	27
3630-08 CL	27
3630-08 GR	27
3630-08 RD	27
3BPB	17

Product Number	Page
3BPS	17
3BS	17
3DCM	14
3DPM	14
3FB	17
3FMB	17
3FM-SS	17
3FPB	17
3FPMB	17
3FPMS	17
3FPM-SS	17
3FPS	17
3FP-SS	17
3F-SS	17
3GP	13
3GS	13
3HP	14
3HPB	14
3HP-SS	14
3HS	14
3HSB	14
3HS-SS	14
3W1	26
3W2	26
3W3	26
3W4	26
4BPB	17
4BPS	17
4BS	17
4DCM	14
4DPM	14
4FB	17
4FMB	17
4FM-SS	17
4FPB	17
4FPMB	17
4FPMS	17
4FPM-SS	17
4FPS	17
4FP-SS	17
4F-SS	17
4GP	13
4GS	13
4HP	14
4HPB	14
4HP-SS	14
4HS	14
4HSB	14
4HS-SS	14
6BPB	17
6BPS	17
6DCM	14
6DPM	14
6FB	17
6FMB	17
6FM-SS	17
6FPB	17
6FPMB	17
6FPMS	17
6FPM-SS	17
6FPS	17
6FP-SS	17
6FP-SS	17
6GP	13
6GS	13
6HP	14
6HPB	14

Product Number	Page
6HP-SS	14
6HS	14
6HSB	14
6HS-SS	14
8BPB	17
8BPS	17
8BS	17
8DCM	14
8DPM	14
8FB	17
8FMB	17
8FM-SS	17
8FPB	17
8FPMB	17
8FPMS	17
8FPM-SS	17
8FPS	17
8FP-SS	17
8F-SS	17
8GP	13
8GS	13
8HP	14
8HPB	14
8HP-SS	14
8HS	14
8HSB	14
8HS-SS	14
A VALVE SPRING	8
B VALVE SPRING	8
B001	22
B001-EN	22
B001-S6	22
B001-SS	22
B002	22
B002-EN	22
B002-SS	22
B101	22
B101-90	22
B101-90-EN	22
B101-EN	22
B101-S6	22
B101-SS	22
B102	22
B102-EN	22
B102-S6	22
B102-SS	22
B201	22
B201-45	22
B201-45-EN	22
B201-90	22
B201-90-EN	22
B201-EN	22
B201-PL	22
B201-PL-90	22
B201-PL-90-EN	22
B201-PL-EN	22
B201-PL-SS	22
B201-S6	22
B201-SS	22
B202	22
B202-45	22
B202-45-EN	22
B202-90	22
B202-90-EN	22
B202-EN	22
B202-PL	22
B202-PL-90	22

Alpha Numeric Product Listing



Product Number	Page
B202-PL-90-EN	22
B202-PL-EN	22
B202-PL-SS	22
B202-PL-SW	22
B202-PL-SW-EN	22
B202-S6	22
B202-SS	22
B202-SW	22
B202-SW-EN	22
B203	22
B203-90	22
B203-90-EN	22
B203-EN	22
B203-S6	22
B203-SS	22
B301	22
B301-45	22
B301-45-EN	22
B301-90	22
B301-90-EN	22
B301-EN	22
B301-SS	22
B301-S6	22
B302	22
B302-45	22
B302-45-EN	22
B302-90	22
B302-90-EN	22
B302-EN	22
B302-PL	22
B302-PL-90	22
B302-PL-90-EN	22
B302-PL-EN	22
B302-PL-SW	22
B302-PL-SW-EN	22
B302-S6	22
B302-SS	22
B302-SW	22
B302-SW-EN	22
B303	22
B303-45	22
B303-45-EN	22
B303-90	22
B303-90-EN	22
B303-EN	22
B303-PL	22
B303-PL-90	22
B303-PL-90-EN	22
B303-PL-EN	22
B303-PL-SS	22
B303-PL-SW	22
B303-PL-SW-EN	22
B303-S6	22
B303-SS	22
B303-SW	22
B303-SW-EN	22
B304	22
B304-EN	22
B304-S6	22
B304-SS	22
B402	22
B402-45	22
B402-45-EN	22
B402-90	22
B402-90-EN	22
B402-EN	22
B402-S6	22

Product Number	Page
B402-SS	22
B403	22
B403-45	22
B403-45-EN	22
B403-90	22
B403-90-EN	22
B403-EN	22
B403-PL	22
B403-PL-90	22
B403-PL-90-EN	22
B403-PL-EN	22
B403-PL-SW	22
B403-PL-SW-EN	22
B403-S6	22
B403-SS	22
B403-SW	22
B403-SW-EN	22
B404	22
B404-45	22
B404-45-EN	22
B404-90	22
B404-90-EN	22
B404-EN	22
B404-PL	22
B404-PL-90	22
B404-PL-90-EN	22
B404-PL-EN	22
B404-PL-SS	22
B404-PL-SW	22
B404-PL-SW-EN	22
B404-S6	22
B404-SS	22
B404-SW	22
B404-SW-EN	22
B406	22
B406-EN	22
B406-S6	22
B501	22
B501-90	22
B501-90-EN	22
B501-EN	22
B501-S6	22
B502	22
B502-90	22
B502-90-EN	22
B502-EN	22
B502-S6	22
B502-SS	22
B503	22
B503-90	22
B503-90-EN	22
B503-EN	22
B503-S6	22
B503-SS	22
B604	22
B604-90	22
B604-90-EN	22
B604-EN	22
B604-S6	22
B604-SS	22
B606	22
B606-90	22
B606-90-EN	22
B606-EN	22
B606-S6	22
B606-SS	22
B606-SW	22

Product Number	Page
B606-SW-EN	22
B808	22
B808-90	22
B808-90-EN	22
B808-EN	22
BG-30	26
BGL-30	26
BGL-30-N	26
BGL-30TP	26
BG-30TP	26
BGL-30TP-N	26
C VALVE SPRING	8
D VALVE SPRING	8
F1-M	3
F1-M-C	3
F1-M-EN	3
F1-M-SS	3
F1-MST	4
F1-MST-C	4
F1-MST-EN	4
F1-MST-SS	4
F201-PL	22
F201-PL-EN	22
F202-PL	22
F202-PL-EN	22
F2-M-EN	3
F2-MST-EN	4
F302-PL	22
F302-PL-EN	22
F303-PL	22
F303-PL-EN	22
F403-PL	22
F403-PL-EN	22
F404-PL	22
F404-PL-EN	22
FA1	5
FA1-B	5
FA1-BC	5
FA1-EN	5
FA1-SG	5
FA1-SS	5
FA2	5
FA2-B	5
FA2-BC	5
FA2-EN	5
FA2-SG	5
FA2-SS	5
FA3	5
FA3-B	5
FA3-BC	5
FA3-EN	5
FA3-SG	5
FA3-SS	5
FB2	6
FB2-B	6
FB2-BC	6
FB2-EN	6
FB2-SS	6
FB3	6
FB3-B	6
FB3-BC	6
FB3-EN	6
FB3-SG	6
FB3-SS	6
FB4	6
FB4-B	6
FB4-BC	6

Product Number	Page
FB4-EN	6
FB4-SG	6
FB4-SS	6
FC3	7
FC3-B	7
FC3-BC	7
FC3-EN	7
FC3-SS	7
FC4	7
FC4-B	7
FC4-BC	7
FC4-EN	7
FC4-SG	7
FC4-SS	7
FC5	7
FC5-B	7
FC5-BC	7
FC5-EN	7
FD4-Q	8
FD5-Q	8
FD6-Q	8
FF10HP	16
FF10HP-SS	16
FF10HS	16
FF10HS-SS	16
FF12HP	16
FF12HP-SS	16
FF12HS	16
FF12HS-SS	16
FF1HP	16
FF1HS	16
FF2DCM	16
FF2DPM	16
FF2HP	16
FF2HS	16
FF34HP	16
FF34HS	16
FF3DCM	16
FF3DPM	16
FF3HP	16
FF3HS	16
FF46HP	16
FF46HS	16
FF4DCM	16
FF4DPM	16
FF4HP	16
FF4HS	16
FF6DCM	16
FF6DPM	16
FF6HP	16
FF6HS	16
FF8DCM	16
FF8DPM	16
FF8HP	16
FF8HS	16
FP1-M	3
FP1-M-C	3
FP1-M-EN	3
FP1-M-SS	3
FP1-MST	4
FP1-MST-C	4
FP1-MST-EN	4
FP1-MST-SS	4
FP1-MV	3
FP1-MV-C	3
FP1-MV-EN	3
FP1-MV-SS	3

Product Number	Page
FP2-M-EN	3
FP2-MST-EN	4
FP2-MV-EN	3
FPA1	5
FPA1-B	5
FPA1-BC	5
FPA1-EN	5
FPA1-SS	5
FPA2	5
FPA2-B	5
FPA2-BC	5
FPA2-EN	5
FPA2-SS	5
FPA3	5
FPA3-SS	5
FPB2	6
FPB2-SS	6
FPB3	6
FPB3-SS	6
FPB4	6
FPB4-SS	6
FPC3	7
FPC3-SS	7
FPC4	7
FPC4-SS	7
FPC5	7
FPD4	8
FPD5	8
FPD6	8
G2DCM	13
G2DPM	13
G3DCM	13
G3DPM	13
G4DCM	13
G4DPM	13
G6DCM	13
G6DPM	13
G8DCM	13
G8DPM	13
H10-3M	25
H10-3M-C	25
H10-3M-EN	25
H10-4M	25
H10-4M-C	25
H10-4M-EN	25
H10-K13S	24
H10-K13S-C	24
H10-K13S-EN	24
H10-K15S	24
H10-K15S-C	24
H10-K15S-EN	24
H10-K17S	24
H10-K17S-C	24
H10-K17S-EN	24
H1162X4	21
H1162X4-SS	21
H1162X6	21
H1162X6-SS	21
H1162X8	21
H1162X8-SS	21
H1164X4	21
H1164X4-SS	21
H1164X6	21
H1164X6-SS	21
H1164X8	21
H1164X8-SS	21
H1165X4	21



Alpha Numeric Product Listing

Product Number	Page
H1165X4-SS	21
H1165X6	21
H1165X6-SS	21
H1165X8	21
H1165X8-SS	21
H1166X4	21
H1166X4-SS	21
H1166X4X4	21
H1166X4X4-SS	21
H1166X6	21
H1166X6-SS	21
H1166X6X6	21
H1166X6X6-SS	21
H1166X8-SS	21
H1166X8X8-SS	21
H1168X4	21
H1168X4-SS	21
H1168X4X4	21
H1168X4X4-SS	21
H1168X6	21
H1168X6-SS	21
H1168X6X6	21
H1168X6X6-SS	21
H1168X8	21
H1168X8-SS	21
H1168X8X4	21
H1168X8X8	21
H1168X8X8-SS	21
H1169X4S	21
H1169X4S-SS	21
H1169X4X4S	21
H1169X4X4S-SS	21
H1169X6S	21
H1169X6S-SS	21
H1169X6X6S	21
H1169X6X6S-SS	21
H1169X8S	21
H1169X8S-SS	21
H1169X8X4S	21
H1169X8X8S	21
H1169X8X8S-SS	21
H1172X4S	21
H1172X4S-SS	21
H1172X4X4S	21
H1172X4X4S-SS	21
H1172X6S	21
H1172X6S-SS	21
H1172X6X6S	21
H1172X6X6S-SS	21
H1172X8S	21
H1172X8S-SS	21
H1172X8X8S	21
H1172X8X8S-SS	21
H1174X4	21
H1174X4-SS	21
H1174X6	21
H1174X6-SS	21
H1174X8	21
H1174X8-SS	21
H15	25
H15-C	25
H16	25
H16-C	25
H16-EN	25
H16-SS	25
H17	25
H17-C	25

Product Number	Page
H17-EN	25
H17-SS	25
H18	25
H18-C	25
H18-EN	25
H19	25
H19-C	25
H19-EN	25
H1-AA	23
H1-AA-C	23
H1-AA-EN	23
H1-AA-SS	23
H1-AT	25
H1-AT-C	25
H1-AT-EN	25
H1-AT-SS	25
H1-H1	23
H1-H1-C	23
H1-H1-EN	23
H1-H1-SS	23
H1-H2-EN	23
H1-H3	23
H1-H3-C	23
H1-H3-EN	23
H1-H3-SS	23
H1-H5	23
H1-H5-C	23
H1-H5-EN	23
H1-H5-SS	23
H1-H7	23
H1-H7-C	23
H1-H7-EN	23
H1-H7-SS	23
H20	25
H20-C	25
H20-EN	25
H20-SS	25
HH21F	15
HH22F	15
HH22FB	15
HH22M	15
HH22MB	15
H2-AA	23
H2-AA-C	23
H2-AA-EN	23
H2-AA-SS	23
H2-AT-SS	25
H2-E5	23
H2-E5-C	23
H2-E5-EN	23
H2-E7	23
H2-E7-C	23
H2-E7-EN	23
H2-H1	23
H2-H1-C	23
H2-H1-EN	23
H2-H1-SS	23
H2-H2-EN	23
H2-H3	23
H2-H3-C	23
H2-H3-EN	23
H2-H3-SS	23
H2-H3SW	Call
H2-H5	23
H2-H5-C	23
H2-H5-EN	23
H2-H5-SS	23

Product Number	Page
H2-H5SW	Call
H2-H7	23
H2-H7-C	23
H2-H7-EN	23
H2-H7-SS	23
H2-H7SW	Call
H2-J11	23
H2-J11-C	23
H2-J11-EN	23
H2-J11-SS	23
H2-J7	23
H2-J7-C	23
H2-J7-EN	23
H2-J7-SS	23
H2-J9	23
H2-J9-C	23
H2-J9-EN	23
H2-J9-SS	23
H2-K13	23
H2-K13-C	23
H2-K13-EN	23
H2-K15	23
H2-K15-C	23
H2-K15-EN	23
H2-K17	23
H2-K17-C	23
H2-K17-EN	23
HH33F	15
HH33FB	15
HH33M	15
HH33MB	15
H3-AT-SS	25
HH44F	15
HH44FB	15
HH44M	15
HH44MB	15
H4-E7	23
H4-E7-C	23
H4-E7-SS	23
H4-H1-EN	23
H4-H2-EN	23
H4-H3	23
H4-H3-C	23
H4-H3-EN	23
H4-H5	23
H4-H5-C	23
H4-H5-EN	23
H4-H7	23
H4-H7-C	23
H4-H7-EN	23
H4-J11	23
H4-J11-C	23
H4-J11-EN	23
H4-J11-SS	23
H4-J11SW	Call
H4-J7	23
H4-J7-C	23
H4-J7-EN	23
H4-J7-SS	23
H4-J7SW	Call
H4-J9	23
H4-J9-C	23
H4-J9-EN	23
H4-J9-SS	23
H4-J9SW	Call
H4-K13	23
H4-K13-C	23

Product Number	Page
H4-K13-EN	23
H4-K13-SS	23
H4-K15	23
H4-K15-C	23
H4-K15-EN	23
H4-K15-SS	23
H4-K17	23
H4-K17-C	23
H4-K17-EN	23
H4-K17-SS	23
H5-1M	25
H5-1M-C	25
H5-1M-EN	25
H5-2M	25
H5-2M-C	25
H5-2M-EN	25
H5-AAS-SS	24
H5-E5S	24
H5-E5S-EN	24
H5-E7S	24
H5-E7S-C	24
H5-E7S-EN	24
H5-H1S	24
H5-H1S-C	24
H5-H1S-EN	24
H5-H2S-EN	24
H5-H3S	24
H5-H3S-C	24
H5-H3S-EN	24
H5-H5S	24
H5-H5S-C	24
H5-H5S-EN	24
H5-H7S	24
H5-H7S-C	24
H5-H7S-EN	24
H5-J11S	24
H5-J11S-C	24
H5-J11S-EN	24
H5-J7S	24
H5-J7S-C	24
H5-J7S-EN	24
H5-J9S	24
H5-J9S-C	24
H5-J9S-EN	24
H6-J11	23
H6-J11-C	23
H6-J11-EN	23
H6-J7	23
H6-J7-C	23
H6-J7-EN	23
H6-J9	23
H6-J9-C	23
H6-J9-EN	23
H6-K13	23
H6-K13-C	23
H6-K13-EN	23
H6-K13-SS	23
H6-K13SW	Call
H6-K15	23
H6-K15-C	23
H6-K15-EN	23
H6-K15-SS	23
H6-K15SW	Call
H6-K17	23
H6-K17-C	23
H6-K17-EN	23
H6-K17-SS	23

Product Number	Page
H6-K17SW	Call
H8-2M	25
H8-2M-C	25
H8-2M-EN	25
H8-3M	25
H8-3M-C	25
H8-3M-EN	25
H8-4M	25
H8-4M-C	25
H8-4M-EN	25
H8-J11S	24
H8-J11S-C	24
H8-J11S-EN	24
H8-J7S	24
H8-J7S-C	24
H8-J7S-EN	24
H8-J9S	24
H8-J9S-C	24
H8-J9S-EN	24
HAL-A075	18
HAL-A100	18
HAL-A125	18
HAL-A150	18
HAL-A200	18
HAL-A250	18
HAL-A300	18
HAL-B075	18
HAL-B100	18
HAL-B125	18
HAL-B150	18
HAL-B200	18
HAL-B250	18
HAL-B300	18
HAL-C075	18
HAL-C100	18
HAL-C125	18
HAL-C150	18
HAL-C200	18
HAL-C250	18
HAL-C300	18
HAL-D075	18
HAL-D100	18
HAL-D125	18
HAL-D150	18
HAL-D200	18
HAL-D250	18
HAL-D300	18
HAL-DC075	18
HAL-DC100	18
HAL-DC125	18
HAL-DC150	18
HAL-DC200	18
HAL-DC250	18
HAL-DC300	18
HAL-DP075	18
HAL-DP100	18
HAL-DP125	18
HAL-DP150	18
HAL-DP200	18
HAL-DP250	18
HAL-DP300	18
HAL-E075	18
HAL-E100	18
HAL-E125	18
HAL-E150	18
HAL-E200	18
HAL-E250	18

Alpha Numeric Product Listing



Product Number	Page
HAL-E300	18
HAL-F075	18
HAL-F100	18
HAL-F125	18
HAL-F150	18
HAL-F200	18
HAL-F250	18
HAL-F300	18
HBGL21	26
HBGN1	26
HBGL2B5	26
HBGNB5	26
HBGL25	26
HBGN5	26
HBGL26	26
HBGN6	26
HBGL27	26
HBGN7	26
HBGL2X3	26
HBGX3	26
HBGL2X6	26
HBGX6	26
HBGL2X12	26
HBGX12	26
HBGN2	26
HBGN3	26
HBGADP	26
HBGLKT-30	26
HIS2F2	15
HIS2M2	15
HIS3F3	15
HIS3M3	15
HIS4F4	15
HIS4M4	15
HP251	20
HP251F	20
HP251X2.5	20
HP251X4	20
HP251X5.5	20
HP251X7	20
HP251X8.5	20
HP252	20
HP252F	20
HP252X2.5	20
HP252X4	20
HP252X5.5	20
HP252X7	20
HP252X8.5	20
HP253	20
HP253F	20
HP253X2.5	20
HP253X4	20
HP253X5.5	20
HP253X7	20
HP253X8.5	20
HP2F2	15
HP2F2B	15
HP2M2	15
HP2M2B	15
HP351	20
HP352	20
HP352F	20
HP352X2.5	20
HP352X4	20
HP352X5.5	20
HP352X7	20
HP352X8.5	20

Product Number	Page
HP353	20
HP353F	20
HP353V	20
HP353X2.5	20
HP353X4	20
HP353X5.5	20
HP353X7	20
HP353X8.5	20
HP354	20
HP354X2.5	20
HP354X4	20
HP354X5.5	20
HP354X7	20
HP354X8.5	20
HHP3F3	15
HHP3F3B	15
HHP3M3	15
HHP3M3B	15
HHP4F4	15
HHP4F4B	15
HHP4M4	15
HHP4M4B	15
HP554	20
HP554F	20
HP554X2.5	20
HP554X4	20
HP554X5.5	20
HP554X7	20
HP554X8.5	20
HP556	20
HP556F	20
HS001-EN	22
HS001-SS	22
HS101	22
HS101-C	Call
HS101-EN	22
HS101-SS	22
HS101-T	22
HS101-T-EN	22
HHS2	15
HS200	19
HS200V	19
HS202	22
HS202-90	22
HS202-90-EN	22
HS202-C	Call
HS202-EN	22
HS202-PL	22
HS202-PL-EN	22
HS202-SS	22
HS202-T	22
HS202-T-EN	22
HS204	19
HS204PL	19
HS204V	19
HS204VPL	19
HS205	20
HS205V	19
HS206	19
HS206PL	20
HS206V	19
HS206VPL	19
HS214	19
HS214PL	19
HS214V	19
HS214VPL	19
HS215	19

Product Number	Page
HS215V	19
HS216	19
HS216PL	19
HS216V	19
HS216VPL	19
HS224	19
HS224PL	19
HS224V	19
HS224VPL	19
HS225	19
HS225V	19
HS226	19
HS226PL	19
HS226V	19
HS226VPL	19
HHS2B	15
HHSF2	15
HHS2F2B	15
HHS2M2	15
HHS2M2B	15
HHS3	15
HS300	20
HS300HF	20
HS300V	20
HS303	22
HS303-90	22
HS303-90-EN	22
HS303-C	Call
HS303-EN	22
HS303-PL	22
HS303-PL-EN	22
HS303-SS	22
HS303-T	22
HS303-T-EN	22
HS306	20
HS306PL	20
HS306V	20
HS306VPL	20
HS308	20
HS308PL	20
HS308V	20
HS308VPL	20
HS308VPL2	20
HS316	20
HS316PL	20
HS316V	20
HS316VPL2	20
HS318	20
HS318PL	20
HS318V	20
HS318VPL	20
HS318VPL2	20
HS326	20
HS326PL	20
HS326V	20
HS326VPL	20
HS326VPL2	20
HS328	20
HS328PL	20
HS328V	20
HS328VPL	20
HS328VPL2	20
HHS3B	15
HHS3F3	15
HHS3F3B	15
HHS3M3	15
HHS3M3B	15

Product Number	Page
HHS4	15
HS404	22
HS404-90	22
HS404-90-EN	22
HS404-C	Call
HS404-EN	22
HS404-PL	22
HS404-PL-EN	22
HS404-SS	22
HS404-T	22
HS404-T-EN	22
HHS4B	15
HHS4F4	15
HHS4F4B	15
HHS4M4	15
HHS4M4B	15
HS500	20
HS504	20
HS504PL	20
HS505	22
HS505-90	22
HS505-90-EN	22
HS505-C	Call
HS505-EN	22
HS505-SS	22
HS505-T	22
HS505-T-EN	22
HS506	20
HS514	20
HS516	20
HS516PL	20
HS524	20
HS524PL	20
HS526	20
HS606	22
HS606-C	Call
HS606-EN	22
HS606-T	22
HS606-T-EN	22
HS606-SS	22
HS606-90	22
HS606-90-EN	22
HS-H1	24
HS-H1-EN	24
HS-H2	24
HS-H2-EN	24
HS-H3	24
HS-H3-EN	24
HS-H5	24
HS-H5-EN	24
HS-H7	24
HS-H7-EN	24
HS-J11	24
HS-J11-EN	24
HS-J7	24
HS-J7-EN	24
HS-J9	24
HS-J9-EN	24
HSS-A075	18
HSS-A100	18
HSS-A125	18
HSS-A150	18
HSS-A200	18
HSS-A250	18
HSS-A300	18
HSS-B075	18
HSS-B100	18

Product Number	Page
HSS-B125	18
HSS-B150	18
HSS-B200	18
HSS-B250	18
HSS-B300	18
HSS-C075	18
HSS-C100	18
HSS-C125	18
HSS-C150	18
HSS-C200	18
HSS-C250	18
HSS-C300	18
HSS-D075	18
HSS-D100	18
HSS-D125	18
HSS-D150	18
HSS-D200	18
HSS-D250	18
HSS-D300	18
HSS-DC075	18
HSS-DC100	18
HSS-DC125	18
HSS-DC150	18
HSS-DC200	18
HSS-DC250	18
HSS-DC300	18
HSS-DP075	18
HSS-DP100	18
HSS-DP125	18
HSS-DP150	18
HSS-DP200	18
HSS-DP250	18
HSS-DP300	18
HSS-E075	18
HSS-E100	18
HSS-E125	18
HSS-E150	18
HSS-E200	18
HSS-E250	18
HSS-E300	18
HSS-F075	18
HSS-F100	18
HSS-F125	18
HSS-F150	18
HSS-F200	18
HSS-F250	18
HSS-F300	18
HT2E1	25
HT2E1-C	25
HT2E1-EN	25
HT2S1-SS	25
HT2E2	25
HT2E2-C	25
HT2E2-EN	25
HT2E2-SS	25
HT2E3	25
HT2E3-C	25
HT2E3-EN	25
HT2E3-SS	25
HT2E4	25
HT2E4-C	25
HT2E4-EN	25
HT2E4-SS	25
HT2E5	25
HT2E5-C	25
HT2E5-EN	25
HT2E5-SS	25



Alpha Numeric Product Listing

Product Number	Page
HT2E6	25
HT2E6-C	25
HT2E6-EN	25
HT2E7	25
HT2E7-C	25
HT2E7-EN	25
HT2E7-SS	25
LFA2	9
LFPA2	9
LFPA2-SS	9
LMA2	9
LMPA1	9
LMPA2	9
LMPA2-SS	9
LO1	26
LO2	26
LO3	26
LO4	26
M1-M	3
M1-M-C	3
M1-M-EN	3
M1-MIT	3
M1-MIT-C	3
M1-MIT-EN	3
M1-MIT-ST	4
M1-MIT-ST-C	4
M1-MIT-ST-EN	4
M1-MPM	Call
M1-MPM-C	Call
M1-MPM-ST	Call
M1-MPM-ST-C	Call
M1-M-SS	3
M1-MST	4
M1-MST-C	4
M1-MST-EN	4
M1-MST-SS	4
M2-M	3
M2-M-C	3
M2-M-EN	3
M2-M-SS	3
M2-MST	4
M2-MST-C	4
M2-MST-EN	4
M2-MST-SS	4
MA1	5
MA1-B	5
MA1-BC	5
MA1-EN	5
MA1-SG	5
MA1-SS	5
MA2	5
MA2-B	5
MA2-BC	5
MA2-EN	5
MA2-SG	5
MA2-SS	5
MA3	5
MA3-B	5
MA3-BC	5
MA3-EN	5
MA3-SG	5
MA3-SS	5
MB2	6
MB2-B	6
MB2-BC	6
MB2-EN	6
MB2-SS	6
MB3	6
MB3-B	6

Product Number	Page
MB3-BC	6
MB3-EN	6
MB3-SG	6
MB3-SS	6
MB4	6
MB4-B	6
MB4-BC	6
MB4-EN	6
MB4-SG	6
MB4-SS	6
MC3	7
MC3-B	7
MC3-BC	7
MC3-EN	7
MC3-SS	7
MC4	7
MC4-B	7
MC4-BC	7
MC4-EN	7
MC4-SG	7
MC4-SS	7
MC5	7
MC5-B	7
MC5-BC	7
MC5-EN	7
MC5-SS	7
MD4-Q	8
MD5-Q	8
MD6-Q	8
MP1-M	3
MP1-M-C	3
MP1-M-EN	3
MP1-MIT	3
MP1-MIT-C	3
MP1-MIT-EN	3
MP1-MIT-MV	3
MP1-MIT-MV-C	3
MP1-MIT-MV-EN	3
MP1-MIT-ST	4
MP1-MIT-ST-C	4
MP1-MITST-EN	4
MP1-M-SS	3
MP1-MST	4
MP1-MST-C	4
MP1-MST-EN	4
MP1-MV	3
MP1-MV-C	3
MP1-MV-EN	3
MP1-MV-SS	3
MP2-M	3
MP2-M-C	3
MP2-M-EN	3
MP2-M-SS	3
MP2-MST	4
MP2-MST-C	4
MP2-MST-EN	4
MP2-MST-SS	4
MP2-MV	3
MP2-MV-C	3
MP2-MV-EN	3
MP2-MV-SS	3
MPA1	5
MPA1-B	5
MPA1-BC	5
MPA1-EN	5
MPA1-SS	5
MPA1-SS BSPP	Call
MPA2	5

Product Number	Page
MPA2-B	5
MPA2-BC	5
MPA2-B-CK	Call
MPA2-B-V	Call
MPA2-CK	Call
MPA2-EN	5
MPA2-SS	5
MPA2-SS BSPP	Call
MPA2-SS-CK	Call
MPA2-V	Call
MPA3	5
MPA3-B	5
MPA3-B-CK	Call
MPA3-EN	5
MPA3-SS	5
MPB1	6
MPB1-SS	6
MPB2	6
MPB2-SS	6
MPB3	6
MPB3-B	6
MPB3-BC	6
MPB3-EN	6
MPB3-SS	6
MPB4	6
MPB4-SS	6
MPC2	7
MPC2-SS	7
MPC3	7
MPC3-SS	7
MPC4	7
MPC4-B	7
MPC4-BC	7
MPC4-EN	7
MPC4-SS	7
MPC5	7
MPC5-SS	7
MPD4	8
MPD5	8
MPD6	8
PA1	5
PA15-EN	5
PA15-SS	5
PA1-B	5
PA1-BC	5
PA1-EN	5
PA1-SS	5
PA2	5
PA21	5
PA21-B	5
PA21-BC	5
PA21-EN	5
PA21-SS	5
PA25	5
PA25-EN	5
PA25-SS	5
PA27	5
PA27-B	5
PA27-BC	5
PA27-EN	5
PA27-SS	5
PA2-B	5
PA2-BC	5
PA2-EN	5
PA2-SS	5
PA3	5
PA37	5
PA37-B	5
PA37-BC	5

Product Number	Page
PA37-EN	5
PA37-SS	5
PA38	5
PA38-B	5
PA38-BC	5
PA38-EN	5
PA38-SS	5
PA3-B	5
PA3-BC	5
PA3-EN	5
PA3-SS	5
PB3	6
PB37	6
PB38	6
PC4	7
PC43	7
PC43-SS	7
PC45	7
PC45-SS	7
PC47	7
PC47-SS	7
RK1-M	3
RK1-M-C	3
RK1-M-EN	3
RK1-M-SS	3
RK1-MST	4
RK1-MST-C	4
RK1-MST-EN	4
RK1-MST-SS	4
RKA1	5
RKA15-EN	5
RKA15-SS	5
RKA1-B	5
RKA1-BC	5
RKA1-EN	5
RKA1-SS	5
RKA2	5
RKA21	5
RKA21-B	5
RKA21-BC	5
RKA21-EN	5
RKA21-SS	5
RKA22-SS	5
RKA25	5
RKA25-B	5
RKA25-BC	5
RKA25-EN	5
RKA25-SS	5
RKA27	5
RKA27-B	5
RKA27-BC	5
RKA27-EN	5
RKA27-SS	5
RKA2-B	5
RKA2-BC	5
RKA2-EN	5
RKA2-SS	5
RKA3	5
RKA37	5
RKA37-B	5
RKA37-BC	5
RKA37-EN	5
RKA37-SS	5
RKA38	5
RKA38-B	5
RKA38-BC	5
RKA38-EN	5
RKA38-SS	5
RKA3-B	5

Product Number	Page
RKA3-BC	5
RKA3-EN	5
RKA3-SS	5
RKB3	6
RKB37	6
RKB37-B	6
RKB37-BC	6
RKB37-EN	6
RKB37-SS	6
RKB38	6
RKB38-B	6
RKB38-BC	6
RKB38-EN	6
RKB38-SS	6
RKB3-B	6
RKB3-BC	6
RKB3-EN	6
RKB3-SS	6
RKC43	7
RKC43-B	7
RKC43-BC	7
RKC43-EN	7
RKC43-SS	7
RKC45	7
RKC45-B	7
RKC45-BC	7
RKC45-EN	7
RKC45-SS	7
RKC47	7
RKC47-B	7
RKC47-BC	7
RKC47-EN	7
RKC47-SS	7
RLFB2	10
RLFB3	10
RLFB4	10
RLFC2	10
RLFC3	10
RLFC4	10
RLFC5	10
RLFPB2	10
RLFPB3	10
RLFPB4	10
RLFPC2	10
RLFPC4	10
RLMB2	10
RLMB3	10
RLMB4	10
RLMC2	10
RLMC3	10
RLMC4	10
RLMC5	10
RLMPB1	10
RLMPB2	10
RLMPB3	10
RLMPB4	10
RLMPC2	10
RLMPC3	10
RLMPC4	10
RLMPC5	10
RLSB2	10
RLSB25	10
RLSB3	10
RLSB3-PL	10
RLSB4	10
RLSB4-PL	10
RLSC2	10
RLSC3	10
RLSC4	10

Alpha Numeric Product Listing



Product Number	Page
RLSC4-PL	10
RLSC5	10
RLSPB2	10
RLSPB3	10
RLSPB4	10
RLSPC2	10
RLSPC3	10
RLSPC4	10
RLSPC5	10
S0-MST	4
S0-MST-C	4
S0-MST-EN	4
S0-MST-SS	4
S1-M	3
S1-M-C	3
S1-M-EN	3
S1-M-SS	3
S1-MST	4
S1-MST-C	4
S1-MST-EN	4
S1-MST-SS	4
S2-M	3
S2-M-C	3
S2-M-EN	3
S2-M-SS	3
S2-MST	4
S2-MST-C	4
S2-MST-EN	4
S2-MST-SS	4
SA2	5
SA25	5
SA25-B	5
SA25-BC	5
SA25-EN	5
SA25-Q-PL	5
SA25-SS	5
SA2-B	5
SA2-BC	5
SA2-EN	5
SA2-PL-EN	5
SA2-PL-SS	5
SA2-Q-PL	5
SA2-SG	5
SA2-SG-PL	5
SA2-SS	5
SA3	5
SA3-B	5
SA3-BC	5
SA3-EN	5
SA3-PL-EN	5
SA3-PL-SS	5
SA3-Q-PL	5
SA3-SG-PL	5
SA3-SS	5
SB2	6
SB25	6
SB25-B	6
SB25-BC	6
SB2-B	6
SB2-BC	6
SB2-EN	6
SB2-PL-EN	6
SB3	6
SB3-B	6
SB3-BC	6
SB3-B-PL	6
SB3-EN	6
SB3-PL-EN	6
SB3-SS	6

Product Number	Page
SB4	6
SB4-B	6
SB4-BC	6
SB4-EN	6
SB4-SS	6
SC3	7
SC3-B	7
SC3-BC	7
SC3-EN	7
SC3-SS	7
SC4	7
SC4-B	7
SC4-BC	7
SC4-EN	7
SC4-SS	7
SC5	7
SC5-B	7
SC5-BC	7
SC5-EN	7
SC5-SS	7
SD4-Q	8
SD5-Q	8
SD6-Q	8
SP0-M	3
SP0-M-C	3
SP0-M-EN	3
SP0-MST	4
SP0-MST-C	4
SP0-MST-EN	4
SP1-M	3
SP1-M-C	3
SP1-M-EN	3
SP1-MST	4
SP1-MST-C	4
SP1-MST-EN	4
SP1-MV	3
SP1-MV-C	3
SP1-MV-EN	3
SP2-M	3
SP2-M-C	3
SP2-M-EN	3
SP2-MST	4
SP2-MST-C	4
SP2-MST-EN	4
SP2-MV	3
SP2-MV-C	3
SP2-MV-EN	3
SPA2	5
SPA25	5
SPA2-B	5
SPA2-BC	5
SPA2-B-PL	5
SPA2-EN	5
SPA2-PL	5
SPA2-PL-EN	5
SPA2-PL-SS	5
SPA2-SS	5
SPA3	5
SPA3-B	5
SPA3-BC	5
SPA3-EN	5
SPA3-PL	5
SPA3-PL-EN	5
SPA3-PL-SS	5
SPA3-SS	5
SPB25	6
SPB3	6
SPB3-PL	6
SPB3-SS	6

Product Number	Page
SPB4	6
SPB4-SS	6
SPC3	7
SPC3-PL	7
SPC3-SS	7
SPC4	7
SPC4-B	7
SPC4-PL	7
SPC4-SS	7
SPC5	7
SPC5-SS	7
SPD4	8
SPD5	8
SPD6	8
SVFA2	5
SVFA3	5
SVFB2	6
SVFB3	6
SVFB4	6
SVFC3	7
SVFC4	7
SVFC5	7
SVFD5	8
SVFD6	8
SVMA2	5
SVMA3	5
SVMB2	6
SVMB3	6
SVMB4	6
SVMC3	7
SVMC4	7
SVMC5	7
SVMD5	8
SVMD6	8
SVSA2	5
SVSA3	5
SVSB3	6
SVSB4	6
SVSC3	7
SVSC4	7
SVSC5	7
SVSD5	8
T1	25
T19	25
T19-C	25
T19-EN	25
T1-C	25
T1-EN	25
T1-SS	25
T2	25
T29	Call
T29-C	Call
T2-C	25
T2-EN	25
T2-SS	25
TFA1	12
TFA1-B	12
TFA2	12
TFA2-B	12
TFA3	12
TFA3-B	12
TFB3	12
TFPA1	12
TFPA2	12
TFPA3	12
TFPB2	12
TFPB3	12
TLFA1	11
TLFA1-SS	11

Product Number	Page
TLFA2	11
TLFA2-SS	11
TLFA3	11
TLFA3-SS	11
TLFC2	11
TLFC3	11
TLFC4	11
TLFC5	11
TLFPA1	11
TLFPA2	11
TLFPA2-SS	11
TLFPC3	11
TLMA1	11
TLMA1-SS	11
TLMA2	11
TLMA2-SS	11
TLMA3	11
TLMA3-SS	11
TLMC2	11
TLMC3	11
TLMC4	11
TLMC5	11
TLMPA1	11
TLMPA2	11
TLMPA2-SS	11
TLMPC2	11
TLMPC3	11
TLMPC4	11
TLSA2	11
TLSA25	11
TLSA2-PL	11
TLSA2-SS	11
TLSA3	11
TLSA3-PL	11
TLSA3-SS	11
TLSC3	11
TLSC4	11
TLSC5	11
TLSPA2	11
TLSPA3	11
TLSPC3	11
TLSPC4	11
TMA1	12
TMA1-B	12
TMA2	12
TMA2-B	12
TMA3	12
TMA3-B	12
TMB3	12
TMPA1	12
TMPA2	12
TMPA2-B	12
TMPA2-SS	12
TMPA3	12
TMPB2	12
TMPB3	12
TSA2	12
TSA25	12
TSA25-B	12
TSA2-B	12
TSA2-B-PL	12
TSA2-PL	12
TSA3	12
TSA3-B	12
TSA3-B-PL	12
TSA3-PL	12
TSB3	12
TSB3-PL	12
TSB4	12

Product Number	Page
TSPA2	12
TSPA2-PL	12
TSPA3	12
TSPA3-PL	12
TSPB3	12
TSPB3-PL	12
VA-BR	8
VA-S	8
VA-SS	8
VB-S	8
VB-SS	8
VC-S	8
VC-SS	8
VD-S	8
VD-SS	8
WA-BN	8
WA-EP	8
WA-V	8
WB-BN	8
WB-V	8
WC-BN	8
WC-V	8
WD-BN	8
WD-EP	8
WD-V	8
WB-EP	8
WC-EP	8
FA2-U	2
FA3-U	2
MA2-U	2
MA3-U	2
SA2-U	2
SA25-U	2
SA3-U	2
SA2-U-PL	2
SA3-U-PL	2
FA2-SS-U	2
MA2-SS-U	2
SA2-SS-U	2
FB3-U	2
FB4-U	2
MB3-U	2
MB4-U	2
SB3-U	2
SB4-U	2
FA2-SS-SG	2
FB3-SS-SG	2
FC4-SS-SG	2
MA1-SS-SG	2
MA2-SS-SG	2
MB3-SS-SG	2
MC4-SS-SG	2
SA2-SS-SG	2
SB3-SS-SG	2
SC4-SS-SG	2
FA2-SS-Q	2
FB3-SS-Q	2
FC4-SS-Q	2
MA2-SS-Q	2
MB3-SS-Q	2
MC4-SS-Q	2
SA2-SS-Q	2
SB3-SS-Q	2
SC4-SS-Q	2



Crossover

Hofmann Fluid Power Interchange A, B, C & D Series

****PLEASE NOTE** that some mfg's have higher PSI ratings than what is recommended for our products. Please be sure to check applications and psi information before crossing over, to ensure proper match. *This crossover is for reference only.*

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
10	Hansen	MPA2	5
11	Hansen	FPA2	5
12	Hansen	MPA1	5
13	Hansen	FPA1	5
14	Hansen	MPA3	5
15	Hansen	FPA3	5
16	Hansen	SPA2	5
16	Parker	MC4	7
17	Hansen	SPA3	5
17	Parker	FC4	7
18	Hansen	SPA25	5
24	Parker	MB3	6
25	Parker	FB3	6
38	Hansen	MPB1	6
40	Hansen	MPB2	6
41	Hansen	FPB2	6
42	Hansen	MPB3	6
43	Hansen	FPB3	6
44	Hansen	MPB4	6
45	Hansen	FPB4	6
50	Hansen	MPC2	7
52	Hansen	MPC3	7
53	Hansen	FPC3	7
54	Hansen	MPC4	7
55	Hansen	FPC4	7
56	Hansen	MPC5	7
57	Hansen	FPC5	7
59	Hansen	SPC3	7
60	Hansen	SPC4	7
61	Hansen	SPC5	7
64	Hansen	MPD4	8
65	Hansen	FPD4	8
66	Hansen	MPD5	8
67	Hansen	FPD5	8
68	Hansen	MPD6	8
69	Hansen	FPD6	8
70	Hansen	SPD4	8
71	Hansen	SPD5	8
72	Hansen	SPD6	8
120	Coilhose	FC4	7
121	Coilhose	MC3	7
122	Coilhose	MC4	7
123	Coilhose	FC3	7
127	Coilhose	SC3	7
128	Coilhose	SC4	7
150	Coilhose	FA2	5
151	Coilhose	FA3	5
152	Coilhose	MA2	5
153	Coilhose	SA2	5
154	Coilhose	SA25	5
155	Coilhose	MA3	5
156	Coilhose	SA3	5
158	Coilhose	FA1	5
159	Coilhose	MA1	5
180	Tomco	MA1-Q	5
181	Tomco	MA2-Q	5
182	Tomco	MA3-Q	5
183	Tomco	FA1-Q	5
184	Tomco	FA2-Q	5
185	Tomco	FA3-Q	5
186	Tomco	SA2-Q	5
187	Tomco	SA3-Q	5
188	Tomco	SA25-Q	5
189	Tomco	SA2-Q-PL	5
190	Tomco	SA3-Q-PL	5
400	Hansen	FB2	6
404	Hansen	SPB2	6
406	Hansen	SPB3	6
408	Hansen	SPB4	6
410	Hansen	MB2	6
420	Hansen	FB3	6
430	Hansen	MB3	6
440	Hansen	FB4	6
450	Hansen	MB4	6
500	Hansen	FC3	7
510	Hansen	MC3	7
520	Hansen	FC4	7
530	Hansen	MC4	7
540	Hansen	FC5	7
550	Hansen	MC5	7
570	Hansen	SC3	7
580	Coilhose	FB3	6
580	Hansen	SC4	7
581	Coilhose	MB3	6
582	Coilhose	FB2	6
583	Coilhose	MB2	6
584	Coilhose	FB4	6
586	Coilhose	SB3	6
587	Coilhose	MB4	6
588	Coilhose	SB4	6
590	Hansen	SC5	7
707	Milton	FA1-B	5
708	Milton	MA1-B	5
713	Milton	FA2-SG	5

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
714	Milton	MA2-SG	5
715	Milton	FA2-B	5
716	Milton	MA2-B	5
717	Milton	SA2-SG	5
718	Milton	FA3-B	5
719	Milton	MA3-B	5
726	Milton	MPA1	5
727	Milton	MPA2	5
728	Milton	FPA2	5
729	Milton	FPA1	5
732	Milton	FPA3	5
733	Milton	MPA3	5
736	Milton	SPA2	5
745	Milton	FA2-U	2
746	Milton	MA2-U	2
755	Milton	FA2-Q	5
756	Milton	MA2-Q	5
800	Hansen	FA1	5
900	Hansen	MA1	5
1000	Hansen	FA2	5
1100	Hansen	MA2	5
1200	Hansen	FA3	5
1201	Coilhose	MPC4	7
1202	Coilhose	FPC4	7
1203	Coilhose	MPC3	7
1204	Coilhose	FPC3	7
1207	Coilhose	SPC3	7
1208	Coilhose	SPC4	7
1300	Hansen	MA3	5
1501	Coilhose	MPA2	5
1502	Coilhose	FPA2	5
1503	Coilhose	MPA3	5
1504	Coilhose	MPA1	5
1505	Coilhose	FPA3	5
1506	Coilhose	SPA2	5
1507	Coilhose	SPA25	5
1508	Coilhose	SPA3	5
1509	Coilhose	FPA1	5
1513	Foster	SA2-PL	5
1600	Hansen	SA2	5
1700	Hansen	SA3	5
1713	Foster	SA3-PL	5
1714	Foster	SB3-PL	6
1800	Hansen	SA25	5
1802	Tomco	MPA1	5
1803	Tomco	FPA1	5
1804	Tomco	MPA2	5
1805	Tomco	FPA2	5
1806	Tomco	MPA3	5
1807	Tomco	FPA3	5
1813	Milton	FC3	7
1814	Foster	SB4-PL	6
1814	Milton	MC3	7
1815	Foster	SC4-PL	7
1815	Milton	FC4	7
1816	Milton	MC4	7
1824	Tomco	SPA2	5
1826	Tomco	SPA3	5
1827	Tomco	SPA25	5
1833	Milton	FB2	6
1834	Milton	MB2	6
1835	Milton	FB3	6
1836	Milton	MB3	6
1837	Milton	MPB3	6
1838	Milton	FPB3	6
1839	Milton	MPB2	6
1840	Milton	FPB2	6
1855	Milton	MPC2	7
1857	Milton	MPC4	7
1858	Milton	FPC4	7
1859	Milton	MPC3	7
1860	Milton	FPC3	7
2800	Hansen	FA1-Q	5
2803	Foster	FA1	5
2900	Hansen	MA1-Q	5
2903	Foster	MA1	5
3000	Hansen	FA2-Q	5
3003	Foster	FA2	5
3100	Hansen	MA2-Q	5
3103	Foster	MA2	5
3200	Hansen	FA3-Q	5
3203	Foster	FA3	5
3300	Hansen	MA3-Q	5
3303	Foster	MA3	5
3401	Coilhose	MPD5	8
3402	Coilhose	FPD5	8
3600	Hansen	SA2-Q	5
3600	Hansen	SA25-B	5
3603	Foster	SA2	5
3653	Foster	SA25	5
3703	Foster	SA3	5
4000	Hansen	FB2-Q	6
4004	Foster	FB2	6
4004	Hansen	SB2	6

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
4006	Hansen	SB3	6
4008	Hansen	SB4	6
4050	Hansen	SB25	6
4100	Hansen	MB2-Q	6
4104	Foster	MB2	6
4200	Hansen	FB3-Q	6
4204	Foster	FB3	6
4300	Hansen	MB3-Q	6
4304	Foster	MB3	6
4400	Hansen	FB4-Q	6
4404	Foster	FB4	6
4500	Hansen	MB4-Q	6
4504	Foster	MB4	6
4604	Foster	SB2	6
4704	Foster	SB25	6
4804	Foster	SB3	6
4904	Foster	SB4	6
5000	Hansen	FC3-Q	7
5005	Foster	FC3	7
5100	Hansen	MC3-Q	7
5105	Foster	MC3	7
5200	Hansen	FC4-Q	7
5205	Foster	FC4	7
5300	Hansen	MC4-Q	7
5305	Foster	MC4	7
5400	Hansen	FC5-Q	7
5405	Foster	FC5	7
5500	Hansen	MC5-Q	7
5505	Foster	MC5	7
5700	Hansen	SC3-Q	7
5705	Foster	SC3	7
5800	Hansen	SC4-Q	7
5801	Coilhose	MPB3	6
5802	Coilhose	FPB3	6
5803	Coilhose	MPB2	6
5804	Coilhose	FPB2	6
5805	Coilhose	FPB4	6
5805	Foster	SC4	7
5806	Coilhose	SPB3	6
5808	Coilhose	SPB4	6
5809	Coilhose	MPB4	6
5900	Hansen	SC5-Q	7
5905	Foster	SC5	7
6200	Hansen	FD4-Q	8
6300	Hansen	MD4-Q	8
6400	Hansen	FD5-Q	8
6500	Hansen	MD5-Q	8
6600	Hansen	FD6-Q	8
6700	Hansen	MD6-Q	8
6800	Hansen	SD4-Q	8
6900	Hansen	SD5-Q	8
7000	Hansen	SD6-Q	8
10-3	Foster	MPA2	5
11-3	Foster	FPA2	5
12-3	Foster	MPA1	5
40400	Hansen	SB2-Q	6
40500	Hansen	SB25-Q	6
40600	Hansen	SB3-Q	6
10-3B	Foster	MPA2-B	5
10-3D	Foster	MPA2-V	Call
10-3DB	Foster	MPA2-B-V	Call
10-3G	Foster	MPA2-CK	Call
10-3GB	Foster	MPA2-B-CK	Call
10-3GS/S	Foster	MPA2-SS-CK	Call
10-3S/S	Foster	MPA2-SS	5
11-3B	Foster	FPA2-B	5
11-3S/S	Foster	FPA2-SS	5
120A	Coilhose	FC4-Q	7
121A	Coilhose	MC3-Q	7
122A	Coilhose	MC4-Q	7
123A	Coilhose	FC3-Q	7
12-3B	Foster	MPA1-B	5
12-3S/S	Foster	MPA1-SS	5
128A	Coilhose	SC4-Q	7
128AL	Coilhose	SC4-PL	7
13-3	Foster	FPA1	5
13-3B	Foster	FPA1-B	5
14-3	Foster	MPA3	5
14-3GB	Foster	MPA3-B-CK	Call
14-5	Parker	SB3-PL	6
1506L	Coilhose	SPA2-PL	5
1508L	Coilhose	SPA3-PL	5
150A	Coilhose	FA2-Q	5
150U	Coilhose	FA2-U	2
151A	Coilhose	FA3-Q	5
152A	Coilhose	MA2-Q	5
152U	Coilhose	MA2-U	2
15-3	Foster	FPA3	5
153A	Coilhose	SA2-Q	5
154A	Coilhose	SA25-Q	5
154AL	Coilhose	SA2-Q-PL	5
155A	Coilhose	MA3-Q	5
156A	Coilhose	SA3-Q	5
156AL	Coilhose	SA3-Q-PL	5

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
158A	Coilhose	FA1-Q	5
159A	Coilhose	MA1-Q	5
15X2F	Coilhose	FA1-SG	5
15X2M	Coilhose	MA1-SG	5
15X4F	Coilhose	FA2-SG	5
15X4M	Coilhose	MA2-SG	5
15X6F	Coilhose	FA3-SG	5
15X6M	Coilhose	MA3-SG	5
1600P	Hansen	SA2-PL	5
16-3	Foster	SPA2	5
16-3B	Foster	SPA2-B	5
16-3S/S	Foster	SPA2-SS	5
16-5	Parker	SB4-PL	6
165-3	Foster	SPA25	5
16-5B	Parker	SC3	7
16-6B	Parker	SC4	7
16-6BP	Parker	SC4-PL	7
16-7B	Parker	SC5	7
16E	Parker	MC3	7
16G	Parker	MC5	7
16P	Hansen	SPA2-PL	5
1700P	Hansen	SA3-PL	5
1717-4	Milton	SA2-PL-SG	5
1717-6	Milton	SA3-PL-SG	5
17-3	Foster	SPA3	5
1736-4	Milton	SPA2-PL	5
1736-6	Milton	SPA3-PL	5
17-3B	Foster	SPA3-B	5
1797-6	Milton	SB3-PL	6
1797-6	Milton	SPB3-PL	6
17E	Parker	FC3	7
17E	Parker	FC5	7
17P	Hansen	SPA3-PL	5
1804 303	Tomco	MPA2-SS	5
1804 B2	Tomco	MPA2-B	5
1804-B5	Tomco	MPA2-SS BSPP	Call
1805 303	Tomco	FPA2-SS	5
1805 B2	Tomco	FPA2-B	5
1836-6	Milton	SB3	6
1837-6	Milton	SPB3	6
1-SB3	Hansen	RKA2	5
1-SB5	Hansen	RKA15	5
1-SB7	Hansen	RKA27	5
1-SC7	Hansen	RKA25	5
1-SD11	Hansen	RKA3	5
1-SD7	Hansen	RKA37	5
1-SD9	Hansen	RKA38	5
22AS-31H	Hansen	SA25-Q	5
22AS-37H	Hansen	SA3-Q	5
24-5B	Parker	SB3	6
24-6B	Parker	SB4	6
24C	Parker	MB2	6
24F	Parker	MB4	6
25C	Parker	FB2	6
25E	Parker	FB4	6
2803S/S	Foster	FA1-SS	5
2803W	Foster	FA1-B	5
2903S/S	Foster	MA1-SS	5
2903W	Foster	MA1-B	5
2DB2-B	Perfecting	SA2-Q-PL	5
2DB3-B	Perfecting	SA3-Q-PL	5

Crossover



Hofmann Fluid Power Interchange A, B, C & D Series

****PLEASE NOTE** that some mfg's have higher PSI ratings than what is recommended for our products. Please be sure to check applications and psi information before crossing over, to ensure proper match. *This crossover is for reference only.*

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
2FS2.5-B	Perfecting	SA2-PL	5
2FS2.5-B	Perfecting	SA25-B	5
2FS2-B	Perfecting	SA2-B	5
2FS2-S	Perfecting	SA2-SS	5
2FS3-B	Perfecting	SA3-PL	5
2UF2-B	Perfecting	FA2-U	2
2UM2-B	Perfecting	MA2-U	2
3003S/S	Foster	FA2-SS	5
3003W	Foster	FA2-B	5
30SVS-25F	Hansen	SVFA2	5
30SVS-25M	Hansen	SVMA2	5
3103S/S	Foster	MA2-SS	5
3103W	Foster	MA2-B	5
3202S/S	Foster	FA3-SS	5
3203W	Foster	FA3-B	5
32AS-50H	Hansen	SB4-Q	6
3303S/S	Foster	MA3-SS	5
3303W	Foster	MA3-B	5
340A	Coilhouse	FD5-Q	8
342A	Coilhouse	MD5-Q	8
343A	Coilhouse	SD5-Q	8
3603S/S	Foster	SA2-SS	5
3603W	Foster	SA2-B	5
3653W	Foster	SA25-B	5
3700P	Hansen	SA2-Q-PL	5
3700P	Hansen	SA3-Q-PL	5
3703S/S	Foster	SA3-SS	5
3703W	Foster	SA3-B	5
38-4	Foster	MPB1	6
3DB3-B	Perfecting	SB3-Q-PL	6
3DF2-B	Perfecting	FB2-Q	6
3DF3-B	Perfecting	FB3-Q	6
3DF4-B	Perfecting	FB4-Q	6
3DM2-B	Perfecting	MB2-Q	6
3DM3-B	Perfecting	MB3-Q	6
3DM4-B	Perfecting	MB4-Q	6
3DS2-B	Perfecting	SB2-Q	6
3DS3-B	Perfecting	SB3-Q	6
3DS4-B	Perfecting	SB4-Q	6
3FB3	Perfecting	SB3-PL	6
3FF2	Perfecting	FB2	6
3FF3	Perfecting	FB3	6
3FF4	Perfecting	FB4	6
3FM2	Perfecting	MB2	6
3FM3	Perfecting	MB3	6
3FM3-S	Perfecting	MB3-SS	6
3FM4	Perfecting	MB4	6
3FS2	Perfecting	SB2	6
3FS3	Perfecting	SB3	6
3FS3-B	Perfecting	SA3-B	5
3FS4	Perfecting	SB4	6
3-PB3	Hansen	PA2	5
3-PB5	Hansen	PA15	5
3-PB7	Hansen	PA27	5
3-PC7	Hansen	PA25	5
3-PD11	Hansen	PA3	5
3-PD7	Hansen	PA37	5
3-PD9	Hansen	PA38	5
3-SB3	Hansen	RKA2-Q	5
3-SB7	Hansen	RKA27-Q	5
3-SC7	Hansen	RKA25-Q	5
3-SD11	Hansen	RKA3-Q	5
3-SD7	Hansen	RKA37-Q	5
3-SD9	Hansen	RKA38-Q	5
4004W	Foster	FB2-B	6
40-4	Foster	MPB2	6
40-SD11	Hansen	RKB3	6
40-SD7	Hansen	RKB37	6
40-SD9	Hansen	RKB38	6
40SVS-37F	Hansen	SVFB3	6
40SVS-37H	Hansen	SVSB3	6
40SVS-37M	Hansen	SVMB3	6
40SVS-50M	Hansen	SVMB4	6
4104W	Foster	MB2-B	6
41-4	Foster	FPB2	6
4204W	Foster	FB3-B	6
42-4	Foster	MPB3	6
4304W	Foster	MB3-B	6
43-4	Foster	FPB3	6
4404W	Foster	FB4-B	6
44-4	Foster	MPB4	6
4504W	Foster	MB4-B	6
45-4	Foster	FPB4	6
4604W	Foster	SB2-B	6
46-4	Foster	SPB2	6
4704W	Foster	SB25-B	6
47-4	Foster	SPB25	6
4804W	Foster	SB3-B	6
48-4	Foster	SPB3	6
4904W	Foster	SB4-B	6
49-4	Foster	SPB4	6
4DB4-B	Perfecting	SC4-Q-PL	7
4DF3-B	Perfecting	FC3-Q	7
4DF4-B	Perfecting	FC4-Q	7

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
4DF6-B	Perfecting	FC5-Q	7
4DM3-B	Perfecting	MC3-Q	7
4DM4-B	Perfecting	MC4-Q	7
4DM6-B	Perfecting	MC5-Q	7
4DS3-B	Perfecting	SC3-Q	7
4DS4-B	Perfecting	SC4-Q	7
4DS6-B	Perfecting	SC5-Q	7
4FB4	Perfecting	SC4-PL	7
4FF3	Perfecting	FC3	7
4FF4	Perfecting	FC4	7
4FF6	Perfecting	FC5	7
4FM3	Perfecting	MC3	7
4FM4	Perfecting	MC4	7
4FM4-S	Perfecting	MC4-SS	7
4FM6	Perfecting	MC5	7
4FS3	Perfecting	SC3	7
4FS4	Perfecting	SC4	7
4F6	Perfecting	SC5	7
4-PD11	Hansen	PB3	6
4-PD7	Hansen	PB37	6
4-PD9	Hansen	PB38	6
4-SD11	Hansen	RKB3-Q	6
4-SD7	Hansen	RKB37-Q	6
4-SD9	Hansen	RKB38-Q	6
5005W	Foster	FC3-B	7
50-5	Foster	MPC2	7
50-SD11	Hansen	RKC3	7
50-SD7	Hansen	RKC37	7
50-SD9	Hansen	RKC38	7
50-SP13	Hansen	RKC43	7
50-SP15	Hansen	RKC45	7
50-SP17	Hansen	RKC47	7
50-SP19	Hansen	RKC4	N/A
50SVS-50F	Hansen	SVFC4	7
50SVS-50H	Hansen	SVSC4	7
50SVS-50M	Hansen	SVMC4	7
5105W	Foster	MC3-B	7
51-3	Foster	SPA2-PL	6
51-4	Foster	SPB2-PL	6
5205W	Foster	FC4-B	7
52-5	Foster	MPC3	7
5305W	Foster	MC4-B	7
53-5	Foster	FPC3	7
5405W	Foster	FC5-B	7
54-5	Foster	MPC4	7
5505W	Foster	MC5-B	7
55-5	Foster	FPC4	7
56-5	Foster	MPC5	7
5705W	Foster	SC3-B	7
57-5	Foster	FPC5	7
5805W	Foster	SC4-B	7
5806L	Coilhouse	SPB3-PL	6
580A	Coilhouse	FB3-Q	6
581A	Coilhouse	MB3-Q	6
582A	Coilhouse	FB2-Q	6
583A	Coilhouse	MB2-Q	6
584A	Coilhouse	FB4-Q	6
586A	Coilhouse	SB3-Q	6
586AL	Coilhouse	SB3-Q-PL	6
586L	Coilhouse	SB4-PL	6
587A	Coilhouse	MB4-Q	6
588A	Coilhouse	SB4-Q	6
5905W	Foster	SC5-B	7
59-5	Foster	SPC3	7
5-PD11	Hansen	PC3	7
5-PD7	Hansen	PC37	7
5-PD9	Hansen	PC38	7
5-PP13	Hansen	PC43	7
5-PP15	Hansen	PC45	7
5-PP17	Hansen	PC47	7
5-PP19	Hansen	PC4	7
5-SD7	Hansen	RKC37-Q	7
5-SD9	Hansen	RKC38-Q	7
5-SP13	Hansen	RKC43-Q	7
5-SP15	Hansen	RKC45-Q	7
5-SP17	Hansen	RKC47-Q	7
5-SP19	Hansen	RKC4-Q	7
60-5	Foster	SPC4	7
60-5B	Foster	SPC4-B	N/A
60SVS-75F	Hansen	SVFD5	8
60SVS-75M	Hansen	SVMD5	8
61-5	Foster	SPC5	7
64-6	Foster	MPD4	8
6534K12	McMaster	MC3-Q	7
6534K13	McMaster	MC4-Q	7
6534K14	McMaster	MC5-Q	7
6534K16	McMaster	MA2-Q	5
6534K17	McMaster	MA3-Q	5
6534K18	McMaster	FPA1	5
6534K19	McMaster	MA1	5
6534K22	McMaster	FC3-Q	7
6534K23	McMaster	FC4-Q	7
6534K24	McMaster	FC5-Q	7
6534K27	McMaster	FA3-Q	5

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
6534K28	McMaster	MA1-Q	5
6534K34	McMaster	FPC5	7
6534K42	McMaster	MPC3	7
6534K43	McMaster	MPC4	7
6534K44	McMaster	MPC5	7
6534K46	McMaster	MPA2	5
6534K47	McMaster	MPA3	5
6534K52	McMaster	FC3	7
6534K53	McMaster	FPC4	7
6534K56	McMaster	FPA2	5
6534K57	McMaster	FPA3	5
6534K66	McMaster	SPA2	5
6534K67	McMaster	SPA3	5
6534K71	McMaster	MPB2	6
6534K72	McMaster	MPB3	6
6534K73	McMaster	MPB4	6
6534K74	McMaster	FPB2	6
6534K75	McMaster	FPB3	6
6534K76	McMaster	FPB4	6
6534K77	McMaster	SPB2	6
6534K78	McMaster	SPB3	6
6534K79	McMaster	SPB4	6
6534K81	McMaster	MB2-Q	6
6534K82	McMaster	MB3-Q	6
6534K83	McMaster	MB4-Q	6
6534K84	McMaster	FB2-Q	6
6534K85	McMaster	FB3-Q	6
6536K18	McMaster	MA2	5
6536K19	McMaster	MA3	5
6536K21	McMaster	MB2	6
6536K22	McMaster	MB3	6
6536K23	McMaster	MB4	6
6536K28	McMaster	FA2	5
6536K29	McMaster	FA3	5
6536K31	McMaster	FB2	6
6536K32	McMaster	FB3	6
6536K33	McMaster	FB4	6
6536K37	McMaster	MC3	7
6536K38	McMaster	SA2	5
6536K39	McMaster	SA25-B	5
6536K39	McMaster	SA3	5
6536K41	McMaster	MC4	7
6536K42	McMaster	FC3	7
6536K42	McMaster	MC5	7
6536K51	McMaster	FC4	7
6536K52	McMaster	FC5	7
6536K61	McMaster	SB2	6
6536K62	McMaster	SB3	6
6536K63	McMaster	SB4	6
6536K71	McMaster	SC3	7
6536K72	McMaster	SC4	7
6536K73	McMaster	SC5	7
65-6	Foster	FPD4	8
66-6	Foster	MPD5	8
67-6	Foster	FPD5	8
68-6	Foster	MPD6	8
69-6	Foster	FPD6	8
6DF4-B-PCC	Perfecting	FD4-Q	8
6DF6-B-PCC	Perfecting	FD5-Q	8
6DF8-B-PCC	Perfecting	FD6-Q	8
6DM4-B-PCC	Perfecting	MD4-Q	7
6DM6-B-PCC	Perfecting	MD5-Q	7
6DM8-B-PCC	Perfecting	MD6-Q	8
6DS4-B-PCC	Perfecting	SD4-Q	8
6DS6-B-PCC	Perfecting	SD5-Q	8
6DS8-B-PCC	Perfecting	SD6-Q	8
70-6	Foster	SPD4	8
71-3	Foster	SPA3-PL	5
71-4	Foster	SPB3-PL	6
71-5	Foster	SPC3-PL	7
71-6	Foster	SPD5	8
717-6	Milton	SA3-SG	5
72-6	Foster	SPD6	8
736-6	Milton	SPA3	5
81-4	Foster	SPB4-PL	6
81-5	Foster	SPC4-PL	7
95815K79	McMaster	SPC4	7
95815K87	McMaster	SPC3	7
95815K89	McMaster	SPC5	7
A180	Tomco	MA1-SG	5
A181	Tomco	MA2-SG	5
A182	Tomco	MA3-SG	5
A183	Tomco	FA1-SG	5
A184	Tomco	FA2-SG	5
A185	Tomco	FA3-SG	5
A186	Tomco	SA2-SG	5
A187	Tomco	SA3-SG	5
A189	Tomco	SA2-PL-SG	5
A190	Tomco	SA3-PL-SG	5
B-10	Hansen	MPA2-B	5
B-11	Hansen	FPA2-B	5
B-12	Hansen	MPA1-B	5
B-13	Hansen	FPA1-B	5

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
B16	Parker	MC4-B	7
B17	Parker	FC4-B	7
B20-3B	Parker	SA2	5
B20-3B	Parker	SA2-SG	5
B20-3BP	Parker	SA2-PL	5
B20-3BP	Parker	SA2-PL-SG	5
B20-4B	Parker	SA25	5
B20-4B	Parker	SA25-SG	5
B20-5B	Parker	SA3	5
B20-5B	Parker	SA3-SG	5
B20-5B	Parker	SA3-PL	5
B20-5BP	Parker	SA3-PL-SG	5
B22	Parker	MA2	5
B22	Parker	MA2-SG	5
B22A	Parker	MA1	5
B22A	Parker	MA1-SG	5
B22-C3	Parker	RKA2	5
B22-C5	Parker	RKA15	5
B22-C6	Parker	RKA27	5
B22E	Parker	MA3	5
B22E	Parker	MA3-SG	5
B22-E6	Parker	RKA37	5
B22-E8	Parker	RKA38	5
B23	Parker	FA2	5
B23	Parker	FA2-SG	5
B23A	Parker	FA1	5
B23A	Parker	FA1-SG	5
B23E	Parker	FA3	5
B23E	Parker	FA3-SG	5
B24	Parker	MB3-B	6
B24AS-25F	Hansen	FA2-U	2
B24AS-25M	Hansen	MA2-U	2
B25	Parker	FB3-B	6
B30-3B	Parker	SA2-Q	5
B30-3BP	Parker	SA2-Q-PL	5
B30-4B	Parker	SA25-Q	5
B30-5B	Parker	SA3-Q	5
B30-5BP	Parker	SA3-Q-PL	5
B3-1	Tomco	RKA2-Q	5
B32	Parker	MA2-Q	5
B32A	Parker	MA1-Q	5
B32E	Parker	MA3-Q	5
B33	Parker	FA2-Q	5
B33A	Parker	FA1-Q	5
B33E	Parker	FA3-Q	5
B34	Parker	MB3-Q	6
B34-5B	Parker	SB3-Q	6
B34-5BP	Parker	SB3-Q-PL	6
B34-6B	Parker	SB4-Q	6
B34C	Parker	MB2-Q	6
B34F	Parker</		



Crossover

Hofmann Fluid Power Interchange A, B, C & D Series

****PLEASE NOTE** that some mfg's have higher PSI ratings than what is recommended for our products. Please be sure to check applications and psi information before crossing over, to ensure proper match. *This crossover is for reference only.*

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
D2H2-S	Perfecting	PA27-SS	5
D2K3	Perfecting	PA38	5
D2L3	Perfecting	PA3	5
D2M1	Perfecting	MPA1	5
D2M1-B	Perfecting	MPA1-B	5
D2M1-S	Perfecting	MPA1-SS	5
D2M2	Perfecting	MPA2	5
D2M2-B	Perfecting	MPA2-B	5
D2M2-S	Perfecting	MPA2-SS	5
D2M3	Perfecting	MPA3	5
D2S2	Perfecting	SPA2	5
D2S2.5	Perfecting	SPA2.5	5
D2S2-B	Perfecting	SPA2-B	5
D2S2-S	Perfecting	SPA2-SS	5
D2S3	Perfecting	SPA3	5
D2S3	Perfecting	SPA3-PL	5
D320	DynaQuip	FA1	5
D321	DynaQuip	MA1	5
D340	DynaQuip	FA2	5
D341	DynaQuip	MA2	5
D342	DynaQuip	SA2	5
D344	DynaQuip	SA2-PL	5
D352	DynaQuip	MA3	5
D360	DynaQuip	FA3	5
D361	DynaQuip	MA3	5
D362	DynaQuip	SA3	5
D364	DynaQuip	SA3-PL	5
D3B3	Perfecting	SPB3-PL	6
D3F2	Perfecting	FPB2	6
D3F3	Perfecting	FPB3	6
D3F3-S	Perfecting	FPB3-SS	6
D3F4	Perfecting	FPB4	6
D3M2	Perfecting	MPB2	6
D3M3	Perfecting	MPB3	6
D3M3-S	Perfecting	MPB3-SS	6
D3M4	Perfecting	MPB4	6
D3S2	Perfecting	SPB2	6
D3S3	Perfecting	SPB3	6
D3S3-S	Perfecting	SPB3-SS	6
D3S4	Perfecting	SPB4	6
D440	DynaQuip	FB2	6
D441	DynaQuip	MB2	6
D460	DynaQuip	FB3	6
D461	DynaQuip	MB3	6
D462	DynaQuip	SB3	6
D480	DynaQuip	FB4	6
D481	DynaQuip	MB4	6
D482	DynaQuip	SB4	6
D4B4	Perfecting	SPC4-PL	7
D4F3	Perfecting	FPC3	7
D4F4	Perfecting	FPC4	7
D4F4-S	Perfecting	FPC4-SS	7
D4F6	Perfecting	FPF5	7
D4M2	Perfecting	MPC2	7
D4M3	Perfecting	MPC3	7
D4M4	Perfecting	MPC4	7
D4M4-S	Perfecting	MPC4-SS	7
D4M6	Perfecting	MPC5	7
D4S3	Perfecting	SPC3	7
D4S4	Perfecting	SPC4	7
D4S4-S	Perfecting	SPC4-SS	7
D4S6	Perfecting	SPC5	7
D5120	DynaQuip	FC5	7
D5121	DynaQuip	MC5	7
D560	DynaQuip	FC3	7
D561	DynaQuip	MC3	7
D580	DynaQuip	FC4	7
D581	DynaQuip	MC4	7
D582	DynaQuip	SC4	7
D6F4-PCC	Perfecting	FPD4	8
D6F6-PCC	Perfecting	FPD5	8
D6F8-PCC	Perfecting	FPD6	8
D6M4-PCC	Perfecting	MPD4	8
D6M6-PCC	Perfecting	MPD5	8
D6M8-PCC	Perfecting	MPD6	8
D6S4-PCC	Perfecting	SPD4	8
D6S6-PCC	Perfecting	SPD5	8
D6S8-PCC	Perfecting	SPD6	8
D7-1	Tomco	RKA37-Q	5
D7-4	Tomco	RKB37-Q	6
D7-40	Tomco	RKB37	6
D7-5	Tomco	RKC37-Q	7
D7-50	Tomco	RKC37	7
D9-1	Tomco	RKA38-Q	5
D9-4	Tomco	RKB38-Q	6
D9-40	Tomco	RKB38	6
D9-5	Tomco	RKC38-Q	7
D9-50	Tomco	RKC38	7
DC040	DynaQuip	SVFA2	5
DC041	DynaQuip	SVMA2	5
DC060	DynaQuip	SVFA3	5
DC061	DynaQuip	SVMA3	5
DC10	Dixon	FC4	7
DC1023	Dixon	FC3	7

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
DC1026	Dixon	FC5	7
DC1044	Dixon	SC3	7
DC1045	Dixon	SC4	7
DC1046	Dixon	SC5	7
DC10S	Dixon	FC4-SS	7
DC20	Dixon	FA2	5
DC2021	Dixon	FA1	5
DC2023	Dixon	FA3	5
DC2042	Dixon	SA2	5
DC2042L	Dixon	SA2-Q-PL	5
DC2043	Dixon	SA2-PL	5
DC2044	Dixon	SA3	5
DC20S	Dixon	FA2-SS	5
DC21	Dixon	MA2	5
DC2101	Dixon	MA1	5
DC2103	Dixon	MA3	5
DC2120	DynaQuip	SVFC5	7
DC2121	DynaQuip	SVMC5	7
DC2122	DynaQuip	SVSC5	7
DC25	Dixon	MB3	6
DC2502	Dixon	MB2	6
DC2504	Dixon	MB4	6
DC26	Dixon	FB3	6
DC260	DynaQuip	SVFC3	7
DC261	DynaQuip	SVMC3	7
DC2624	Dixon	FB4	6
DC2642	Dixon	SB2	6
DC2644	Dixon	FB2	6
DC2644	Dixon	SB3	6
DC2644L	Dixon	SB3-PL	6
DC2645	Dixon	SB4	6
DC26S	Dixon	FB3-SS	6
DC280	DynaQuip	SVFC4	7
DC281	DynaQuip	SVMC4	7
DC282	DynaQuip	SVSC4	7
DC3120	DynaQuip	SVFD5	8
DC3121	DynaQuip	SVMD5	8
DC3122	DynaQuip	SVSD5	8
DC3160	DynaQuip	SVFD6	8
DC3161	DynaQuip	SVMD6	8
DC7024	Dixon	FD4-Q	8
DC7026	Dixon	FD5-Q	8
DC7028	Dixon	FD6-Q	8
DC7045	Dixon	SD4-Q	8
DC7046	Dixon	SD5-Q	8
DC7048	Dixon	SD6-Q	8
DC7104	Dixon	MD4-Q	8
DC7106	Dixon	MD5-Q	8
DC7108	Dixon	MD6-Q	8
DC9	Dixon	MC4	7
DC903	Dixon	MC3	7
DC906	Dixon	MC5	7
DCA40	DynaQuip	SVFB2	6
DCA41	DynaQuip	SVMB2	6
DCA60	DynaQuip	SVFB3	6
DCA61	DynaQuip	SVMB3	6
DCA62	DynaQuip	SVSB3	6
DCA80	DynaQuip	SVFB4	6
DCA81	DynaQuip	SVMB4	6
DCA82	DynaQuip	SVSB4	6
DCB10	Dixon	FC4-Q	7
DCB1023	Dixon	FC3-Q	7
DCB1026	Dixon	FC5-Q	7
DCB1044	Dixon	SC3-Q	7
DCB1045	Dixon	SC4-Q	7
DCB1046	Dixon	SC5-Q	7
DCB20	Dixon	FA2-Q	5
DCB2023	Dixon	FA3-Q	5
DCB2042	Dixon	SA2-Q	5
DCB2042	Dixon	SA25-B	5
DCB2044	Dixon	SA3-Q	5
DCB2044	Dixon	SA3-PL	5
DCB21	Dixon	MA2-Q	5
DCB2103	Dixon	MA3-Q	5
DCB25	Dixon	MB3-Q	6
DCB2504	Dixon	MB2-Q	6
DCB2504	Dixon	MB4-Q	6
DCB26	Dixon	FB3-Q	6
DCB2622	Dixon	FB2-Q	6
DCB2624	Dixon	FB4-Q	6
DCB2642	Dixon	SB2-Q	6
DCB2644	Dixon	SB3-Q	6
DCB2645	Dixon	SB4-Q	6
DCB9	Dixon	MC4-Q	7
DCB903	Dixon	MC3-Q	7
DCB906	Dixon	MC5-Q	7
DCP17	Dixon	MPC4	7
DCP1703	Dixon	MPC3	7
DCP1706	Dixon	MPC5	7
DCP1744	Dixon	SPC3	7
DCP1745	Dixon	SPC4	7
DCP1746	Dixon	SPC5	7
DCP18	Dixon	FPC4	7
DCP1823	Dixon	FPC3	7

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
DCP1826	Dixon	FPC5	7
DCP18S	Dixon	FPC4-SS	7
DCP20	Dixon	FPA2	5
DCP2021	Dixon	FPA1	5
DCP2023	Dixon	FPA3	5
DCP20B	Dixon	FPA2-B	5
DCP20S	Dixon	FPA2-SS	5
DCP21	Dixon	MPA2	5
DCP2101	Dixon	MPA1	5
DCP2101B	Dixon	MPA1-B	5
DCP2103	Dixon	MPA3	5
DCP2142	Dixon	SPA2	5
DCP2142B	Dixon	SPA2-B	5
DCP2142L	Dixon	SPA2-PL	5
DCP2142S	Dixon	SPA2-SS	5
DCP2143	Dixon	SPA25	5
DCP2144	Dixon	SPA3	5
DCP2144L	Dixon	SPA3-PL	5
DCP21B	Dixon	MPA2-B	5
DCP21S	Dixon	MPA2-SS	5
DCP25	Dixon	MPB3	6
DCP2502	Dixon	MPB2	6
DCP2504	Dixon	MPB4	6
DCP2542	Dixon	SPB2	6
DCP2542L	Dixon	SPB2-PL	6
DCP2544	Dixon	SPB3	6
DCP2544L	Dixon	SPB3-PL	6
DCP2545	Dixon	SPB4	6
DCP26	Dixon	FPB3	6
DCP2622	Dixon	FPB2	6
DCP2624	Dixon	FPB4	6
DCP26S	Dixon	FPB3-SS	6
DCP7024	Dixon	FPD4	8
DCP7026	Dixon	FPD5	8
DCP7028	Dixon	FPD6	8
DCP7104	Dixon	MPD4	8
DCP7106	Dixon	MPD5	8
DCP7145	Dixon	SPD4	8
DCP7146	Dixon	SPD5	8
DCP7148	Dixon	SPD6	8
DM320	DynaQuip	FA1-Q	5
DM321	DynaQuip	MA1-Q	5
DM340	DynaQuip	FA2-Q	5
DM341	DynaQuip	MA2-Q	5
DM342	DynaQuip	SA2-Q	5
DM344	DynaQuip	SA2-Q-PL	5
DM360	DynaQuip	FA3-Q	5
DM361	DynaQuip	MA3-Q	5
DM362	DynaQuip	SA3-Q	5
DM364	DynaQuip	SA3-Q-PL	5
DM440	DynaQuip	FB2-Q	6
DM441	DynaQuip	MB2-Q	6
DM460	DynaQuip	FB3-Q	6
DM461	DynaQuip	MB3-Q	6
DM462	DynaQuip	SB3-Q	6
DM480	DynaQuip	FB4-Q	6
DM481	DynaQuip	MB4-Q	6
DM482	DynaQuip	SB4-Q	6
DM5120	DynaQuip	FC5-Q	7
DM5121	DynaQuip	MC5-Q	7
DM5121	DynaQuip	FD6-Q	8
DM560	DynaQuip	FC3-Q	7
DM561	DynaQuip	MC3-Q	7
DM561	DynaQuip	FD4-Q	8
DM580	DynaQuip	FC4-Q	7
DM581	DynaQuip	MC4-Q	7
DM581	DynaQuip	FD5-Q	8
DM582	DynaQuip	SC4-Q	7
DPC7108	Dixon	MPD6	8
DW340A	DynaQuip	FA2-U	2
DW340A	Foster	FA2-U	2
DW341A	DynaQuip	MA2-U	2
DW341A	Foster	MA2-U	2
EZ-251-4FP	Parker	SVFA2	5
EZ-251-4HB	Parker	SVSA2	5
EZ-251-4MP	Parker	SVMA2	5
EZ-251-6FP	Parker	SVFA3	5
EZ-251-6HB	Parker	SVSA3	5
EZ-251-6MP	Parker	SVMA3	5
EZ-371-6FP	Parker	SVFB3	6
EZ-371-6HB	Parker	SVSB3	6
EZ-371-6MP	Parker	SVMB3	6
EZ-371-8FP	Parker	SVFB4	6
EZ-501-12FP	Parker	SVFC5	7
EZ-501-12HB	Parker	SVSC5	7
EZ-501-8FP	Parker	SVFC4	7
EZ-501-8HB	Parker	SVSC4	7
EZ-501-8MP	Parker	SVMC4	7
EZ-751-12FP	Parker	SVFD5	8
EZ-751-12MP	Parker	SVMD5	8
EZ-751-16FP	Parker	SVFD6	8
F-2UF2-S	Perfecting	FA2-SS-U	2
FM1513	Foster	SA2-Q-PL	5
FM1713	Foster	SA3-Q-PL	5

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
FM1714	Foster	SB3-Q-PL	6
FM1814	Foster	SB4-Q-PL	N/A
FM1815	Foster	SC4-Q-PL	7
FM2803	Foster	FA1-Q	5
FM2903	Foster	MA1-Q	5
FM3003	Foster	FA2-Q	5
FM3103	Foster	MA2-Q	5
FM3203	Foster	FA3-Q	5
FM3303	Foster	MA3-Q	5
FM3603	Foster	SA2-Q	5
FM3653	Foster	SA25-Q	5
FM3703	Foster	SA3-Q	5
FM4004	Foster	FB2-Q	6
FM4104	Foster	MB2-Q	6
FM4204	Foster	FB3-Q	6
FM4304	Foster	MB3-Q	6
FM4404	Foster	FB4-Q	6
FM4504	Foster	MB4-Q	6
FM4604	Foster	SB2-Q	6
FM4704	Foster	SB25-Q	6
FM4804	Foster	MPB3	6
FM4904	Foster	SB4-Q	6
FM5005	Foster	FC3-Q	7
FM5105	Foster	MC3-Q	7
FM5205	Foster	FC4-Q	7
FM5305	Foster	MC4-Q	7
FM5405	Foster	FC5-Q	7
FM5505	Foster	MC5-Q	7
FM5705	Foster	SC3-Q	7
FM5805	Foster	SC4-Q	7
FM5905	Foster	SC5-Q	7
FM6206	Foster	FD4-Q	8
FM6306	Foster	MD4-Q	8
FM6406	Foster	FC4-Q	8
FM6506	Foster	MD5-Q	8
FM6606	Foster	FD6-Q	8
FM6706	Foster	MD6-Q	8
FM6806	Foster	SD4-Q	8
FM6906	Foster	SD5-Q	8
FM7006	Foster	SD6-Q	8
FMSAA-3	Foster	RKA1-Q	5
FMSB3-3	Foster	RKA2-Q	5
FMSB5-3	Foster	RKA15-Q	5
FMSB7-3	Foster	RKA27-Q	5
FMSC7-3	Foster	RKA25-Q	5
FMSD11-3	Foster	RKA3-Q	5
FMSD11-4	Foster	RKB3-Q	6
FMSD11-5	Foster	RKC3-Q	7
FMSD7-3	Foster	RKA37-Q	5
FMSD7-4	Foster	RKB37-Q	6

Crossover



Hofmann Fluid Power Interchange A, B, C & D Series

****PLEASE NOTE** that some mfg's have higher PSI ratings than what is recommended for our products. Please be sure to check applications and psi information before crossing over, to ensure proper match. *This crossover is for reference only.*

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
H6E	Parker	SPB4	N/A
H6EP	Parker	SPB4-PL	N/A
H8C	Parker	SPA2	5
H8C-D	Parker	SPA25	5
H8CP	Parker	SPA2-PL	5
H9-C	Parker	SPA3	5
H9CP	Parker	SPA3-PL	5
LL-10	Hansen	MPA2-SS	5
LL-1000	Hansen	FA2-SS	5
LL-11	Hansen	FPA2-SS	5
LL-12	Hansen	MPA1-SS	5
LL-13	Hansen	FPA1-SS	5
LL-14	Hansen	MPA3-SS	5
LL-15	Hansen	FPA3-SS	5
M180	Tomco	MA1	5
M181	Tomco	MA2	5
M181 303	Tomco	MA2-SS	5
M181 B2	Tomco	MA2-B	5
M182	Tomco	MA3	5
M182 B2	Tomco	MA3-B	5
M183	Tomco	FA1	5
M183 303	Tomco	FA1-SS	5
M183B2	Tomco	FA1-B	5
M184	Tomco	FA2	5
M184 303	Tomco	FA2-SS	5
M184 B2	Tomco	FA2-B	5
M185	Tomco	FA3	5
M185 303	Tomco	FA3-SS	5
M185 B2	Tomco	FA3-B	5
M186	Tomco	SA2	5
M187	Tomco	SA3	5
M188	Tomco	SA25	5
M189	Tomco	SA2-PL	5
M190	Tomco	SA3-PL	5
MB3-1	Tomco	RKA2	5
MB5-1	Tomco	RKA15	5
MB7-1	Tomco	RKA27	5
MC7-1	Tomco	RKA25	5
MD11-1	Tomco	RKA3	5
MD7-1	Tomco	RKA37	5
MD9-1	Tomco	RKA38	5
P15-5	Tomco	RKC45-Q	7
P15-50	Tomco	RKC45	7
P17-5	Tomco	RKC47-Q	7
P17-50	Tomco	RKC47	7
P19-5	Tomco	RKC4-Q	N/A
P19-50	Tomco	RKC4	N/A
P320	DynaQuip	FPA1	5
P321	DynaQuip	MPA1	5
P340	DynaQuip	FPA2	5
P341	DynaQuip	MPA2	5
P342	DynaQuip	SPA2	5
P344	DynaQuip	SPA2-PL	5
P352	DynaQuip	SPA25	5
P360	DynaQuip	FPA3	5
P361	DynaQuip	MPA3	5
P362	DynaQuip	SPA3	5
P364	DynaQuip	SPA3-PL	5
P421.A	DynaQuip	MPB1	6
P440.A	DynaQuip	FPB2	6
P441.A	DynaQuip	MPB2	6
P442.A	DynaQuip	SPB2	6
P460.A	DynaQuip	FPB3	6
P461.A	DynaQuip	MPB3	6
P462.A	DynaQuip	SPB3	6
P464.A	DynaQuip	SPB3-PL	6
P480.A	DynaQuip	FPB4	6

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
P481.A	DynaQuip	MPB4	6
P482.A	DynaQuip	SPB4	6
P5120	DynaQuip	FPC5	7
P5122	DynaQuip	SPC5	7
P541	DynaQuip	MPC2	7
P560	DynaQuip	FPC3	7
P561	DynaQuip	MPC3	7
P562	DynaQuip	SPC3	7
P580	DynaQuip	FPC4	7
P581	DynaQuip	MPC4	7
P582	DynaQuip	SPC4	7
P6120	DynaQuip	FPD4	8
P6120	DynaQuip	MPD4	8
P6122	DynaQuip	SPD5	8
P682	DynaQuip	SPD4	8
PAA-3	Foster	PA1	5
PB3-3	Foster	PA2	5
PB3-3B	Foster	PA2-B	5
PB5-3	Foster	PA15	5
PB5-3B	Foster	PA15-B	5
PB7-3	Foster	PA27	5
PB7-3B	Foster	PA27-B	5
PB7-3S/S	Foster	PA27-SS	5
PC7-3	Foster	PA25	5
PD11-3	Foster	PA3	5
PD11-4	Foster	PB3	6
PD11-5	Foster	PC3	7
PD7-3	Foster	PA37	5
PD7-4	Foster	PB37	6
PD7-5	Foster	PC37	7
PD9-3	Foster	PA38	6
PD9-4	Foster	PB38	6
PD9-5	Foster	PC38	7
PP13-5	Foster	PC43	7
PP15-5	Foster	PC45	7
PP17-5	Foster	PC47	7
PP19-5	Foster	PC4	7
S22	Parker	MA2-SS	5
S23	Parker	FA2-SS	5
SAA-3	Foster	RKA1	5
SAA-3W	Foster	RKA1-B	5
SB3-3	Foster	RKA2	5
SB3-3W	Foster	RKA2-B	5
SB5-3	Foster	RKA15	5
SB5-3W	Foster	RKA15-B	5
SB7-3	Foster	RKA27	5
SB7-3S/S	Foster	RKA27-SS	5
SB7-3W	Foster	RKA27-B	5
SC7-3	Foster	RKA25	5
SC7-3W	Foster	RKA25-B	5
SD11-3	Foster	RKA3	5
SD11-3W	Foster	RKA3-B	5
SD11-4	Foster	RKB3	6
SD11-4W	Foster	RKB3-B	6
SD11-5	Foster	RKC3	7
SD11-5W	Foster	RKC3-B	7
SD7-3	Foster	RKA37	5
SD7-3W	Foster	RKA37-B	5
SD7-4	Foster	RKB37	6
SD7-4W	Foster	RKB37-B	6
SD7-5	Foster	RKC37	7
SD7-5W	Foster	RKC37-B	7
SD9-3	Foster	RKA38	5
SD9-3W	Foster	RKA38-B	5
SD9-4	Foster	RKB38	6
SD9-4W	Foster	RKB38-B	6
SD9-5	Foster	RKC38	7

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
SD9-5W	Foster	RKC38-B	7
SG1513	Foster	SA2-PL-SG	5
SG1713	Foster	SA3-PL-SG	5
SG2803	Foster	FA1-SG	5
SG2903	Foster	MA1-SG	5
SG3003	Foster	FA2-SG	5
SG3103	Foster	MA2-SG	5
SG3203	Foster	FA3-SG	5
SG3303	Foster	MA3-SG	5
SG3603	Foster	SA2-SG	5
SG3653	Foster	SA25-SG	5
SG3703	Foster	SA3-SG	5
SH2C	Parker	MPA2-SS	5
SH2C-E	Parker	MPA3-SS	5
SH3C	Parker	FPA2-SS	5
SH3C-E	Parker	FPA3-SS	5
SH8C	Parker	SPA2-SS	5
SP13-5	Foster	RKC43	7
SP13-5W	Foster	RKC43-B	7
SP15-5	Foster	RKC45	7
SP15-5W	Foster	RKC45-B	7
SP17-5	Foster	RKC47	7
SP17-5W	Foster	RKC47-B	7
SP19-5	Foster	RKC4	N/A
SP19-5W	Foster	RKC4-B	N/A
SV3003	Foster	SVFA2	5
SV3103	Foster	SVMA2	5
SV3203	Foster	SVFA3	5
SV3303	Foster	SVMA3	5
SV3603	Foster	SVSA2	5
SV3703	Foster	SVSA3	5
SV4004	Foster	SVFB2	6
SV4104	Foster	SVMB2	6
SV4204	Foster	SVFB3	6
SV4304	Foster	SVMB3	6
SV4404	Foster	SVFB4	6
SV4504	Foster	SVMB4	6
SV4804	Foster	SVSB3	6
SV4904	Foster	SVSB4	6
SV5005	Foster	SVFC3	7
SV5105	Foster	SVMC3	7
SV5205	Foster	SVFC4	7
SV5305	Foster	SVMC4	7
SV5405	Foster	SVFC5	7
SV5505	Foster	SVMC5	7
SV5705	Foster	SVSC3	7
SV5805	Foster	SVSC4	7
SV5905	Foster	SVSC5	7
SV6406	Foster	SVFD5	8
SV6506	Foster	SVMD5	8
SV6606	Foster	SVFD6	8
SV6706	Foster	SVMD6	8
SV6906	Foster	SVSD5	8
T38	Tomco	MPB1	6
T40	Tomco	MPB2	6
T400	Tomco	FB2	6
T4000	Tomco	FB2-Q	6
T410	Tomco	FPB2	6
T410	Tomco	MB2	6
T4100	Tomco	MB2-Q	6
T42	Tomco	MPB3	6
T420	Tomco	FB3	6
T4200	Tomco	FB3-Q	6
T430	Tomco	FPB3	6
T430	Tomco	MB3	6
T4300	Tomco	MB3-Q	6
T44	Tomco	MPB4	6

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
T440	Tomco	FB4	6
T4400	Tomco	FB4-Q	6
T450	Tomco	FPB4	6
T450	Tomco	MB4	6
T4500	Tomco	MB4-Q	6
T460	Tomco	SB2	6
T4600	Tomco	SB2-Q	6
T48	Tomco	SPB3	6
T480	Tomco	SB3	6
T4800	Tomco	SB3-Q	6
T4800P	Tomco	SB3-PL	6
T49	Tomco	SPB4	6
T490	Tomco	SB4	6
T4900	Tomco	SB4-Q	6
T50	Tomco	MPC2	7
T500	Tomco	FC3	7
T5000	Tomco	FC3-Q	7
T510	Tomco	MC3	7
T5100	Tomco	MC3-Q	7
T52	Tomco	MPC3	7
T520	Tomco	FC4	7
T5200	Tomco	FC4-Q	7
T53	Tomco	FP3	7
T530	Tomco	MC4	7
T5300	Tomco	MC4-Q	7
T54	Tomco	MPC4	7
T540	Tomco	FC5	7
T5400	Tomco	FC5-Q	7
T55	Tomco	FP4	7
T550	Tomco	MC5	7
T5500	Tomco	MC5-Q	7
T56	Tomco	MPC5	7
T57	Tomco	FP5	7
T570	Tomco	SC3	7
T5700	Tomco	SC3-Q	7
T580	Tomco	SC4	7
T5800	Tomco	SC4-Q	7
T59	Tomco	SP3	7
T590	Tomco	SC5	7
T5900	Tomco	SC5-Q	7
T60	Tomco	SPC4	7
T61	Tomco	SPC5	7
TB3-1	Tomco	PA2	5
TB5-1	Tomco	PA15	5
TB7-1	Tomco	PA27	5
TB7-1 303	Tomco	PA27-SS	5
TC7-1	Tomco	PA25	5
TD11-1	Tomco	PA3	5
TD11-4	Tomco	PB3	6
TD11-5	Tomco	PC3	N/A
TD15-5	Tomco	PC45	N/A
TD7-1	Tomco	PA37	5
TD7-4	Tomco	PB37	6
TD7-5	Tomco	PC37	N/A
TD9-1	Tomco	PA38	5
TD9-4	Tomco	PB38	6
TD9-5	Tomco	PC38	N/A
TP17-5	Tomco	PC47	7
TP19-5	Tomco	PC4	7
UC2-15	Tomco	MA2-U	2
UC2-16	Tomco	FA2-U	2
UC-251-4FP	Parker	FA2-U	2
UC-251-4MP	Parker	MA2-U	2
UDC20	Dixon	FA2-U	2
UDC21	Dixon	MA2-U	2

Hofmann Fluid Power Interchange L Series and T Series

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
14	Parker	TMB3	12
15	Parker	TFB3	12
160	Coilhose	TFA2	12
161	Coilhose	TFA3	12
162	Coilhose	TMA2	12
163	Coilhose	TSA2	12
165	Coilhose	TMA3	12
166	Coilhose	TSA3	12
169	Coilhose	TMA1	12
170	Coilhose	LFA2	9
172	Coilhose	LMA2	9
590	Coilhose	TFB3	12
591	Coilhose	TMB3	12

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
593	Coilhose	TMB2	12
598	Coilhose	TSB3	12
783	Milton	TMPA2	12
784	Milton	TTPA2	12
785	Milton	TFA3	12
786	Milton	TMA2	12
790	Milton	LFA2	9
791	Milton	LMPA2	9
792	Milton	LFA2	9
793	Milton	LMPA1	9
1100	Tomco	LMA2	9
1101	Tomco	LMA2	9
1102	Tomco	LMA1	9

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
1106	Tomco	LMPA1	9
1109	Tomco	LFA2	9
1110	Tomco	LMPA2	9
1601	Coilhose	TMPA2	12
1602	Coilhose	TFA2	12
1603	Coilhose	TMPA3	12
1604	Coilhose	TMPA1	12
1605	Coilhose	TFA3	12
1606	Coilhose	TSPA2	12
1608	Coilhose	TSPA3	12
1701	Coilhose	LMPA2	9
1702	Coilhose	LFA2	9
1803	Milton	TFB2	12

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
1804	Milton	TMB2	12
1805	Milton	TFB3	12
1806	Milton	TMB3	12
1807	Milton	TMPB3	12
1808	Milton	TFPB3	12
1809	Milton	TMPB2	12
1810	Milton	TFPB2	12
2150	Tomco	TSPA2-PL	12
2152	Tomco	TMPA1	12
2153	Tomco	TFA2	12
2154	Tomco	TMPA2	12
2155	Tomco	TFA2	12
2156	Tomco	TMPA3	12



Crossover

Hofmann Fluid Power Interchange L Series and T Series

*** PLEASE NOTE** that some mfg's have higher PSI ratings than what is recommended for our products. Please be sure to check applications and psi information before crossing over, to ensure proper match. *This crossover is for reference only.*

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
2157	Tomco	TFFA3	12
2160	Tomco	TSPA3-PL	12
2164	Tomco	TSPA2	12
2166	Tomco	TSPA3	12
5901	Coilhose	TMPB3	12
5902	Coilhose	TFFB3	12
5903	Coilhose	TMPB2	12
5904	Coilhose	TFFB2	12
5906	Coilhose	TSPB3	12
0C	Parker	TMPA1	12
0E	Parker	TMPB2	12
14-5B	Parker	TSB3	12
14-5BP	Parker	TSB3-PL	12
14-6B	Parker	TSB4	12
14C	Parker	TMB2	12
14F	Parker	TMB4	12
15C	Parker	TFB2	12
15F	Parker	TFB4	12
1606L	Coilhose	TSPA2-PL	12
1608L	Coilhose	TSPA3-PL	12
163L	Coilhose	TSA2-PL	12
166L	Coilhose	TSA3-PL	12
1746-6	Milton	TSB3-PL	12
1783-4	Milton	TSPA2-PL	12
1783-6	Milton	TSPA3-PL	12
1786-4	Milton	TSA2-PL	12
1786-6	Milton	TSA3-PL	12
1806-6	Milton	TSB3	12
1807-6	Milton	TSPB3	12
1C	Parker	TFFA1	12
1E	Parker	TFFB2	12
21AP-25H	Hansen	TSPA2	12
21AP-25M	Hansen	TMPA2	12
21AP-31H	Hansen	TSPA25	12
21AP-37F	Hansen	TFB4	12
21AP-37F	Hansen	TFFA2	12
21AP-37H	Hansen	TFFA3	12
21AP-37H	Hansen	TSPA3	12
21AP-37M	Hansen	TMPA3	12
21AS-25F	Hansen	TFA1	12
21AS-25H	Hansen	TSA2	12
21AS-25HP	Hansen	TSA2-PL	12
21AS-25M	Hansen	TMA2	12
21AS-31H	Hansen	TSA25	12
21AS-37F	Hansen	TFA2	12
21AS-37H	Hansen	TSA3	12
21AS-37HP	Hansen	TSA3-PL	12
21AS-37M	Hansen	TMA3	12
2C	Parker	TMPA2	12
2C-E	Parker	TMPA3	12
2E	Parker	TMPB3	12
2JB2-B	Perfecting	TSA2-PL	12
2JB3-B	Perfecting	TSA3-PL	12
2JF2-B	Perfecting	TFA2	12
2JF3-B	Perfecting	TFA3	12
2JM1-B	Perfecting	TFA1	12
2JM1-B	Perfecting	TMA1	12
2JM2-B	Perfecting	TMA2	12
2JM3-B	Perfecting	TMA3	12
2JS2.5-B	Perfecting	TSA25	12
2JS2-B	Perfecting	TSA2	12
2JS3-B	Perfecting	TSA3	12
2LF2-B	Perfecting	LFA2	9
2LM2-B	Perfecting	LMA2	9
31AP-25F	Hansen	TFFB2	12
31AP-25M	Hansen	TMPB2	12
31AP-37F	Hansen	TFFB3	12
31AP-37H	Hansen	TSPB3	12
31AP-37M	Hansen	TMPB3	12
31AS-25F	Hansen	TFA3	12
31AS-25M	Hansen	TMB2	12
31AS-37F	Hansen	TFB2	12
31AS-37H	Hansen	TSB3	12
31AS-37M	Hansen	TMB3	12
31AS-50F	Hansen	TFB3	12
31AS-50H	Hansen	TSB4	12
31AS-50M	Hansen	TMB4	12
3C	Parker	TFFA2	12
3C-E	Parker	TFFA3	12
3E	Parker	TFFB3	12
3JB3	Perfecting	TSB3-PL	12
3JF2	Perfecting	TFB2	12
3JF3	Perfecting	TFB3	12
3JF4	Perfecting	TFB4	12
3JM2	Perfecting	TMB2	12
3JM3	Perfecting	TMB3	12
3JM4	Perfecting	TMB4	12
3JS2	Perfecting	TSB2	12
3JS3	Perfecting	TSB3	12

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
3JS4	Perfecting	TSB4	12
598L	Coilhose	TSB3-PL	12
5E	Parker	TSPB3	12
5EP	Parker	TSPB3-PL	12
783-4	Milton	TSPA2	12
783-6	Milton	TSPA3	12
786-4	Milton	TSA2	12
786-6	Milton	TSA3	12
8C	Parker	TSPA2	12
8C-D	Parker	TSPA25	12
8CP	Parker	TSPA2-PL	12
91455K	Mcmaster	LFA2	9
91455K21	Mcmaster	LMA2	9
91455K31	Mcmaster	LFFA2	9
91455K31	Mcmaster	LMPA2	9
95815K11	Mcmaster	TMA1	12
95815K13	Mcmaster	TMA3	12
95815K14	Mcmaster	TMB2	12
95815K16	Mcmaster	TMB4	12
95815K21	Mcmaster	TFA1	12
95815K23	Mcmaster	TFA3	12
95815K24	Mcmaster	TFB2	12
95815K26	Mcmaster	TFB4	12
95815K33	Mcmaster	TSA3	12
95815K36	Mcmaster	TSB4	12
95815K41	Mcmaster	TMPA1	12
95815K43	Mcmaster	TMPA3	12
95815K44	Mcmaster	TMPB2	12
95815K51	Mcmaster	TFFA1	12
95815K53	Mcmaster	TFFA3	12
95815K54	Mcmaster	TFFB2	12
95815K61	Mcmaster	TMA2	12
95815K62	Mcmaster	TFA2	12
95815K63	Mcmaster	TMB3	12
95815K64	Mcmaster	TFB3	12
95815K67	Mcmaster	TSA2	12
95815K68	Mcmaster	TSB3	12
95815K69	Mcmaster	TMPA2	12
95815K71	Mcmaster	TFFA2	12
95815K72	Mcmaster	TMPB3	12
95815K73	Mcmaster	TFFB3	12
95815K76	Mcmaster	TSPA2	12
95815K77	Mcmaster	TSPB3	12
95815K83	Mcmaster	TSPA3	12
9C	Parker	TSPA3	12
9CP	Parker	TSPA3-PL	12
A2180	Tomco	TMA1	12
A2181	Tomco	TMA2	12
A2182	Tomco	TMA3	12
A2183	Tomco	TFA1	12
A2184	Tomco	TFA2	12
A2185	Tomco	TFA3	12
A2186	Tomco	TSA2	12
A2187	Tomco	TSA25	12
A2188	Tomco	TSA3	12
A2189	Tomco	TSA2-PL	12
A2190	Tomco	TSA3-PL	12
B10-3B	Parker	TSA2	12
B10-3BP	Parker	TSA2-PL	12
B10-4B	Parker	TSA25	12
B10-5B	Parker	TSA3	12
B10-5BP	Parker	TSA3-PL	12
B12	Parker	TMA2	12
B12A	Parker	TMA1	12
B12E	Parker	TMA3	12
B13	Parker	TFA2	12
B13A	Parker	TFA1	12
B13E	Parker	TFA3	12
B2C	Parker	TMPA2-B	12
B-2JF1	Breco	TFA1	12
B-2JF2	Breco	TFA2	12
B-2JF3	Breco	TFA3	12
B-2JM1	Breco	TMA1	12
B-2JM2	Breco	TMA2	12
B-2JM3	Breco	TMA3	12
B-2JPS2-B	Breco	TSA2-PL	12
B-2JPS3-B	Breco	TSA3-PL	12
B-2JS2-B	Breco	TSA2	12
B-2JS3-B	Breco	TSA3	12
B-2LM2-B	Breco	LMA2	9
B-2LM3-B	Breco	LMA3	9
B-3JF2	Breco	TFB2	12
B-3JF3	Breco	TFB3	12
B-3JF4	Breco	TFB4	12
B-3JM2	Breco	TMB2	12
B-3JM3	Breco	TMB3	12
B-3JM4	Breco	TMB4	12
B-3JPS3-S	Breco	TSB3-PL	12
B72	Parker	LMA2	9

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
B73	Parker	LFA2	9
B-J2F1	Breco	TFFA1	12
B-J2F2	Breco	TFFA2	12
B-J2F3	Breco	TFFA3	12
B-J2M1	Breco	TMPA1	12
B-J2M2	Breco	TMPA2	12
B-J2M3	Breco	TMPA3	12
B-J2PS2-S	Breco	TSPA2-PL	12
B-J2PS3-S	Breco	TSPA3-PL	12
B-J2S2-S	Breco	TSPA2	12
B-J2S3-S	Breco	TSPA3	12
B-J3F2	Breco	TFFB2	12
B-J3F3	Breco	TFFB3	12
B-J3M2	Breco	TMPB2	12
B-J3M3	Breco	TMPB3	12
B-J3PS3-S	Breco	TSPB3-PL	12
B-J3S3-S	Breco	TSPB3	12
B-JS3-S	Breco	TSB3	12
B-JS4-S	Breco	TSB4	12
B-L2F2-B	Breco	LFA2	9
B-L2F2-B	Breco	LFFA2	9
B-L2F3-B	Breco	LFA3	9
B-L2M2-S	Breco	LMPA2	9
DC1	Dixon	TMA2	12
DC101	Dixon	TMA1	12
DC103	Dixon	TMA3	12
DC2	Dixon	TFA2	12
DC221	Dixon	TFA1	12
DC223	Dixon	TFA3	12
DC242	Dixon	TSA2	12
DC242L	Dixon	TSA2-PL	12
DC243	Dixon	TSA25	12
DC244	Dixon	TSA3	12
DC244L	Dixon	TSA3-PL	12
DC27	Dixon	LMA2	9
DC28	Dixon	LFA2	9
DC5	Dixon	TMB3	12
DC504	Dixon	TMB4	12
DC6	Dixon	TFB3	12
DC624	Dixon	TFB4	12
DC642	Dixon	TSB2	12
DC642	Dixon	TSB3	12
DC644L	Dixon	TSB3-PL	12
DC645	Dixon	TSB4	12
DC7	Dixon	TMB2	12
DC8	Dixon	TFB2	12
DCP1	Dixon	TMPA2	12
DCP101	Dixon	TMPA1	12
DCP103	Dixon	TMPA3	12
DCP142	Dixon	TSPA2	12
DCP142L	Dixon	TSPA2-PL	12
DCP143	Dixon	TSPA25	12
DCP144	Dixon	TSPA3	12
DCP144L	Dixon	TSPA3-PL	12
DCP2	Dixon	TFFA2	12
DCP221	Dixon	TFFA1	12
DCP223	Dixon	TFFA3	12
DCP27	Dixon	LMPA2	9
DCP28	Dixon	LFFA2	9
DCP5	Dixon	TMPB3	12
DCP544	Dixon	TSPB3	12
DCP6	Dixon	TFFB3	12
DCP7	Dixon	TMPB2	12
DCP8	Dixon	TFFB2	12
J2B2	Perfecting	TSPA2-PL	12
J2B3	Perfecting	TSPA3-PL	12
J2F1	Perfecting	TFFA1	12
J2F2	Perfecting	TFFA2	12
J2F3	Perfecting	TFFA3	12
J2M1	Perfecting	TMPA1	12
J2M2	Perfecting	TMPA2	12
J2M3	Perfecting	TMPA3	12
J2S2	Perfecting	TSPA2	12
J2S2.5	Perfecting	TSPA25	12
J2S3	Perfecting	TSPA3	12
J3B3	Perfecting	TSPB3-PL	12
J3F2	Perfecting	TFFB2	12
J3F3	Perfecting	TFFB3	12
J3M2	Perfecting	TMPB2	12
J3M3	Perfecting	TMPB3	12
J3S3	Perfecting	TSPB3	12
L2C	Parker	LMPA2	9
L2F2-PCC	Perfecting	LFFA2	9
L2M2-PCC	Perfecting	LMPA2	9
L3C	Parker	LFFA2	9
LN10	Foster	LMPA2	9
LN11	Foster	LFFA2	9
LN12	Foster	LMPA1	9
LN1513	Foster	LSA2-PL	9

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
LN1713	Foster	LSA3-PL	9
LN2803	Foster	LFA1	9
LN2903	Foster	LMA1	9
LN3003	Foster	LFA2	9
LN3103	Foster	LMA2	9
LN3203	Foster	LFA3	9
LN3303	Foster	LMA3	9
LN3603	Foster	LSA2	9
LN3653	Foster	LSA25	9
LN3703	Foster	LSA3	9
N/A	Parker	TSB2	12
N/A	Parker	TSB25	12
N/A	Hansen	TSB2	12
N/A	Hansen	TSB25	12
N/A	Hansen	TSB3-PL	12
N/A	Tomco	TMB2	12
N/A	Tomco	TMB4	12
N/A	Tomco	TMPB3	12
N/A	Tomco	TSB2	12
N/A	Tomco	TSB25	12
N/A	Breco	TSA25	12
N/A	Breco	TSB2	12
N/A	Breco	TSB25	12
PT40	Tomco	TMPB2	12
PT400	Tomco	TFB2	12
PT41	Tomco	TFFB2	12
PT420	Tomco	TFB3	12
PT43	Tomco	TFFB3	12
PT430	Tomco	TMB3	12
PT440	Tomco	TFB4	12
PT48	Tomco	TSPB3	12
PT480	Tomco	TSB3	12
PT480P	Tomco	TSB3-PL	12
PT490	Tomco	TSB4	12
S2C	Parker	TMPA2-SS	12
SL2C	Parker	LMPA2-SS	12
SL3C	Parker	LFFA2-SS	9
TF10	Foster	TMPA2	12
TF11	Foster	TFFA2	12
TF12	Foster	TMPA1	12
TF13	Foster	TFFA1	12
TF14	Foster	TMPA3	12
TF15	Foster	TFFA3	12
TF1513	Foster	TSA2-PL	12
TF16	Foster	TSPA2	12
TF165	Foster	TSPA25	12
TF17	Foster	TSA3-PL	12
TF1713	Foster	TSA3-PL	12
TF1714	Foster	TSB3-PL	12
TF2803	Foster	TFA1	12
TF2903	Foster	TMA1	12
TF3003	Foster	TFA2	12
TF3103	Foster	TMA2	12
TF3203	Foster	TFA3	12
TF3303	Foster	TMA3	12
TF3603	Foster	TSA2	12
TF3653	Foster	TSA25	12
TF3703	Foster	TSA3	12
TF40	Foster	TMPB2	12
TF4004	Foster	TFB2	12
TF41	Foster	TFFB2	12
TF4104	Foster	TMB2	12
TF42	Foster	TMPB3	

Crossover



Hofmann Fluid Power Interchange RL Series and TL Series

****PLEASE NOTE** that some mfg's have higher PSI ratings than what is recommended for our products. Please be sure to check applications and psi information before crossing over, to ensure proper match. *This crossover is for reference only.*

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
2047	Schrader	TLFPA1	11
1054-12	Schrader	TLFC2	11
1095-11	Schrader	TLMPC3	11
1095-12	Schrader	TLFC3	11
1096-11	Schrader	TLFPC2	11
1097-11	Schrader	TLSPC3	11
1098-11	Schrader	TLSPC4	11
1461-11	Schrader	TLMP4	11
22-R27	Hansen	RLSB4	10
2-L10	Hansen	RLMPB1	10
2-L15	Hansen	RLMPB2	10
2-L16	Hansen	RLFPB2	10
2-L17	Hansen	RLSPB2	10
2-L20	Hansen	RLMPB3	10
2-L21	Hansen	RLFPB3	10
2-L22	Hansen	RLSPB3	10
2-L26	Hansen	RLFPB4	10
2-L27	Hansen	RLMPB4	10
2-L27	Hansen	RLSPB4	10
2L38	Foster	RLMPB1	10
2L40	Foster	RLMPB2	10
2L41	Foster	RLFPB2	10
2L42	Foster	RLMPB3	10
2L43	Foster	RLFPB3	10
2L44	Foster	RLMPB4	10
2L45	Foster	RLFPB4	10
2L46	Foster	RLSPB2	10
2L48	Foster	RLSPB3	10
2L49	Foster	RLSPB4	10
2-R15	Hansen	RLMB2	10
2-R16	Hansen	RLFB2	10
2-R17	Hansen	RLSB2	10
2-R20	Hansen	RLMB3	10
2-R21	Hansen	RLFB3	10
2-R22	Hansen	RLSB3	10
2-R25	Hansen	RLMB4	10
2-R26	Hansen	RLFB4	10
2R4004	Foster	RLFB2	10
2R4104	Foster	RLMB2	10
2R4204	Foster	RLFB3	10
2R4304	Foster	RLMB3	10
2R4404	Foster	RLFB4	10
2R4504	Foster	RLMB4	10
2R4604	Foster	RLSB2	10
2R4704	Foster	RLSB25	10
2R4804	Foster	RLSB3	10
2R4904	Foster	RLSB4	10
2SHDF3	Dixon	TLFA3	11
2SHDF3	Perfecting	TLFA3	11
2SHDM2	Dixon	TLFA2	11
2SHDM2	Dixon	TLMA2	11
2SHDM2	Perfecting	TLFA2	11
2SHDM2	Perfecting	TLMA2	11

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
2SHDM3	Dixon	TLMA3	11
2SHDM3	Perfecting	TLMA3	11
2SHDS2	Dixon	TLFA2	11
2SHDS2	Perfecting	TLFA2	11
2SHDS3	Dixon	TLFA3	11
2SHDS3	Perfecting	TLFA3	11
3060C-12	Schrader	TLMA2	11
3061C-12	Schrader	TLMA3	11
3080-12	Schrader	TLMA3	11
3081-12	Schrader	TLMA3	11
3-L16	Hansen	RLFPC2	10
3-L17	Hansen	RLMPC2	10
3-L17	Hansen	RLSPC2	10
3-L22	Hansen	RLMPC3	10
3-L22	Hansen	RLSPC3	10
3-L26	Hansen	RLFPC4	10
3-L27	Hansen	RLMPC4	10
3-L27	Hansen	RLSPC4	10
3-L32	Hansen	RLMPC5	10
3-L32	Hansen	RLSPC5	10
3L50	Foster	RLMPC2	10
3L51	Foster	RLFPC2	10
3L52	Foster	RLMPC3	10
3L54	Foster	RLMPC4	10
3L55	Foster	RLFPC4	10
3L56	Foster	RLMPC5	10
3L58	Foster	RLSPC2	10
3L59	Foster	RLSPC3	10
3L60	Foster	RLSPC4	10
3L61	Foster	RLSPC5	10
3-R16	Hansen	RLFC2	10
3-R17	Hansen	RLSC2	10
3-R20	Hansen	RLMC3	10
3-R21	Hansen	RLFC3	10
3-R22	Hansen	RLSC3	10
3-R25	Hansen	RLMC4	10
3-R26	Hansen	RLFC4	10
3-R27	Hansen	RLSC4	10
3-R30	Hansen	RLMC5	10
3-R31	Hansen	RLFC5	10
3-R32	Hansen	RLSC5	10
3R4015	Foster	RLFC2	10
3R4905	Foster	RLMC2	10
3R5005	Foster	RLFC3	10
3R5105	Foster	RLMC3	10
3R5205	Foster	RLFC4	10
3R5305	Foster	RLMC4	10
3R5405	Foster	RLFC5	10
3R5505	Foster	RLMC5	10
3R5605	Foster	RLSC2	10
3R5705	Foster	RLSC3	10
3R5805	Foster	RLSC4	10
3R5905	Foster	RLSC5	10

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
4SHDF3	Dixon	TLFC3	11
4SHDF3	Perfecting	TLFC3	11
4SHDM3	Dixon	TLMC3	11
4SHDM3	Perfecting	TLMC3	11
4SHDM4	Dixon	TLMA2	11
4SHDM4	Perfecting	TLMA2	11
4SHDS3	Dixon	TLSC3	11
4SHDS3	Perfecting	TLSC3	11
4SHDS4	Dixon	TLSC4	11
4SHDS4	Perfecting	TLSC4	11
5606T11	McMaster	TLMA2-SS	11
5606T12	McMaster	TLFA2-SS	11
5606T13	McMaster	TLMA2-SS	11
5606T14	McMaster	TLFA2-SS	11
8050-11	Schrader	TLMA2	11
8051-11	Schrader	TLMA1	11
8052C-12	Schrader	TLFA2	11
8278-11	Schrader	TLFA2	11
8624-11	Schrader	TLMPC2	11
8787-11	Schrader	TLSPA2	11
8788-11	Schrader	TLSPA3	11
SHD10	Foster	TLMA2	11
SHD10S/S	Foster	TLMA2-SS	11
SHD11	Foster	TLFA2	11
SHD11S/S	Foster	TLFA2-SS	11
SHD12	Foster	TLMA1	11
SHD13	Foster	TLFA1	11
SHD16	Foster	TLSPA2	11
SHD17	Foster	TLSPA3	11
SHD2803	Foster	TLFA1	11
SHD2903	Foster	TLMA1	11
SHD2F2	Dixon	TLFA2	11
SHD2F2	Perfecting	TLFA2	11
SHD2M1	Dixon	TLFA1	11
SHD2M1	Perfecting	TLFA1	11
SHD2S2	Dixon	TLSPA2	11
SHD2S2	Perfecting	TLSPA2	11
SHD2S3	Dixon	TLSPA3	11
SHD2S3	Perfecting	TLSPA3	11
SHD3003	Foster	TLFA2	11
SHD3003S/S	Foster	TLFA2-SS	11
SHD3103	Foster	TLMA2	11
SHD3103S/S	Foster	TLMA2-SS	11
SHD3203	Foster	TLFA3	11
SHD3303	Foster	TLMA3	11
SHD3603	Foster	TLFA2	11
SHD3653	Foster	TLFA25	11
SHD3703	Foster	TLFA3	11
SHD4015	Foster	TLFC2	11
SHD4F3	Dixon	TLFPC2	11
SHD4F3	Perfecting	TLFPC2	11
SHD4M2	Dixon	TLMPC2	11
SHD4M2	Perfecting	TLMPC2	11

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
SHD4M3	Dixon	TLMPC3	11
SHD4M3	Perfecting	TLMPC3	11
SHD4M4	Dixon	TLMPC4	11
SHD4M4	Perfecting	TLMPC4	11
SHD4S3	Dixon	TLSPC3	11
SHD4S3	Perfecting	TLSPC3	11
SHD4S4	Dixon	TLSPC4	11
SHD4S4	Perfecting	TLSPC4	11
SHD50	Foster	TLMPC2	11
SHD5005	Foster	TLFC3	11
SHD5105	Foster	TLMC3	11
SHD52	Foster	TLMPC3	11
SHD53	Foster	TLFPC2	11
SHD5305	Foster	TLMPC4	11
SHD54	Foster	TLMPC4	11
SHD5505	Foster	TLMC5	11
SHD5705	Foster	TLSC3	11
SHD5805	Foster	TLSC4	11
SHD59	Foster	TLSPC3	11
SHD5905	Foster	TLSC5	11
SHD60	Foster	TLSPC4	11
SHDM1	Dixon	TLMA1	11
SHDM1	Perfecting	TLMA1	11
SHDM2	Dixon	TLMA2	11
SHDM2	Perfecting	TLMA2	11
TL-251-4FP	Parker	TLFA2	11
TL-251-4MP	Parker	TLMA2	11
TL-251-6MP	Parker	TLMA3	11
TL-254-2FP	Parker	TLFA1	11
TL-254-2MP	Parker	TLMA1	11
TL-254-4FP	Parker	TLFA2	11
TL-254-4HB	Parker	TLSPA2	11
TL-254-4MP	Parker	TLSPA2	11
TL-254-6HB	Parker	TLSPA3	11
TL-501-12FP	Parker	TLFC5	11
TL-501-6FP	Parker	TLFC3	11
TL-501-6MP	Parker	TLMC3	11
TL-501-8FP	Parker	TLFC4	11
TL-501-8MP	Parker	TLMPC4	11
TL-504-12MP	Parker	TLMPC5	11
TL-504-4FP	Parker	TLFPC2	11
TL-504-4MP	Parker	TLMPC2	11
TL-504-6FP	Parker	TLFPC3	11
TL-504-6HB	Parker	TLSPC3	11
TL-504-6MP	Parker	TLMPC3	11
TL-504-8MP	Parker	TLSPC4	11
TL-504-8MP	Parker	TLMPC4	11
TL-15	Tomco	TLMA2	11
TL-16	Tomco	TLFA2	11
TL-20	Tomco	TLMA3	11
TL-15	Tomco	TLMA2	11
TL-16	Tomco	TLFA2	11

Hofmann Fluid Power Interchange G Series

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
2-1-16	Hansen	2GP	13
2-A-16	Hansen	2GS	13
2KF2	Perfecting	2GS	13
3-1-21	Hansen	3GP	13
3-A-21	Hansen	3GS	13
3KF3	Perfecting	3GS	13
4-1-26	Hansen	4GP	13
4-A-26	Hansen	4GS	13
4KF4	Perfecting	4GS	13
51335K51	McMaster	2GS	13
51335K52	McMaster	3GS	13
51335K53	McMaster	4GS	13
51335K54	McMaster	6GS	13
51335K55	McMaster	8GS	13
51335K61	McMaster	2GP	13
51335K62	McMaster	3GP	13
51335K63	McMaster	4GP	13
51335K64	McMaster	6GP	13
51335K65	McMaster	8GP	13
56-200	Dixon	2GS	13
56-300	Dixon	3GS	13
56-400	Dixon	4GS	13
56-660	Dixon	6GS	13
56-800	Dixon	8GP	13
57-200	Dixon	2GP	13

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
57-300	Dixon	3GP	13
57-400	Dixon	4GP	13
57-660	Dixon	6GP	13
57-800	Dixon	8GS	13
6-1-31	Hansen	6GP	13
61C12-12F	Snapitite	6GS	13
61C16-16F	Snapitite	8GS	13
61C4-4F	Snapitite	2GS	13
61C6-6F	Snapitite	3GS	13
61C8-8F	Snapitite	4GS	13
61N12-12F	Snapitite	6GP	13
61N16-16F	Snapitite	8GP	13
61N4-4F	Snapitite	2GP	13
61N6-6F	Snapitite	3GP	13
61N8-8F	Snapitite	4GP	13
6601-12-12	Parker	6GP	13
6601-16-16	Parker	8GP	13
6601-4-4	Parker	2GP	13
6601-6-6	Parker	3GP	13
6601-8-10	Parker	4GP	13
6602-12-12	Parker	6GS	13
6602-16-16	Parker	8GS	13
6602-4-4	Parker	2GS	13
6602-6-6	Parker	3GS	13
6602-8-10	Parker	4GS	13

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
6-A-31	Hansen	6GS	13
6KF6	Perfecting	6GS	13
8-1-36	Hansen	8GP	13
8-A-36	Hansen	8GS	13
8KF8	Perfecting	8GS	13
AF15-04	Foster	2GP	13
AF15-06	Foster	3GP	13
AF15-08	Foster	4GP	13
AF15-12	Foster	6GP	13
AF15-16	Foster	8GP	13
AM15-04	Foster	2GS	13
AM15-06	Foster	3GS	13
AM15-08	Foster	4GS	13
AM15-12	Foster	6GS	13
AM15-16	Foster	8GS	13
ANV12NPTF	Faster	4GP	13
ANV12NPTM	Faster	4GS	13
ANV1NPT1F	Faster	8GP	13
ANV1NPT1M	Faster	8GS	13
CA5602-16	Tomco	2GP	13
CA5603-21	Tomco	3GP	13
CA5604-26	Tomco	4GP	13
CA5606-31	Tomco	6GP	13
CA5608-36	Tomco	8GP	13
K2F2	Perfecting	2GP	13

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
K3F3	Perfecting	3GP	13
K4F4	Perfecting	4GP	13
K6F6	Perfecting	6GP	13
K8F8	Perfecting	8GP	13
PA5602-16	Tomco	2GS	13
PA5603-21	Tomco	3GS	13
PA5604-26	Tomco	4GS	13
PA5606-31	Tomco	6GS	13
PA5608-36	Tomco	8GS	13
S561-2	Safeway	2GP	13
S561-3	Safeway	3GP	13
S561-4	Safeway	4GP	13
S561-6	Safeway	6GP	13
S561-8	Safeway	8GP	13
S565-2	Safeway	2GS	13
S565-2	Safeway	3GS	13
S565-4	Safeway	4GS	13
S565-6	Safeway	6GS	13
S565-8	Safeway	8GS	13



Crossover

Hofmann Fluid Power Interchange H Series

**** PLEASE NOTE** that some mfg's have higher PSI ratings than what is recommended for our products. Please be sure to check applications and psi information before crossing over, to ensure proper match. **This crossover is for reference only.**

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
10-575-1405	Cejn	4HS	14
10-575-6405	Cejn	4HP	14
10-675-1401	Cejn	6HS	14
10-675-6401	Cejn	6HP	14
10-775-1403	Cejn	8HP-SS	14
10-775-6403	Cejn	6HS-SS	14
16-263	Dixon	2HS	14
16-363	Dixon	3HS	14
16-463	Dixon	4HS	14
16-663	Dixon	6HS	14
16-863	Dixon	8HS	14
17-262	Dixon	2HP	14
17-363	Dixon	3HP	14
17-463	Dixon	4HP	14
17-663	Dixon	6HP	14
17-863	Dixon	8HP	14
1DFS1-B	Breco	1HSB	14
1DFS1-SS	Breco	1HS	14
1DFSP1-SS	Breco	1HS-SS	14
1-H11	Hansen	1HS	14
1HF1	Perfecting	1HS	14
1HF1B	Perfecting	1HSB	14
1HF1-S	Perfecting	1HS-SS	14
1-K11	Hansen	1HP	14
2DSF2-B	Breco	2HSB	14
2DSF2-SS	Breco	2HS	14
2-H16	Hansen	2HS	14
2HF2	Perfecting	2HS	14
2HF2-B	Perfecting	2HSB	14
2HF2-S	Perfecting	2HS-SS	14
2-K16	Hansen	2HP	14
3DFS3-B	Breco	3HSB	14
3DFS3-S	Breco	3HS	14
3DFS3-SS	Breco	3HS-SS	14
3-H21	Hansen	3HS	14
3HF3	Perfecting	3HS	14
3HF3B	Perfecting	3HSB	14
3HF3-S	Perfecting	3HS-SS	14
3-K21	Hansen	3HP	14
4DSF4-B	Breco	4HSB	14
4DSF4-S	Breco	4HS	14
4DSF4-SS	Breco	4HS-SS	14
4-H26	Hansen	4HS	14
4HF4	Perfecting	4HS	14
4HF4B	Perfecting	4HSB	14
4HF4-S	Perfecting	4HS-SS	14
4-K26	Hansen	4HP	14
5247K18	McMaster	1HS-SS	14
5247K21	McMaster	2HS-SS	14
5247K22	McMaster	3HS-SS	14
5247K23	McMaster	4HS-SS	14
5247K24	McMaster	6HS-SS	14
5247K25	McMaster	8HS-SS	14
5247K28	McMaster	1HP-SS	14
5247K31	McMaster	2HP-SS	14
5247K32	McMaster	3HP-SS	14
5247K33	McMaster	4HP-SS	14
5247K34	McMaster	6HP-SS	14
5247K35	McMaster	8HP-SS	14
52495K38	McMaster	1HSB	14
52495K41	McMaster	2HSB	14
52495K43	McMaster	3HSB	14
52495K45	McMaster	4HSB	14
52495K47	McMaster	6HSB	14
52495K49	McMaster	8HSB	14
52495K58	McMaster	1HPB	14
52495K61	McMaster	2HPB	14
52495K63	McMaster	3HPB	14
52495K65	McMaster	4HPB	14
52495K67	McMaster	6HPB	14
52495K69	McMaster	8HPB	14

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
6DFS6-B	Breco	6HSB	14
6DFS6-S	Breco	6HS	14
6DFS6-SS	Breco	6HS-SS	14
6-H31	Hansen	6HS	14
6HF6	Perfecting	6HS	14
6HF6B	Perfecting	6HSB	14
6HF6-S	Perfecting	6HS-SS	14
6-K31	Hansen	6HP	14
8-H36	Hansen	8HS	14
8HF8	Perfecting	8HS	14
8HF8B	Perfecting	8HSB	14
8HF8-S	Perfecting	8HS-SS	14
8-K36	Hansen	8HP	14
95825K75	McMaster	1HP	14
95825K79	McMaster	1HS	14
95825K81	McMaster	2HS	14
95825K82	McMaster	3HS	14
95825K83	McMaster	4HS	14
95825K84	McMaster	6HS	14
95825K85	McMaster	8HS	14
95825K86	McMaster	2HP	14
95825K87	McMaster	3HP	14
95825K88	McMaster	4HP	14
95825K89	McMaster	6HP	14
95825K91	McMaster	8HP	14
B16-262	Dixon	2HSB	14
B16-363	Dixon	3HSB	14
B16-463	Dixon	4HSB	14
B16-663	Dixon	6HSB	14
B16-863	Dixon	8HSB	14
B17-262	Dixon	2HPB	14
B17-363	Dixon	3HPB	14
B17-463	Dixon	4HPB	14
B17-663	Dixon	6HPB	14
B17-863	Dixon	8HPB	14
B1-H11	Hansen	1HSB	14
B1-K11	Hansen	1HPB	14
B2-H16	Hansen	2HSB	14
B2-K16	Hansen	2HPB	14
B3-H21	Hansen	3HSB	14
B3-K21	Hansen	3HPB	14
B4-H26	Hansen	4HSB	14
B4-K26	Hansen	4HPB	14
B6-H31	Hansen	6HSB	14
B6-K31	Hansen	6HPB	14
B8-H36	Hansen	8HSB	14
B8-K36	Hansen	8HPB	14
BH1-60	Parker	1HSB	14
BH1-61	Parker	1HPB	14
BH2-60	Parker	2HSB	14
BH2-61	Parker	2HPB	14
BH3-60	Parker	3HSB	14
BH3-61	Parker	3HPB	14
BH4-60	Parker	4HSB	14
BH4-61	Parker	4HPB	14
BH6-60	Parker	6HSB	14
BH6-61	Parker	6HPB	14
BH8-60	Parker	8HSB	14
BH8-61	Parker	8HPB	14
BS101-1	Safeway	1HPB	14
BS101-2	Safeway	2HPB	14
BS101-3	Safeway	3HPB	14
BS101-4	Safeway	4HPB	14
BS101-6	Safeway	6HPB	14
BS101-8	Safeway	8HPB	14
BS105-1	Safeway	1HSB	14
BS105-2	Safeway	2HSB	14
BS105-3	Safeway	3HSB	14
BS105-4	Safeway	4HSB	14
BS105-6	Safeway	6HSB	14
BS105-8	Safeway	8HSB	14
DS1F1-B	Breco	1HPB	14

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
DS1F1-S	Breco	1HP	14
DS1F1-SS	Breco	1HP-SS	14
DS2F2-B	Breco	2HPB	14
DS2F2-S	Breco	2HP	14
DS2F2-SS	Breco	2HP-SS	14
DS3F3-B	Breco	3HPB	14
DS3F3-S	Breco	3HP	14
DS3F3-SS	Breco	3HP-SS	14
DS4F4-B	Breco	4HPB	14
DS4F4-S	Breco	4HP	14
DS4F4-SS	Breco	4HP-SS	14
DS6F6-B	Breco	6HPB	14
DS6F6-S	Breco	6HP	14
DS6F6-SS	Breco	6HP-SS	14
H1-62	Parker	1HS	14
H1-63	Parker	1HP	14
H1B	Foster	1HSB	14
H1F1	Perfecting	1HP	14
H1F1-B	Perfecting	1HPB	14
H1F1-S	Perfecting	1HP-SS	14
H1S	Foster	1HS	14
H1S/S	Foster	1HS-SS	14
H2-62	Parker	2HS	14
H2-63	Parker	2HP	14
H2B	Foster	2HSB	14
H2F2	Perfecting	2HP	14
H2F2-B	Perfecting	2HPB	14
H2F2-S	Perfecting	2HP-SS	14
H2S	Foster	2HS	14
H2S/S	Foster	2HS-SS	14
H3-62	Parker	3HS	14
H3-63	Parker	3HP	14
H3B	Foster	3HSB	14
H3F3	Perfecting	3HP	14
H3F3-B	Perfecting	3HPB	14
H3F3-S	Perfecting	3HP-SS	14
H3S	Foster	3HS	14
H3S/S	Foster	3HS-SS	14
H4-62	Parker	4HS	14
H4-63	Parker	4HP	14
H4B	Foster	4HSB	14
H4F4	Perfecting	4HP	14
H4F4-B	Perfecting	4HPB	14
H4F4-S	Perfecting	4HP-SS	14
H4S	Foster	4HS	14
H4S/S	Foster	4HS-SS	14
H6-62	Parker	6HS	14
H6-63	Parker	6HP	14
H6B	Foster	6HSB	14
H6F6	Perfecting	6HP	14
H6F6-B	Perfecting	6HPB	14
H6F6-S	Perfecting	6HP-SS	14
H6S	Foster	6HS	14
H6S/S	Foster	6HS-SS	14
H8-62	Parker	8HS	14
H8-63	Parker	8HP	14
H8B	Foster	8HSB	14
H8F8	Perfecting	8HP	14
H8F8-B	Perfecting	8HPB	14
H8F8-S	Perfecting	8HP-SS	14
H8S	Foster	8HS	14
H8S/S	Foster	8HS-SS	14
HN12NPTF	Faster	4HS	14
HN12NPTF-F2	Faster	4HS-SS	14
HN12NPTF5	Faster	4HSB	14
HN12NPTM	Faster	4HP	14
HN12NPTM-M2	Faster	4HP-SS	14
HN12NPTM5	Faster	4HPB	14
HN14NPTF	Faster	2HS	14
HN14NPTF-F2	Faster	2HS-SS	14
HN14NPTF5	Faster	2HSB	14
HN14NPTM	Faster	2HP	14

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
HN14NPTM-M2	Faster	2HP-SS	14
HN14NPTM5	Faster	2HPB	14
HN18NPTF	Faster	1HS	14
HN18NPTF-F2	Faster	1HS-SS	14
HN18NPTF5	Faster	1HSB	14
HN18NPTM	Faster	1HP	14
HN18NPTM-M2	Faster	1HP-SS	14
HN18NPTM5	Faster	1HPB	14
HN19NPTF	Faster	8HS	14
HN19NPTF-F2	Faster	8HS-SS	14
HN19NPTF5	Faster	8HSB	14
HN19NPTM	Faster	8HP	14
HN19NPTM-M2	Faster	8HP-SS	14
HN19NPTM5	Faster	8HPB	14
HN134NPTF	Faster	6HS	14
HN134NPTF5	Faster	6HSB	14
HN134NPTM	Faster	6HP	14
HN134NPTM-M2	Faster	6HP-SS	14
HN134NPTM5	Faster	6HPB	14
HN138NPTF	Faster	3HS	14
HN138NPTF2	Faster	3HS-SS	14
HN138NPTF5	Faster	3HSB	14
HN138NPTM	Faster	3HP	14
HN138NPTM2	Faster	3HP-SS	14
HN138NPTM5	Faster	3HPB	14
K1B	Foster	1HPB	14
K1S	Foster	1HP	14
K1S/S	Foster	1HP-SS	14
K2B	Foster	2HPB	14
K2S	Foster	2HP	14
K2S/S	Foster	2HP-SS	14
K3B	Foster	3HPB	14
K3S	Foster	3HP	14
K3S/S	Foster	3HP-SS	14
K4B	Foster	4HPB	14
K4S	Foster	4HP	14
K4S/S	Foster	4HP-SS	14
K6B	Foster	6HPB	14
K6S	Foster	6HP	14
K6S/S	Foster	6HP-SS	14
K8B	Foster	8HPB	14
K8S	Foster	8HP	14
K8S/S	Foster	8HP-SS	14
LL1-H11	Hansen	1HS-SS	14
LL1-K11	Hansen	1HP-SS	14
LL2-H16	Hansen	2HS-SS	14
LL2-K16	Hansen	2HP-SS	14
LL3-K21	Hansen	3HS-SS	14
LL3-K21	Hansen	3HP-SS	14
LL4-H26	Hansen	4HS-SS	14
LL4-K26	Hansen	4HP-SS	14
LL6-H31	Hansen	6HS-SS	14
LL6-K31	Hansen	6HP-SS	14
LL8-H36	Hansen	8HS-SS	14
LL8-K36	Hansen	8HP-SS	14
N/A	Dixon	1HP	14
N/A	Dixon	1HPB	14
N/A	Dixon	1HP-SS	14
N/A	Dixon	1HS	14
N/A	Dixon	1HSB	14
N/A	Dixon	1HS-SS	14
S101-1	Safeway	1HP	14
S101-2	Safeway	2HP	14
S101-3	Safeway	3HP	14
S101-4	Safeway	4HP	14
S101-6	Safeway	6HP	14
S101-8	Safeway	8HP	14
S105-1	Safeway	1HS	14
S105-2	Safeway	2HS	14
S105-3	Safeway	3HS	14
S105-4	Safeway	4HS	14

Hofmann Fluid Power Interchange HH Series and IH Series

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
2VF2	Perfecting	HHS2F2	15
2VF2-B	Perfecting	HHS2F2-B	15
2VF2-B-E	Perfecting	HHS2-B	15
2VF2-E	Perfecting	HHS2	15
2VF2-SS	Perfecting	HHS2F2-SS	15
2VF2-SS-E	Perfecting	HHS2-SS	15
2VM2	Perfecting	HHS2M2	15
2VM2-B	Perfecting	HHS2M2-B	15
2VM2-SS	Perfecting	HHS2M2-SS	15
3VF3	Perfecting	HHS3F3	15
3VF3-B	Perfecting	HHS3F3-B	15
3VF3-B-E	Perfecting	HHS3-B	15

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
3VF3-E	Perfecting	HHS3	15
3VF3-SS	Perfecting	HHS3F3-SS	15
3VF3-SS-E	Perfecting	HHS3-SS	15
3VM3	Perfecting	HHS3M3	15
3VM3-B	Perfecting	HHS3M3-B	15
3VM3-SS	Perfecting	HHS3M3-SS	15
4VF4	Perfecting	HHS4F4	15
4VF4-B	Perfecting	HHS4F4-B	15
4VF4-SS	Perfecting	HHS4F4-SS	15
4VM4	Perfecting	HHS4M4	15
4VM4-B	Perfecting	HHS4M4-B	15
4VM4-SS	Perfecting	HHS4M4-SS	15

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
5315K12	McMaster	HHS2F2	15
5315K13	McMaster	HHS3F3	15
5315K14	McMaster		



Crossover

Hofmann Fluid Power Interchange F Series

**** PLEASE NOTE** that some mfg's have higher PSI ratings than what is recommended for our products. Please be sure to check applications and psi information before crossing over, to ensure proper match. *This crossover is for reference only.*

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
100FP	Foster	8FPS	17
100FPB	Foster	8FPB	17
100FPS	Foster	8FP-SS	17
100FS	Foster	8FB	17
100FS/S	Foster	8F-SS	17
100MP	Foster	8FPMS	17
100MPB	Foster	8FPMB	17
100MPS	Foster	8FPMS-SS	17
100MS	Foster	8FMB	17
100MS/S	Foster	8FM-SS	17
12FP	Foster	1FPS	17
12FPB	Foster	1FPB	17
12FPS	Foster	1FP-SS	17
12FS	Foster	1FB	17
12FS/S	Foster	1F-SS	17
12MP	Foster	1FPMS	17
12MPB	Foster	1FPMB	17
12MPS	Foster	1FPMS-SS	17
12MS	Foster	1FMB	17
12MS/S	Foster	1FM-SS	17
1EF1-B	Perfecting	1FB	17
1EF1-S	Perfecting	1F-SS	17
1EM1-B	Perfecting	1FMB	17
1EM1-S	Perfecting	1FM-SS	17
1-S10	Hansen	1FMB	17
1-S11	Hansen	1FB	17
1STF1-B	Breco	1FB	17
1STF1-SS	Breco	1F-SS	17
1STM1-B	Breco	1FMB	17
1STM1-SS	Breco	1FM-SS	17
1-T10	Hansen	1FPMS	17
1-T11	Hansen	1FPS	17
2-215	Hansen	2FMB	17
2-216	Hansen	2FB	17
25FP	Foster	2FPS	17
25FPB	Foster	2FPB	17
25FPS	Foster	2FP-SS	17
25FS	Foster	2FB	17
25FS/S	Foster	2F-SS	17
25MP	Foster	2FPMS	17
25MPB	Foster	2FPMB	17
25MPS	Foster	2FPMS-SS	17
25MS	Foster	2FMB	17
25MS/S	Foster	2FM-SS	17
2EF2	Perfecting	2FB	17
2EF2-S	Perfecting	2F-SS	17
2EM2-B	Perfecting	2FMB	17
2EM2-S	Perfecting	2FM-SS	17
2STF2-B	Breco	2FB	17
2STF2-SS	Breco	2F-SS	17
2STM2-B	Breco	2FMB	17
2STM2-SS	Breco	2FM-SS	17
2-T15	Hansen	2FPMS	17
2-T16	Hansen	2FPB	17
38FP	Foster	3FPS	17
38FPB	Foster	3FPB	17
38FPS	Foster	3FP-SS	17
38FS	Foster	3FB	17
38FS/S	Foster	3F-SS	17
38MP	Foster	3FPMS	17
38MPB	Foster	3FPMB	17
38MPS	Foster	3FPMS-SS	17
38MS	Foster	3FMB	17
38MS/S	Foster	3FM-SS	17
3EF3-B	Perfecting	3FB	17
3EF3-S	Perfecting	3F-SS	17
3EM3-B	Perfecting	3FMB	17
3EM3-S	Perfecting	3FM-SS	17
3-S20	Hansen	3FMB	17
3-S21	Hansen	3FB	17
3-T20	Hansen	3FPMS	17
3-T21	Hansen	3FPS	17
4EF4	Perfecting	4FB	17
4EF4-S	Perfecting	4F-SS	17
4EM4	Perfecting	4FMB	17
4EM4-S	Perfecting	4FM-SS	17
4-S25	Hansen	4FMB	17
4-S26	Hansen	4FB	17
4STF4-SS	Breco	4F-SS	17
4STM4-SS	Breco	4FM-SS	17
4-T25	Hansen	4FPMS	17
4-T26	Hansen	4FPS	17
50FP	Foster	4FPS	17
50FPB	Foster	4FPB	17
50FPS	Foster	4FP-SS	17
50FS	Foster	4FB	17
50FS/S	Foster	4F-SS	17
50MP	Foster	4FPMS	17
50MPB	Foster	4FPMB	17
50MPS	Foster	4FPMS-SS	17
50MS	Foster	4FMB	17
50MS/S	Foster	4FM-SS	17
6537K11	McMaster	2FPB	17

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
6537K12	McMaster	3FPB	17
6537K13	McMaster	4FPB	17
6537K14	McMaster	6FPB	17
6537K15	McMaster	8FPB	17
6537K27	McMaster	8FM-SS	17
6537K43	McMaster	2FPMS	17
6537K44	McMaster	3FPMS	17
6537K45	McMaster	4FPMS	17
6537K46	McMaster	6FPMS	17
6537K47	McMaster	8FPMS	17
6537K53	McMaster	2FPS	17
6537K54	McMaster	3FPS	17
6537K55	McMaster	4FPS	17
6537K56	McMaster	6FPS	17
6537K57	McMaster	8FPS	17
6537K63	McMaster	2FMB	17
6537K64	McMaster	3FMB	17
6537K65	McMaster	4FMB	17
6537K66	McMaster	6FMB	17
6537K67	McMaster	8FMB	17
6537K73	McMaster	2FB	17
6537K74	McMaster	3FB	17
6537K75	McMaster	4FB	17
6537K76	McMaster	6FB	17
6537K77	McMaster	8FB	17
6537K91	McMaster	2FPMB	17
6537K92	McMaster	3FPMB	17
6537K93	McMaster	4FPMB	17
6537K94	McMaster	6FPMB	17
6537K95	McMaster	8FPMB	17
6543K23	McMaster	2FM-SS	17
6543K24	McMaster	3FM-SS	17
6543K25	McMaster	4FM-SS	17
6543K26	McMaster	6FM-SS	17
6543K33	McMaster	2F-SS	17
6543K34	McMaster	3F-SS	17
6543K35	McMaster	4F-SS	17
6543K36	McMaster	6F-SS	17
6543K37	McMaster	8F-SS	17
6543K43	McMaster	2FPM-SS	17
6543K44	McMaster	3FPM-SS	17
6543K45	McMaster	4FPM-SS	17
6543K46	McMaster	6FPM-SS	17
6543K47	McMaster	8FPM-SS	17
6543K53	McMaster	2FP-SS	17
6543K54	McMaster	3FP-SS	17
6543K55	McMaster	4FP-SS	17
6543K56	McMaster	6FP-SS	17
6543K57	McMaster	8FP-SS	17
6EF6	Perfecting	6FB	17
6EF6-S	Perfecting	6F-SS	17
6EM6	Perfecting	6FMB	17
6EM6-S	Perfecting	6FM-SS	17
6-S30	Hansen	6FMB	17
6-S31	Hansen	6FB	17
6STF6-SS	Breco	6F-SS	17
6STM6-SS	Breco	6FM-SS	17
6-T30	Hansen	6FPMS	17
6-T31	Hansen	6FPS	17
75FP	Foster	6FPS	17
75FPB	Foster	6FPB	17
75FPS	Foster	6FP-SS	17
75FS	Foster	6FB	17
75FS/S	Foster	6F-SS	17
75MP	Foster	6FPMS	17
75MPB	Foster	6FPMB	17
75MPS	Foster	6FPMS-SS	17
75MS	Foster	6FMB	17
75MS/S	Foster	6FM-SS	17
8EF8	Perfecting	8FB	17
8EF8-S	Perfecting	8F-SS	17
8EM8-B	Perfecting	8FMB	17
8EM8-S	Perfecting	8FM-SS	17
8-S35	Hansen	8FMB	17
8-S36	Hansen	8FB	17
8STF8-SS	Breco	8F-SS	17
8STM8-SS	Breco	8FM-SS	17
8-T35	Hansen	8FPMS	17
8-T36	Hansen	8FPS	17
B1-T10	Hansen	1FPMB	17
B1-T11	Hansen	1FPB	17
B2-T15	Hansen	2FPMB	17
B2-T16	Hansen	2FPB	17
B3-T20	Hansen	3FPMB	17
B3-T21	Hansen	3FPB	17
B4-T25	Hansen	4FPMB	17
B4-T26	Hansen	4FPB	17
B6-T30	Hansen	6FPMB	17
B6-T31	Hansen	6FPB	17
B8-T36	Hansen	8FPB	17
BST-1	Parker	1FB	17
BST-1M	Parker	1FMB	17
BST-2	Parker	2FB	17
BST-2M	Parker	2FMB	17
BST-3	Parker	3FB	17
BST-3M	Parker	3FMB	17
BST-4	Parker	4FB	17
BST-4M	Parker	4FMB	17
BST-4N	Parker	4FPB	17
BST-6	Parker	6FB	17
BST-6M	Parker	6FMB	17
BST-8	Parker	8FB	17
BST-8M	Parker	8FMB	17
BST-N1	Parker	1FPB	17
BST-N1M	Parker	1FPMB	17
BST-N2M	Parker	2FPMB	17
BST-N3	Parker	3FPB	17
BST-N3M	Parker	3FPMB	17
BST-N4M	Parker	4FPMB	17
BST-N6M	Parker	6FPB	17
BST-N6M	Parker	6FPMB	17
BST-N8	Parker	8FPB	17
BST-N8M	Parker	8FPMB	17
BST-NS	Parker	2FPB	17
E1F1	Perfecting	1FPS	17
E1F1-B	Perfecting	1FPB	17
E1F1-S	Perfecting	1FP-SS	17
E1M1	Perfecting	1FPMS	17
E1M1-B	Perfecting	1FPMB	17
E1M1-S	Perfecting	1FPMS-SS	17
E2F2	Perfecting	2FPS	17
E2F2-B	Perfecting	2FPB	17
E2F2-S	Perfecting	2FP-SS	17
E2M2	Perfecting	2FPMS	17
E2M2-B	Perfecting	2FPMB	17
E2M2-S	Perfecting	2FPMS-SS	17
E3F3	Perfecting	3FPS	17
E3F3-B	Perfecting	3FPB	17
E3F3-S	Perfecting	3FP-SS	17
E3M3	Perfecting	3FPMB	17
E3M3	Perfecting	3FPMS	17
E3M3-S	Perfecting	3FPMS-SS	17
E4F4	Perfecting	4FPS	17
E4F4-B	Perfecting	4FPB	17
E4F4-S	Perfecting	4FP-SS	17
E4M4	Perfecting	4FPMS	17
E4M4-B	Perfecting	4FPMB	17
E4M4-S	Perfecting	4FPMS-SS	17
E6F6	Perfecting	6FPS	17
E6F6-B	Perfecting	6FPB	17
E6F6-S	Perfecting	6FP-SS	17
E6M6	Perfecting	6FPMS	17
E6M6-B	Perfecting	6FPMB	17
E6M6-S	Perfecting	6FPMS-SS	17
E8F8	Perfecting	8FPS	17
E8F8-B	Perfecting	8FPB	17
E8F8-S	Perfecting	8FP-SS	17
E8M8	Perfecting	8FPMS	17
E8M8-B	Perfecting	8FPMB	17
E8M8-S	Perfecting	8FPMS-SS	17
LL1-S10	Hansen	1FM-SS	17
LL1-S11	Hansen	1F-SS	17
LL1-T10	Hansen	1FPMS-SS	17
LL1-T11	Hansen	1FP-SS	17
LL2-S15	Hansen	2FM-SS	17
LL2-S16	Hansen	2F-SS	17
LL2-T15	Hansen	2FPMS-SS	17
LL2-T16	Hansen	2FP-SS	17
LL3-S20	Hansen	3FM-SS	17
LL3-S21	Hansen	3F-SS	17
LL3-T20	Hansen	3FPMS-SS	17
LL3-T21	Hansen	3FP-SS	17
LL4-S25	Hansen	4FM-SS	17
LL4-S26	Hansen	4F-SS	17
LL4-T25	Hansen	4FPMS-SS	17
LL4-T26	Hansen	4FP-SS	17
LL6-S30	Hansen	6FM-SS	17
LL6-S31	Hansen	6F-SS	17
LL6-T30	Hansen	6FPMS-SS	17
LL6-T31	Hansen	6FP-SS	17
LL8-S35	Hansen	8FM-SS	17
LL8-S36	Hansen	8F-SS	17
LL8-T36	Hansen	8FP-SS	17
SP1	Tomco	1FPB	17
SP1 303	Tomco	1FP-SS	17
SP1M	Tomco	1FPMB	17
SP1M 303	Tomco	1FPMS-SS	17
SP1M-S	Tomco	1FPMS	17
SP1-S	Tomco	1FPS	17
SP2	Tomco	2FPB	17
SP2-303	Tomco	2FP-SS	17
SP2M	Tomco	2FPMB	17
SP2M-303	Tomco	2FPMS-SS	17
SP2M-S	Tomco	2FPMS	17
SP2-S	Tomco	2FPS	17
SP3	Tomco	3FPB	17
SP3-303	Tomco	3FP-SS	17
SP3M	Tomco	3FPMB	17
SP3M-303	Tomco	3FPMS-SS	17
SP3M-S	Tomco	3FPMS	17
SP3-S	Tomco	3FPS	17
SP4	Tomco	4FPB	17
SP4-303	Tomco	4FP-SS	17
SP4M	Tomco	4FPMB	17
SP4M-303	Tomco	4FPMS-SS	17
SP4MS	Tomco	4FPMS	17
SP4S	Tomco	4FPS	17
SP6	Tomco	6FPB	17
SP6M	Tomco	6FPMB	17
SP6MS	Tomco	6FPMS	17
SP6S	Tomco	6FPS	17
SP8	Tomco	8FPB	17
SP8M	Tomco	8FPMB	17
SP8MS	Tomco	8FPMS	17

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
BST-2M	Parker	2FMB	17
BST-3	Parker	3FB	17
BST-3M	Parker	3FMB	17
BST-4	Parker	4FB	17
BST-4M	Parker	4FMB	17
BST-4N	Parker	4FPB	17
BST-6	Parker	6FB	17
BST-6M	Parker	6FMB	17
BST-8	Parker	8FB	17
BST-8M	Parker	8FMB	17
BST-N1	Parker	1FPB	17
BST-N1M	Parker	1FPMB	17
BST-N2M	Parker	2FPMB	17
BST-N3	Parker	3FPB	17
BST-N3M	Parker	3FPMB	17
BST-N4M	Parker	4FPMB	17
BST-N6M	Parker	6FPB	17
BST-N6M	Parker	6FPMB	17
BST-N8	Parker	8FPB	17
BST-N8M	Parker	8FPMB	17
BST-NS	Parker	2FPB	17
E1F1	Perfecting	1FPS	17
E1F1-B	Perfecting	1FPB	17
E1F1-S	Perfecting	1FP-SS	17
E1M1	Perfecting	1FPMS	17
E1M1-B	Perfecting	1FPMB	17
E1M1-S	Perfecting	1FPMS-SS	17
E2F2	Perfecting	2FPS	17
E2F2-B	Perfecting	2FPB	17
E2F2-S	Perfecting	2FP-SS	17
E2M2	Perfecting	2FPMS	17
E2M2-B	Perfecting	2FPMB	



Hofmann Fluid Power Interchange F Series

****PLEASE NOTE** that some mfg's have higher PSI ratings than what is recommended for our products. Please be sure to check applications and psi information before crossing over, to ensure proper match. **This crossover is for reference only.**

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
SP8S	Tomco	8FPS	17
SST-1	Parker	1F-SS	17
SST-1M	Parker	1FM-SS	17
SST-1M	Parker	1FPM-SS	17
SST-2	Parker	2F-SS	17
SST-2M	Parker	2FM-SS	17
SST-3	Parker	3F-SS	17
SST-3M	Parker	3FM-SS	17
SST-4M	Parker	4FM-SS	17
SST-6	Parker	6F-SS	17
SST-6M	Parker	6FM-SS	17
SST-8	Parker	8F-SS	17
SST-8M	Parker	8FM-SS	17
SST-N1	Parker	1FP-SS	17
SST-N2	Parker	2FP-SS	17
SST-N2M	Parker	2FPM-SS	17
SST-N3	Parker	3FP-SS	17
SST-N3M	Parker	3FPM-SS	17
SST-N4	Parker	4FP-SS	17
SST-N4M	Parker	4FPM-SS	17
SST-N6	Parker	6FP-SS	17
SST-N6M	Parker	6FPM-SS	17
SST-N8	Parker	8FP-SS	17
SST-N8M	Parker	8FPM-SS	17
ST1	Tomco	1FB	17
ST1 303	Tomco	1F-SS	17
ST1F1-B	Breco	1FPB	17
ST1F1-S	Breco	1FPS	17
ST1F1-SS	Breco	1FP-SS	17
ST1M	Tomco	1FMB	17
ST1M 303	Tomco	1FM-SS	17
ST1M1-S	Breco	1FPMSS	17
ST1M1-SS	Breco	1FPM-SS	17
ST2	Tomco	2FB	17
ST2-303	Tomco	2F-SS	17
ST2F2-B	Breco	2FPB	17
ST2F2-S	Breco	2FPS	17
ST2FS-SS	Breco	2FP-SS	17

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
ST2M	Tomco	2FMB	17
ST2M 303	Tomco	2FM-SS	17
ST2M2-B	Breco	2FPMB	17
ST2M2-SS	Breco	2FPMS	17
ST2M2-SS	Breco	2FPM-SS	17
ST3	Tomco	3FB	17
ST3-303	Tomco	3F-SS	17
ST3M	Tomco	3FMB	17
ST3M 303	Tomco	3FM-SS	17
ST4	Tomco	4FB	17
ST4-303	Tomco	4F-SS	17
ST4M	Tomco	4FMB	17
ST4M-303	Tomco	4FM-SS	17
ST6	Tomco	6FB	17
ST6M	Tomco	6FMB	17
ST8	Tomco	8FB	17
ST8M	Tomco	8FMB	17
STFC2	Dixon	2FB	17
STFC2SS	Dixon	2F-SS	17
STFC3	Dixon	3FB	17
STFC3	Breco	3FB	17
STFC4	Dixon	4FB	17
STFC4	Breco	4FB	17
STFC4SS	Dixon	4F-SS	17
STFC6	Dixon	6FB	17
STFC6	Breco	6FB	17
STFC6SS	Dixon	6FM-SS	17
STFC6SS	Dixon	6F-SS	17
STFC8	Dixon	8FB	17
STFC8	Breco	8FB	17
STFC8SS	Dixon	8F-SS	17
STFP2	Dixon	2FPS	17
STFP23	Dixon	2FPB	17
STFP2SS	Dixon	2FP-SS	17
STFP3	Dixon	3FPS	17
STFP3	Dixon	3FP-SS	17
STFP3	Breco	3FPS	17
STFP3	Breco	3FP-SS	17
STFP3B	Dixon	3FPB	17

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
STFP3B	Breco	3FPB	17
STFP3SS	Dixon	3F-SS	17
STFP3SS	Breco	3F-SS	17
STFP4	Dixon	4FPS	17
STFP4	Breco	4FPS	17
STFP4B	Dixon	4FPB	17
STFP4B	Breco	4FPB	17
STFP4SS	Dixon	4FP-SS	17
STFP4SS	Breco	4FP-SS	17
STFP6	Dixon	6FPS	17
STFP6	Breco	6FPS	17
STFP6B	Dixon	6FPB	17
STFP6B	Breco	6FPB	17
STFP6SS	Dixon	6FP-SS	17
STFP6SS	Breco	6FP-SS	17
STFP8B	Dixon	8FPB	17
STFP8B	Dixon	8FPS	17
STFP8B	Breco	8FPB	17
STFP8B	Breco	8FPS	17
STFP8SS	Dixon	8FP-SS	17
STFP8SS	Breco	8FP-SS	17
STMI-B	Breco	1FPMB	17
STMC2	Dixon	1FMB	17
STMC2	Dixon	2FMB	17
STMC2SS	Dixon	2FM-SS	17
STMC3	Dixon	3FMB	17
STMC3	Breco	3FMB	17
STMC3SS	Dixon	3FM-SS	17
STMC3SS	Breco	3FM-SS	17
STMC4	Dixon	4FMB	17
STMC4	Breco	4FMB	17
STMC4SS	Dixon	4FM-SS	17
STMC6	Dixon	6FMB	17
STMC6	Breco	6FMB	17
STMC8	Dixon	8FMB	17
STMC8	Breco	8FMB	17
STMC8SS	Dixon	8FM-SS	17
STMP2	Dixon	1FPMS	17
STMP2	Dixon	2FPMS	17

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
STMP23	Dixon	2FPMB	17
STMP2SS	Dixon	2FPM-SS	17
STMP3	Dixon	3FPMS	17
STMP3	Breco	3FPMS	17
STMP3B	Dixon	3FPMB	17
STMP3B	Breco	3FPMB	17
STMP3SS	Dixon	3FPM-SS	17
STMP3SS	Breco	3FPM-SS	17
STMP4	Dixon	4FPMS	17
STMP4	Breco	4FPMS	17
STMP4B	Dixon	4FPMB	17
STMP4B	Breco	4FPMB	17
STMP4SS	Dixon	4FPM-SS	17
STMP4SS	Breco	4FPM-SS	17
STMP6	Dixon	6FPMS	17
STMP6	Breco	6FPMS	17
STMP6B	Dixon	6FPMB	17
STMP6B	Breco	6FPMB	17
STMP6SS	Dixon	6FPM-SS	17
STMP6SS	Breco	6FPM-SS	17
STMP8B	Dixon	8FPMS	17
STMP8B	Dixon	8FPMB	17
STMP8B	Breco	8FPMB	17
STMP8B	Breco	8FPMS	17
STMP8SS	Dixon	8FPM-SS	17
STMP8SS	Breco	8FPM-SS	17
ST-N1	Parker	1FPS	17
ST-N1M	Parker	1FPMS	17
ST-N2M	Parker	2FPMS	17
ST-N3	Parker	3FPS	17
ST-N3M	Parker	3FPMS	17
ST-N4	Parker	4FPS	17
ST-N4M	Parker	4FPMS	17
ST-N6	Parker	6FPS	17
ST-N6M	Parker	6FPMS	17
ST-N8	Parker	8FPS	17
ST-N8M	Parker	8FPMS	17
ST-NS	Parker	2FPS	17

Hofmann Fluid Power Interchange HAL Series and HSS Series

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
AL-050	Kuriyama	HAL-A050	18
AL-A075	Kuriyama	HAL-A075	18
AL-A100	Kuriyama	HAL-A100	18
AL-A125	Kuriyama	HAL-A125	18
AL-A150	Kuriyama	HAL-A150	18
AL-A200	Kuriyama	HAL-A200	18
AL-A250	Kuriyama	HAL-A250	18
AL-A300	Kuriyama	HAL-A300	18
AL-B050	Kuriyama	HAL-B050	18
AL-B075	Kuriyama	HAL-B075	18
AL-B100	Kuriyama	HAL-B100	18
AL-B125	Kuriyama	HAL-B125	18
AL-B150	Kuriyama	HAL-B150	18
AL-B200	Kuriyama	HAL-B200	18
AL-B250	Kuriyama	HAL-B250	18
AL-B300	Kuriyama	HAL-B300	18
AL-C050	Kuriyama	HAL-C050	18
AL-C075	Kuriyama	HAL-C075	18
AL-C100	Kuriyama	HAL-C100	18
AL-C125	Kuriyama	HAL-C125	18
AL-C150	Kuriyama	HAL-C150	18
AL-C200	Kuriyama	HAL-C200	18
AL-C250	Kuriyama	HAL-C250	18
AL-C300	Kuriyama	HAL-C300	18
AL-D050	Kuriyama	HAL-D050	18
AL-D075	Kuriyama	HAL-D075	18
AL-D100	Kuriyama	HAL-D100	18
AL-D125	Kuriyama	HAL-D125	18
AL-D150	Kuriyama	HAL-D150	18
AL-D200	Kuriyama	HAL-D200	18
AL-D250	Kuriyama	HAL-D250	18
AL-D300	Kuriyama	HAL-D300	18
AL-DC050	Kuriyama	HAL-DC050	18
AL-DC075	Kuriyama	HAL-DC075	18
AL-DC100	Kuriyama	HAL-DC100	18
AL-DC125	Kuriyama	HAL-DC125	18

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
AL-DC150	Kuriyama	HAL-DC150	18
AL-DC200	Kuriyama	HAL-DC200	18
AL-DC250	Kuriyama	HAL-DC250	18
AL-DC300	Kuriyama	HAL-DC300	18
AL-DP050	Kuriyama	HAL-DP050	18
AL-DP075	Kuriyama	HAL-DP075	18
AL-DP100	Kuriyama	HAL-DP100	18
AL-DP125	Kuriyama	HAL-DP125	18
AL-DP150	Kuriyama	HAL-DP150	18
AL-DP200	Kuriyama	HAL-DP200	18
AL-DP250	Kuriyama	HAL-DP250	18
AL-DP300	Kuriyama	HAL-DP300	18
AL-E050	Kuriyama	HAL-E050	18
AL-E075	Kuriyama	HAL-E075	18
AL-E100	Kuriyama	HAL-E100	18
AL-E125	Kuriyama	HAL-E125	18
AL-E150	Kuriyama	HAL-E150	18
AL-E200	Kuriyama	HAL-E200	18
AL-E250	Kuriyama	HAL-E250	18
AL-E300	Kuriyama	HAL-E300	18
AL-F050	Kuriyama	HAL-F050	18
AL-F075	Kuriyama	HAL-F075	18
AL-F100	Kuriyama	HAL-F100	18
AL-F125	Kuriyama	HAL-F125	18
AL-F150	Kuriyama	HAL-F150	18
AL-F200	Kuriyama	HAL-F200	18
AL-F250	Kuriyama	HAL-F250	18
AL-F300	Kuriyama	HAL-F300	18
SS-A050	Kuriyama	HSS-A050	18
SS-A075	Kuriyama	HSS-A075	18
SS-A100	Kuriyama	HSS-A100	18
SS-A125	Kuriyama	HSS-A125	18
SS-A150	Kuriyama	HSS-A150	18
SS-A200	Kuriyama	HSS-A200	18
SS-A250	Kuriyama	HSS-A250	18
SS-A300	Kuriyama	HSS-A300	18

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
SS-B050	Kuriyama	HSS-B050	18
SS-B075	Kuriyama	HSS-B075	18
SS-B100	Kuriyama	HSS-B100	18
SS-B125	Kuriyama	HSS-B125	18
SS-B150	Kuriyama	HSS-B150	18
SS-B200	Kuriyama	HSS-B200	18
SS-B250	Kuriyama	HSS-B250	18
SS-B300	Kuriyama	HSS-B300	18
SS-C050	Kuriyama	HSS-C050	18
SS-C075	Kuriyama	HSS-C075	18
SS-C100	Kuriyama	HSS-C100	18
SS-C125	Kuriyama	HSS-C125	18
SS-C150	Kuriyama	HSS-C150	18
SS-C200	Kuriyama	HSS-C200	18
SS-C250	Kuriyama	HSS-C250	18
SS-C300	Kuriyama	HSS-C300	18
SS-D050	Kuriyama	HSS-D050	18
SS-D075	Kuriyama	HSS-D075	18
SS-D100	Kuriyama	HSS-D100	18
SS-D125	Kuriyama	HSS-D125	18
SS-D150	Kuriyama	HSS-D150	18
SS-D200	Kuriyama	HSS-D200	18
SS-D250	Kuriyama	HSS-D250	18
SS-D300	Kuriyama	HSS-D300	18
SS-DC050	Kuriyama	HSS-DC050	18
SS-DC075	Kuriyama	HSS-DC075	18
SS-DC100	Kuriyama	HSS-DC100	18
SS-DC125	Kuriyama	HSS-DC125	18
SS-DC150	Kuriyama	HSS-DC150	18
SS-DC200	Kuriyama	HSS-DC200	18
SS-DC250	Kuriyama	HSS-DC250	18
SS-DC300	Kuriyama	HSS-DC300	18
SS-D050	Kuriyama	HSS-DP050	18
SS-DP075	Kuriyama	HSS-DP075	18
SS-DP100	Kuriyama	HSS-DP100	18
SS-DP125	Kuriyama	HSS-DP125	18

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
SS-DP150	Kuriyama	HSS-DP150	18
SS-DP200	Kuriyama	HSS-DP200	18
SS-DP250	Kuriyama	HSS-DP250	18
SS-DP300	Kuriyama	HSS-DP300	18
SS-E050	Kuriyama	HSS-E050	18
SS-E075	Kuriyama	HSS-E075	18
SS-E100	Kuriyama	HSS-E100	18
SS-E125	Kuriyama	HSS-E125	18
SS-E150	Kuriyama	HSS-E150	18
SS-E200	Kuriyama	HSS-E200	18
SS-E250	Kuriyama	HSS-E250	18
SS-E300	Kuriyama	HSS-E300	18
SS-F050	Kuriyama	HSS-F050	18
SS-F075	Kuriyama	HSS-F075	18
SS-F100	Kuriyama	HSS-F100	18
SS-F125	Kuriyama	HSS-F125	18
SS-F150	Kuriyama	HSS-F150	18
SS-F200	Kuriyama	HSS-F200	18
SS-F250	Kuriyama	HSS-F250	18
SS-F300	Kuriyama	HSS-F300	18
50-A-AL	Dixon	HAL-A050	18
75-A-AL	Dixon	HAL-A075	18
100-A-AL	Dixon	HAL-A100	18
125-A-AL	Dixon	HAL-A125	18
150-A-AL	Dixon	HAL-A150	18
200-A-AL	Dixon	HAL-A200	18
250-A-AL	Dixon	HAL-A250	18
300-A-AL	Dixon	HAL-A300	18
50-B-AL	Dixon	HAL-B075	18
75-B-AL	Dixon	HAL-B100	18
100-B-AL	Dixon	HAL-B125	18
150-B-AL	Dixon	HAL-B150	18
200-B-AL	Dixon	HAL-B200	18
250-B-AL	Dixon	HAL-B250	18
300-B-AL	Dixon	HAL-B300	18
75-C-AL	Dixon	HAL-C075	18

Crossover



Hofmann Fluid Power Interchange HJT Series

****PLEASE NOTE** that some mfg's have higher PSI ratings than what is recommended for our products. Please be sure to check applications and psi information before crossing over, to ensure proper match. *This crossover is for reference only.*

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
FS215	Foster	HS215	19
FS215V	Foster	HS215V	19
FS216	Foster	HS216	19
FS216P	Foster	HS216P	19
FS216V	Foster	HS216V	19
FS216VP	Foster	HS216VP	19
FS224	Foster	HS224	19
FS224P	Foster	HS224P	19
FS224V	Foster	HS224V	19
FS224VP	Foster	HS224VP	19
FS225	Foster	HS225	19
FS225V	Foster	HS225V	19
FS226	Foster	HS226	19
FS226P	Foster	HS226P	19
FS226V	Foster	HS226V	19
FS226VP	Foster	HS226VP	19
FS306	Foster	HS306	19
FS306P	Foster	HS306P	19
FS306V	Foster	HS306V	19
FS306V2	Foster	HS306V2	19
FS306VP	Foster	HS306VP	19
FS306VP2	Foster	HS306VP2	19
FS308	Foster	HS308	19
FS308P	Foster	HS308P	19
FS308V	Foster	HS308V	19
FS308V2	Foster	HS308V2	19
FS308V2	Foster	HS328V2	19
FS308VP	Foster	HS308VP	19
FS308VP2	Foster	HS308VP2	19
FS316	Foster	HS316	19
FS316P	Foster	HS316P	19
FS316V	Foster	HS316V	19
FS316V2	Foster	HS316V2	19
FS316VP	Foster	HS316VP	19
FS316VP	Foster	HS318VP	19
FS316VP2	Foster	HS316VP2	19
FS318	Foster	HS318	19
FS318P	Foster	HS318P	19
FS318V	Foster	HS318V	19
FS318V2	Foster	HS318V2	19
FS318VP2	Foster	HS318VP2	19
FS326	Foster	HS326	19
FS326P	Foster	HS326P	19
FS326V	Foster	HS326V	19
FS326V2	Foster	HS326V2	19
FS326VP	Foster	HS326VP	19
FS326VP2	Foster	HS326VP2	19
FS328	Foster	HS328	19
FS328P	Foster	HS328P	19
FS328V	Foster	HS328V	19
FS328VP	Foster	HS328VP	19
FS328VP2	Foster	HS328VP2	19
FS500	Foster	HS500	19
FS504	Foster	HS504	19
FS504P	Foster	HS504P	19
FS506	Foster	HS506	19
FS506P	Foster	HS506P	19
FS514	Foster	HS514	19
FS514P	Foster	HS514P	19
FS516	Foster	HS516	19
FS516P	Foster	HS516P	19
FS524	Foster	HS524	19
FS524P	Foster	HS524P	19
FS526	Foster	HS526	19
FS526P	Foster	HS526P	19
FTP-251	Hansen	HP251	20
FTP-251-F	Hansen	HP251F	20
FTP-252	Hansen	HP252	20
FTP-252-F	Hansen	HP252F	20
FTP-253	Hansen	HP253	20
FTP-253-F	Hansen	HP253F	20
FTP-352	Hansen	HP352	20
FTP-352-F	Hansen	HP352F	20
FTP-353	Hansen	HP353	20
FTP-353-F	Hansen	HP353F	20
FTP-554	Hansen	HP554	20
FTP-554-F	Hansen	HP554F	20
FTP-556	Hansen	HP556	20
FTP-556-F	Hansen	HP556F	20
FTS-204	Hansen	HS200V	19
FTS-204HP	Hansen	HS204	19
FTS-204V	Hansen	HS204P	19
FTS-205	Hansen	HS205	19
FTS-205V	Hansen	HS205V	19
FTS-206	Hansen	HS206	19
FTS-206HP	Hansen	HS206P	19
FTS-206V	Hansen	HS206V	19
FTS-214	Hansen	HS214	19
FTS-214	Hansen	HS214VP	19
FTS-214HP	Hansen	HS214P	19
FTS-214V	Hansen	HS214V	19
FTS-215	Hansen	HS215	19
FTS-215V	Hansen	HS215V	19

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
FTS-216	Hansen	HS216	19
FTS-216HP	Hansen	HS216P	19
FTS-216V	Hansen	HS216V	19
FTS-224	Hansen	HS224	19
FTS-224HP	Hansen	HS224P	19
FTS-224V	Hansen	HS224V	19
FTS-225	Hansen	HS225	19
FTS-225V	Hansen	HS225V	19
FTS-226	Hansen	HS226	19
FTS-226HP	Hansen	HS226P	19
FTS-226V	Hansen	HS226V	19
FTS-316	Hansen	HS316	19
FTS-316HP	Hansen	HS316P	19
FTS-316V	Hansen	HS316V	19
FTS-318	Hansen	HS318	19
FTS-318HP	Hansen	HS318P	19
FTS-318V	Hansen	HS318V	19
HK2-86106	Rectus	HS204V	19
HK2-86106/45	Rectus	HS224V	19
HK2-86106/90	Rectus	HS214V	19
HK2-86108	Rectus	HS205V	19
HK2-86108/45	Rectus	HS225V	19
HK2-86108/90	Rectus	HS215V	19
HK2-86110	Rectus	HS206V	19
HK2-86110/45	Rectus	HS226V	19
HK2-86110/90	Rectus	HS216V	19
HK2-862B	Rectus	HS200V	19
HK2-86906/45	Rectus	HS204V	19
HK2-86906/45	Rectus	HS214V	19
HK2-86906/45	Rectus	HS206VP	19
HK2-86910	Rectus	HS206VP	19
HK2-86910/45	Rectus	HS226VP	19
HK2-86910/90	Rectus	HS216VP	19
HK2-87110	Rectus	HS306V	19
HK2-87110/45	Rectus	HS326V	19
HK2-87110-90	Rectus	HS316V	19
HK2-87113	Rectus	HS308V	19
HK2-87113	Rectus	HS308VP	19
HK2-87113/90	Rectus	HS318V	19
HK2-87113/90	Rectus	HS328V	19
HK2-87910	Rectus	HS306VP	19
HK2-87910/45	Rectus	HS326VP	19
HK2-87910/90	Rectus	HS316P	19
HK2-87910/90	Rectus	HS316VP	19
HK2-87913/90	Rectus	HS328VP	19
JP251F	Jiffy-tite	HP251F	20
JP252	Jiffy-tite	HP252	20
JP252F	Jiffy-tite	HP252F	20
JP253	Jiffy-tite	HP253	20
JP352	Jiffy-tite	HP352	20
JP352F	Jiffy-tite	HP352F	20
JP353	Jiffy-tite	HP353	20
JP353F	Jiffy-tite	HP353F	20
JP-353-SV	Jiffy-tite	HP353V	20
JP354	Jiffy-tite	HP354	20
JP554	Jiffy-tite	HP554	20
JP554F	Jiffy-tite	HP554F	20
JP556	Jiffy-tite	HP556	20
JP556F	Jiffy-tite	HP556F	20
JS200	Jiffy-tite	HS200	19
JS200V	Jiffy-tite	HS200V	19
JS204	Jiffy-tite	HS204	19
JS205	Jiffy-tite	HS205	19
JS205V	Jiffy-tite	HS205V	19
JS206	Jiffy-tite	HS206	19
JS206V	Jiffy-tite	HS206V	19
JS214	Jiffy-tite	HS214	19
JS214V	Jiffy-tite	HS214V	19
JS215	Jiffy-tite	HS215	19
JS215V	Jiffy-tite	HS215V	19
JS216	Jiffy-tite	HS216	19
JS216V	Jiffy-tite	HS216V	19
JS224	Jiffy-tite	HS224	19
JS224V	Jiffy-tite	HS224V	19
JS225	Jiffy-tite	HS225	19
JS225V	Jiffy-tite	HS225V	19
JS226	Jiffy-tite	HS226	19
JS226V	Jiffy-tite	HS226V	19
JS308	Jiffy-tite	HS308	19
JS308SV	Jiffy-tite	HS308V2	19
JS308V	Jiffy-tite	HS308V	19
JS318	Jiffy-tite	HS318	19
JS318SV	Jiffy-tite	HS318V2	19
JS318V	Jiffy-tite	HS318V	19
JS328	Jiffy-tite	HS328	19
JS328SV	Jiffy-tite	HS328V2	19
JS328V	Jiffy-tite	HS328V	19
JS500	Jiffy-tite	HS500	19
JS516	Jiffy-tite	HS506	19
JS526	Jiffy-tite	HS526	19
K3-86106	Rectus	HS204	19
K3-86106/45	Rectus	HS224	19


Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
K3-86106/90	Rectus	HS214	19
K3-86108/45	Rectus	HS225	19
K3-86108/90	Rectus	HS215	19
K3-86110	Rectus	HS205	19
K3-86110	Rectus	HS206	19
K3-86110/90	Rectus	HS216	19
K3-86110/45	Rectus	HS226	19
K3-862-B	Rectus	HS200	19
K3-86906	Rectus	HS204P	19
K3-86906/45	Rectus	HS224P	19
K3-86906/90	Rectus	HS214P	19
K3-86910	Rectus	HS206P	19
K3-86910/45	Rectus	HS226P	19
K3-86910/90	Rectus	HS216P	19
K3-87110	Rectus	HS306	19
K3-87110/90	Rectus	HS316	19
K3-87110/90	Rectus	HS326	19
K3-87113	Rectus	HS308	19
K3-87113/45	Rectus	HS328	19
K3-87113/90	Rectus	HS318	19
K3-87910/45	Rectus	HS306P	19
K3-87910/45	Rectus	HS326P	19
K3-87913	Rectus	HS308P	19
K3-87913/45	Rectus	HS328P	19
K3-87913/90	Rectus	HS318P	19
K3-88113	Rectus	HS504	19
K3-88113/90	Rectus	HS514	19
K3-88119	Rectus	HS506	19
K3-88119/90	Rectus	HS516	19
MC200	Tomco	HS200	19
MC200V	Tomco	HS200V	19
MC204	Tomco	HS204	19
MC204P	Tomco	HS204P	19
MC204V	Tomco	HS204V	19
MC204VP	Tomco	HS204VP	19
MC205	Tomco	HS205	19
MC205V	Tomco	HS205V	19
MC206	Tomco	HS206	19
MC206P	Tomco	HS206P	19
MC206V	Tomco	HS206V	19
MC206VP	Tomco	HS206VP	19
MC214	Tomco	HS214	19
MC214P	Tomco	HS214P	19
MC214V	Tomco	HS214V	19
MC214VP	Tomco	HS214VP	19
MC215	Tomco	HS215	19
MC215V	Tomco	HS215V	19
MC216	Tomco	HS216	19
MC216P	Tomco	HS216P	19
MC216V	Tomco	HS216V	19
MC216VP	Tomco	HS216VP	19
MC224	Tomco	HS224	19
MC224P	Tomco	HS224P	19
MC224V	Tomco	HS224V	19
MC224VP	Tomco	HS224VP	19
MC225	Tomco	HS225	19
MC225V	Tomco	HS225V	19
MC226	Tomco	HS226	19
MC226P	Tomco	HS226P	19
MC226V	Tomco	HS226V	19
MC226VP	Tomco	HS226VP	19
MC306	Tomco	HS306	19
MC306P	Tomco	HS306P	19
MC306V	Tomco	HS306V	19
MC306VP	Tomco	HS306VP	19
MC308	Tomco	HS308	19
MC308P	Tomco	HS308P	19
MC308V	Tomco	HS308V	19
MC308VP	Tomco	HS308VP	19
MC316	Tomco	HS316	19
MC316P	Tomco	HS316P	19
MC316V	Tomco	HS316V	19
MC318	Tomco	HS318	19
MC318P	Tomco	HS318P	19
MC318V	Tomco	HS318V	19
MC318VP	Tomco	HS318VP	19
MC326	Tomco	HS326	19
MC326P	Tomco	HS326P	19
MC326V	Tomco	HS326V	19
MC326VP	Tomco	HS326VP	19
MC328	Tomco	HS328	19
MC328P	Tomco	HS328P	19
MC328V	Tomco	HS328V	19
MC328VP	Tomco	HS328VP	19
MC328VP2	Tomco	HS328VP2	19
MP251	Tomco	HP251	20
MP251F	Tomco	HP251F	20
MP252	Tomco	HP252	20
MP252F	Tomco	HP252F	20
MP253	Tomco	HP253	20
MP253F	Tomco	HP253F	20
MP352	Tomco	HP352	20
MP352F	Tomco	HP352F	20

Competitor's Part Number	Competitor Name	Hofmann's Part Number	Page No.
MP353	Tomco	HP353	20
MP353F	Tomco	HP353F	20
MP354	Tomco	HP354	20
MP554	Tomco	HP554	20
MP554F	Tomco	HP554F	20
MP556	Tomco	HP556	20
MP556F	Tomco	HP556F	20
N3-862B-S	Rectus	HP251F	20
N3-862D-S	Rectus	HP252F	20
N3-862F-S	Rectus	HP253F	20
N3-863B-M	Rectus	HP251	20
N3-863D-M	Rectus	HP252	20
N3-863F-M	Rectus	HP253	20
N3-873D-M	Rectus	HP352	20
N3-873F-M	Rectus	HP353	20
N3-873G-M	Rectus	HP354	20
N3-882G-S	Rectus	HP554F	20
N3-882H-M	Rectus	HP556	20
N3-882H-S	Rectus	HP556F	

Hydraulic and Pneumatic Quick Disconnect Couplings

Pneumatic Fittings

PVC, Polyethylene, Nylon, Polyurethane Hose and Tubing

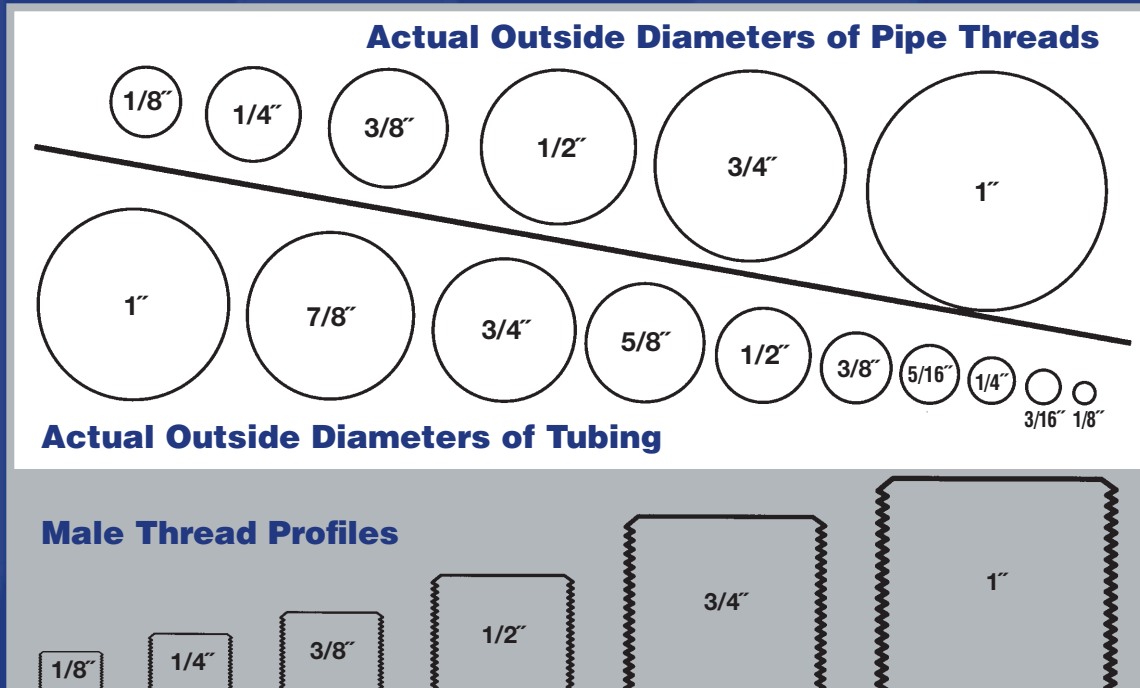

Distributed By:

Hofmann Fluid Power, Inc. 2108 McDonough Street, Joliet, IL 60436

To Order: Call 815-744-8300 • Fax 815-744-9770 • Online www.hofmannfluidpower.com
sales@hofmannfluidpower.com